


MAX REACH FROM CENTER
3.1M




MAX PAYLOAD
23.6 KG

MAX HEIGHT
3.6M



MAX SPEED
7 M/S

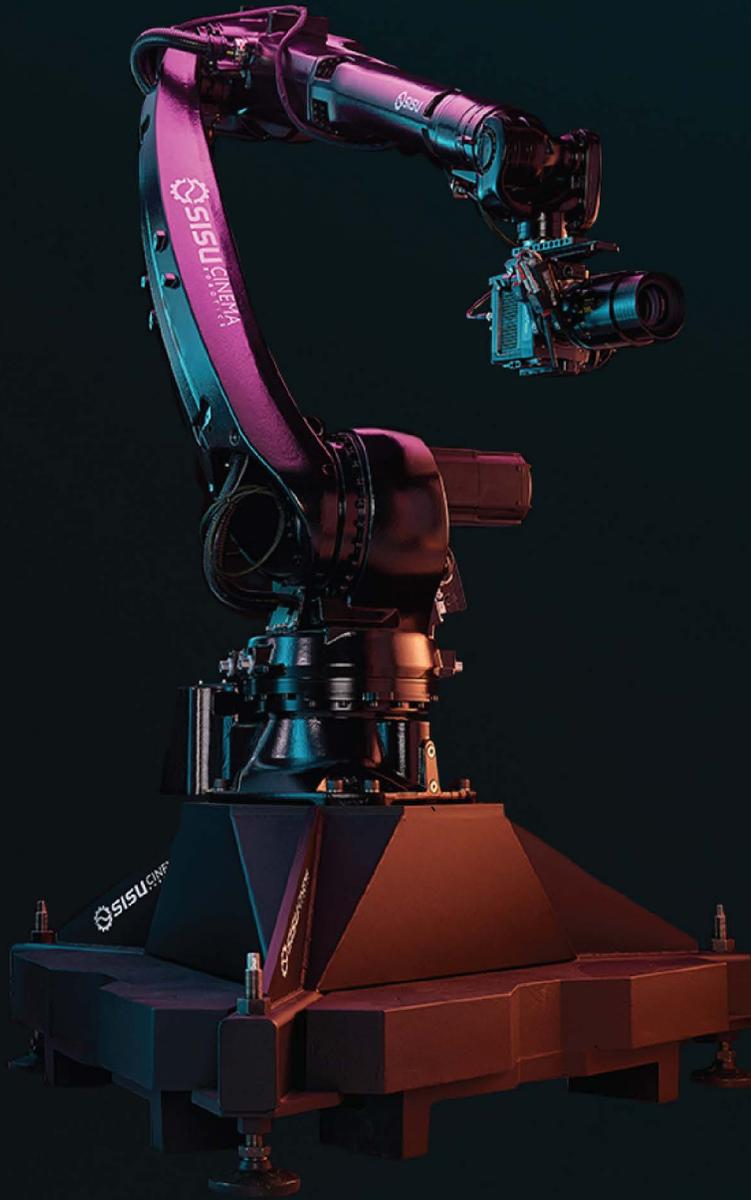

INCLUDED HARDWARE:

- ROBOT ON PEDESTAL
- CONTROLS CABINET
- FIZ MOTORS
- CAMERA MOUNT
- COMBO CABLE
- REMOVABLE WEIGHTS
- SISU WAND, TABLET & CASE

LOWEST POSITION
-2.1M



PEDESTAL FOOTPRINT
1.55M x 1.55M



INTUITIVE
HAND CONTROL



FAMILIAR
TIMELINE INTERFACE



TARGET
TRACKING



ARCS &
ORBITS



VFX
INTEGRATION



EXTERNAL
DEVICES



DEEPER SPECS

DIMENSIONS

MAX HEIGHT	3.6m
LOWEST POSITION	-2.1m
MAX REACH FROM CENTER	3.1m
BASE FOOTPRINT	1.55m x 1.55m

REPEATABILITY

REPEATABILITY	0.05mm
---------------	--------

SHOOTING SPEEDS

MAX LINEAR MOVE	2.01m/s
MAX OVERALL SPEED	7m/s

WEIGHT

ROBOT	549kg
RATED PAYLOAD	20kg
MAX PAYLOAD	23.6kg
CONTROLS CABINET	160kg
TOTAL SYSTEM WEIGHT	2275kg

POWER*

MAX POWER	14kW
VOLTAGE	3 x 480V
MAX CURRENT	16A
POWER CABLE	23ft
ROBOT TO CONTROLS CABLE	23ft or 49ft
PLUG TYPE	SCM420P7W IP67 20A 3-phase
COMPATIBLE SOCKET OUTLETS	IEC60309

TEMPERATURE

MIN	0 C
MAX	45 C



C31



*Additional power options are available. Contact sales@sisu.us for more information.
For more detailed specs, see the manual.