


VISION **Moonlight**

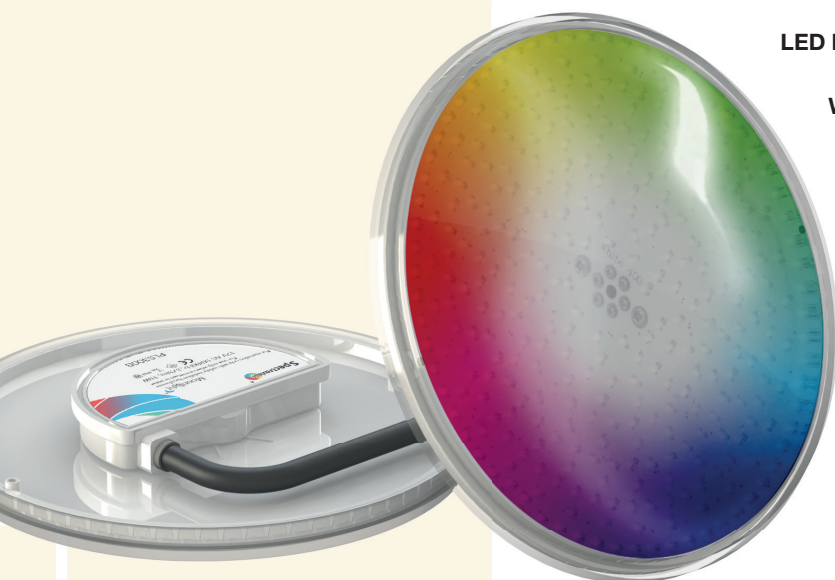

Included in packaging:
- Moonlight light
- 4 metres non-removable 2-wire cable
- Retrofit kit PAR56 niche

LED lights available in different luminous flux levels and colours.

Wide beam angle shadow-free pool lighting.

Polymer housing, **compatible with salt-electrolysis**.

RGB: 16 fixed colour programs.

PAR56 niche **retrofit** solution.

Operates on 12VAC.

4 meters non-removable 2-wire cable.

Easy installation with Moonlight mounting kit.

Available finishes



The VISION Moonlight mounting kit PZM170-RM-WH comes with a wall conduit and white Face Plate. Optionally, a stainless steel Face Plate PZM170-RV-SS is available to click over the white Face Plate.

Technical Specifications

		WHITE			RGB		
PRODUCT CODE		PLW300B	PLW400B	PLW700B	PLS300B	PLS400B	PLS700B
Diameter	mm	170	170	170	170	170	170
Nominal colour temp.	K	9000			-		
Max. light output	lm	1350	2400	3500	800	1550	2200
Beam angle	°	120			120		
Max. power	W	14	23	35	13	23	33
VA Transformer	VA	18	30	46	17	30	43
Nominal input voltage	VAC	12			12		
Water temp.	°C	up to 40			up to 40		
Warranty	year	2			2		

To combine with

MOUNTING KIT	OPTIONAL FACE PLATES	CONTROL / POWER SUPPLY
PZM170-RM-WH	PZM170-RV-SS	LINK Driver p. 82