


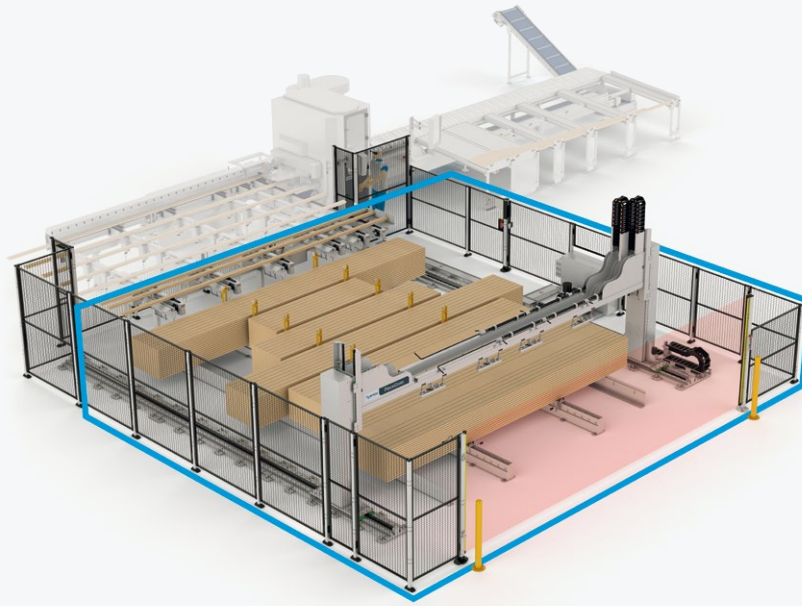

PieceGiver

SPECIFICATIONS

The PieceGiver allows for multiple modules. These specifications are for a 2 module PieceGiver.

Overall length, width, height	34.60 x 29.32 x 10.17ft
Min lumber dimensions	2.76 x 1.38in
Max lumber dimensions	11.81 x 1.77in
Min/Max feed lengths	94.49 – 236.22in
Machine mass	11700lb
Electrical requirement	415V 63A 3Ph + Neutral & Earth
Air requirement	1.413CFM avg. 17.657CFM Peak @ 100psi (PieceGiver) 8.829CFM avg. 18.54CFM Peak @ 100psi (Bow Flipper)* *The Bow Flipper is connected to the PieceMaker infeed deck

* Specifications & design are subject to change, please confirm details when placing your order.

* The PieceGiver does not include the PieceMaker - this is a separate product which is shown greyed out in the above image.

OVERVIEW

Optimize your cutting operations, increase machine runtime and reduce repetitive injury by introducing the PieceGiver to your workflow. Load the lumber trolleys and let the system do the rest.

FEATURES

- Fast, accurate lumber delivery
- Features a low lumber warning system
- Camber is checked as the lumber is being picked and flipped on the infeed deck if required
- Picks a variety of lumber and sizes up to 11.81 x 1.77 LVL
- Safety light curtain and fenced to protect operator
- Retrofittable to any PieceMaker saw
- Picks and delivers 2 lengths of lumber during each pass
- 1 person operation for PieceGiver and PieceMaker

OPTIONS

- Left or right hand feed
- Customizable bunker quantity depending on your stock requirements

