



ERV25C

STRENGTHS

- ✓ Improved energy classification due to the use of R-290 refrigerant, electronic fans and optimized air circulation for better interior temperature uniformity.
Greater precision in temperature control.
Incorporation of LED lighting, reducing energy consumption between 80% and 90%.

		ERV25-ERV25C-ERV35	
Operating temp	+4°C / +12°C		
Climate class	4 (30°C, 55%HR)		
Capacity (l)	320		
Overall dimensions LxDxH (mm)	900 x 510 x 920		
Cabinet Construction			
Exterior Material		Plastic-coated steel, black	
Back Material		Plastic-coated steel, black	
Interior Material		Plastic-coated steel, grey	
Interior Construction		Rounded interior corner	
Drain	✗		
LED lighting	✓		
Insulation		Polyurethane with high density 40kg/m3, CFCs free, zero ODP and low GWP	
Blowing Agent	HFO		
Features			
Doors	2		
Door construction		-	
Door lock	✓		
Door frame heaters	-		
Shelving	2		
Shelves dimensions LxD (mm)	-		
Legs, casters		Levellers	
Refrigeration			
Thermostat		Digital controller	
Defrost	-		
Expansion Device		Capillary	
Electronic fans	✗		


Condensation		Forced-air	
Evaporation		Evaporator with anti corrosion epoxy coating	
Technical Features			
Refrigerant	R290		
Ref amount (gr)	110		
Power Supply	230V / 1 / 50 Hz		
Refrigeration Capacity (W)	370		
Power (W)	318		
Amps (A)	1,72		
Energy Consumption (kWh/24h)	-		
Energy Class	-		
Crating			
Crated dimensions L x l x H (mm)	950 x 600 x 1.080		
Crated volume (l)	422		
Net Weight (kg)	84		
Crated Weight (kg)	110		
Options			
		LED RGB	
		Wire shelves (502x27)	
		Wire shelves (502x28)	
		Wire shelves (502x31)	
		115V/1ph/60Hz	
		230V/1ph/60Hz	

DATA SHEET
CHEST BOTTLE COOLER
ERV25C




Rev: 12/06/2026


ELEVATION



PLAN VIEW




RIGHT VIEW



ERV25C

CONNECTION

MODELS	A (mm)
ERV25C	500

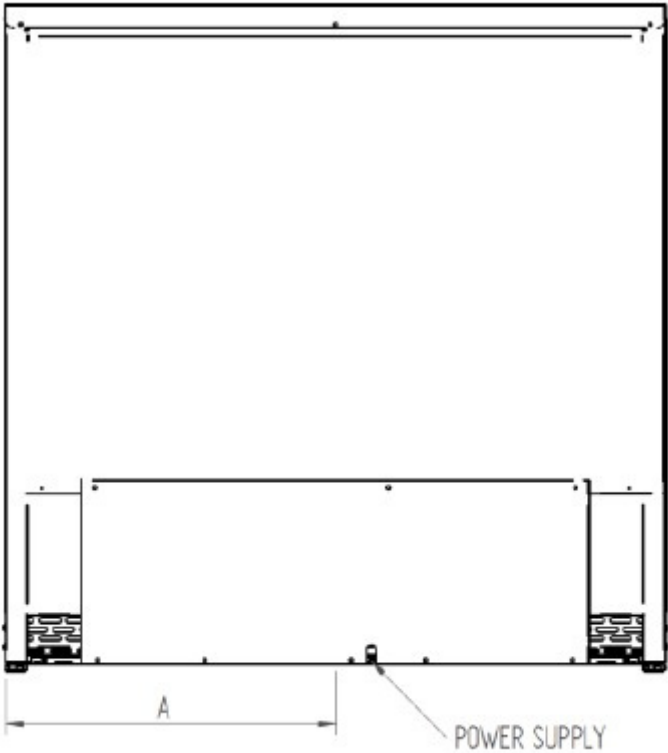

www.infrico.com
info@infrico.com
Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la conception peuvent etre sujettes à modifications, sans préavis



Rev: 01 Fecha/Date: 12/06/2026 FT_ERV25_00_ES_EN_FR_19_01_FT_ERV25C_00_ES_EN_FR_19_01_FT_ERV35_00_ES_EN_FR_19_01