


AQUA NEON HIGH OUTPUT WAVE: PVC - 24V


Submersible Pool Rated Linear Flex Profile - Static Whites



PROFILE CAPABILITIES




LIGHT SURFACE




TOP BENDING

MIN BENDING DIAMETER



11.81IN (300MM)

CERTIFICATIONS & FEATURES*

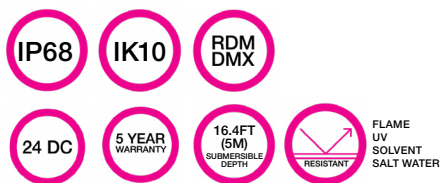

TEMPERATURES

AMBIENT OPERATING TEMPERATURE:

Above Water: -4°F to 113°F (-20°C to 45°C)
Underwater ≤16.5W/m: -4°F to 95°F (-20°C to 35°C)

AMBIENT INSTALLATION TEMPERATURE:

≥-32°F (0°C)

FIXTURE STORAGE TEMPERATURE:

-4°F to 140°F (-20°C to 60°C)

MAX MOUNTING SURFACE TEMPERATURE:

140°F (60°C)

HUMIDITY (NON-CONDENSING):

0-95%

THERMAL MANAGEMENT:

Free Air Convection

FIXTURE ORDER CODE

E		A				B		
INPUT CONNECTORS	SERIES	MATERIAL	PROFILE	BENDING	JACKET/BASE + LENS COLOR	LED FUNCTION	LED COLOR	CHIP + CRI
See Page 5 to select input connector	A = Aqua Neon	2 = PVC	F = Wave	2 = Top	W = White + Diffused	1 = Static	H = 2200K J = 2700K L = 3000K M = 3500K N = 4000K Q = 5700K	2 = Epistar SMD LED Chip + CRI80
C		D	E	F				
POWER	VOLTAGE + CIRCUIT TYPE**	ORDER UNIT LENGTH	OUTPUT CONNECTOR	MOUNTING PROFILE		POWER SUPPLIES & CONTROLS:		
G = 3.66W/ft (12W/m) I = 4.57W/ft (15W/m)	2C = 24V DC CC	D = 2.19in (55.6mm)	See Page 5 to select output connector	See Page 8 to select mounting profile		By Others By GLLS		

*Maximum IP and IK ratings achievable with appropriate accessories, and cable diameter: PVC static = 0.24in (6mm). **The Constant Current (CC) Integrated Circuit extends max run length. Do not use a CC power supply, as it may cause damage.

AQUA NEON HIGH OUTPUT WAVE: PVC - 24V

Submersible Pool Rated Linear Flex Profile - Static Whites



A

MECHANICAL

ASSEMBLY

Fixtures are carefully assembled using high-quality components to ensure durability and performance. Each unit is built to meet strict specifications, with attention to electrical safety, thermal management, and optical alignment.

OVERALL & CUTTING LENGTHS

Fixtures feature defined overall lengths and specific cutting increments for easy customization. Cutting must be done at marked points to maintain proper function and consistent light output.

JACKET COLOR

The white jacket with diffused white lens covers provide a clean, uniform appearance while softening light output for reduced glare. It enhances visual comfort and delivers smooth, even illumination ideal for architectural and display applications.

BENDING RADIUS

Do not bend smaller than allowed minimum bend diameter, or may cause damage to the light & void warranty.

OPERATION

LIGHT ENGINE

Static Pulse Width Modulation (PWM) light engines deliver stable, flicker-free light at a fixed brightness. They offer consistent color and reliable performance for long-term applications.

ELECTRICAL

Designed to meet UL, CE, and RoHS standards, they feature overload, overvoltage, and short-circuit protection, along with low EMI and efficient thermal management for safe, reliable operation.

DIMMING

Dimming controls for 24V Static PWM systems include 0-10V, RDM DMX, and DALI protocols. These options allow smooth, flicker-free dimming while maintaining consistent color and performance across fixtures.

GENERAL

WARRANTY

Limited 5-Year Warranty against defects in materials and manufacturing. Coverage applies to properly installed and maintained products. Damage from misuse or improper installation is not covered. GLLS may repair, replace, or issue credit for eligible claims.

LUMEN MAINTENANCE

GLLS static lighting fixtures are tested to IES LM-84 and projected with IES TM-28 to ensure consistent lumen maintenance. Fixtures are designed to retain at least 70% of their initial brightness (L70) over a 10-year lifespan when properly installed and operated.

CERTIFICATION

Tested to UL676 by Underwriters Laboratory for use in the USA and Canada. Exceeds CSA C22.2, CE, and RoHS standards. Must be used under Class 2 ratings to maintain certification.

UL Certificate #: E509134

Report Reference #: E509134-20190918

TESTING

OPTICAL TESTING

TEST	RESULTS
Spectrum Analysis	IES LM 79 (Lumen, CCT, CRI, XY, SDCM, Wavelength)
Photometric Distribution	IES LM 79
Lumen Maintenance & Lifetime	IES LM 84 & IES TM28

ENVIRONMENTAL TESTING

TEST	RESULTS
Salt Water Immersion	IEC60598-1, Saltinity 4%
Salt Spray Test	IEC60068-2-11
Outdoor Exposure	Manufacturer-defined
Flame Resistance	UL94
UV Exposure	ASTMG 154, ISO 4892-3, UVA @ 340nm & 55
IPX8	EN 60598-1: 2015+A1:2018 Clause 9.2.2 & 9.2.8
Temperature Shock(Silicone)	Manufacturer-defined, -40°C - 60°C (typical temperature range)
Constant Temperature	Manufacturer-defined
12mm Needle Flame Test (Silicone)	IEC60695-11-5
650 Glow-wire Test (Silicone)	IEC60695-2-10

TEMPERATURE TESTING

TEST	RESULTS
Normal Temperature Test	UL1598 & UL2388 & IEC60598-1 & IEC60598-2-21
Abnormal Operation Test	UL1598 & UL2388 & IEC60598-1 & IEC60598-2-21

DURABILITY TESTING

TEST	RESULTS
Bending Test	Manufacturer-defined, 500 cycles
Tensile Test	Manufacturer-defined, > The weight of light in max.
Twist Test	Manufacturer-defined, >200 cycles
Ball Impact	UL1598 & UL2388 & IEC60598-1 & IEC60598-2-21
IK	IEC62262



GLLS.COM | 1-888-580-6366

GLLS reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance. REV. 20251105


AQUA NEON HIGH OUTPUT WAVE: PVC - 24V

Submersible Pool Rated Linear Flex Profile - Static Whites



B

LED COLORS



FIXTURE SPECIFICATIONS & OPTICAL PARAMETERS - WHITE JACKET + DIFFUSED LENS - SIDE BEND

COLOR	LED CHIP + CRI	LED COUNT	1 CONNECTOR FULL/DYNAMIC*	2 CONNECTORS FULL/DYNAMIC**	FIXTURE COLOR TOLERANCE***	WAVELENGTH/CCT	LED CRI	LED COLOR TOLERANCE	LUMEN COUNT
2200K	Epistar SMD LED Chip + CRI80	33 LEDs/ft (108 LEDs/m)	19.52ft (6m) / NA	N/A / N/A	3 SDCM	2238~±102K	82-87	<2.3SDCM	168lm/ft (550lm/m)
2200K	Epistar SMD LED Chip + CRI80	33 LEDs/ft (108 LEDs/m)	15.75ft(4.8m) / NA	N/A / N/A	3 SDCM	2238~±102K	82-87	<2.3SDCM	213lm/ft (700lm/m)
2700K	Epistar SMD LED Chip + CRI80	33 LEDs/ft (108 LEDs/m)	19.52ft (6m) / NA	N/A / N/A	3 SDCM	2725~±145K	82-87	<2.3SDCM	198lm/ft (650lm/m)
2700K	Epistar SMD LED Chip + CRI80	33 LEDs/ft (108 LEDs/m)	15.75ft(4.8m) / NA	N/A / N/A	3 SDCM	2725~±145K	82-87	<2.3SDCM	244lm/ft (800lm/m)
3000K	Epistar SMD LED Chip + CRI80	33 LEDs/ft (108 LEDs/m)	19.52ft (6m) / NA	N/A / N/A	3 SDCM	3045~±175K	82-87	<2.3SDCM	198lm/ft (650lm/m)
3000K	Epistar SMD LED Chip + CRI80	33 LEDs/ft (108 LEDs/m)	15.75ft(4.8m) / NA	N/A / N/A	3 SDCM	3045~±175K	82-87	<2.3SDCM	244lm/ft (800lm/m)
3500K	Epistar SMD LED Chip + CRI80	33 LEDs/ft (108 LEDs/m)	19.52ft (6m) / NA	N/A / N/A	3 SDCM	3465~±245K	82-87	<2.3SDCM	229lm/ft (750lm/m)
3500K	Epistar SMD LED Chip + CRI80	33 LEDs/ft (108 LEDs/m)	15.75ft(4.8m) / NA	N/A / N/A	3 SDCM	3465~±245K	82-87	<2.3SDCM	274lm/ft (900lm/m)
4000K	Epistar SMD LED Chip + CRI80	33 LEDs/ft (108 LEDs/m)	19.52ft (6m) / NA	N/A / N/A	3 SDCM	3985~±275K	82-87	<2.3SDCM	229lm/ft (750lm/m)
4000K	Epistar SMD LED Chip + CRI80	33 LEDs/ft (108 LEDs/m)	15.75ft(4.8m) / NA	N/A / N/A	3 SDCM	3985~±275K	82-87	<2.3SDCM	274lm/ft (900lm/m)
5700K	Epistar SMD LED Chip + CRI80	33 LEDs/ft (108 LEDs/m)	19.52ft (6m) / NA	N/A / N/A	3 SDCM	5669~±355K	82-87	<2.3SDCM	213lm/ft (700lm/m)
5700K	Epistar SMD LED Chip + CRI80	33 LEDs/ft (108 LEDs/m)	15.75ft(4.8m) / NA	N/A / N/A	3 SDCM	5669~±355K	82-87	<2.3SDCM	259lm/ft (850lm/m)

*Run length is based on a static full load. As per CLASS 2 power supply standards, the maximum allowable fixture power is limited to a single 100W supply. **Double Feeding is Prohibited. ***PVC products maintain ≤3 SDCM within a production run and <6 SDCM between production runs.



AQUA NEON HIGH OUTPUT WAVE: PVC - 24V

Submersible Pool Rated Linear Flex Profile - Static Whites



C

POWER & VOLTAGE

COLOR	VOLTAGE + CIRCUIT TYPE*	POWER CONSUMPTION
2200K	24V DC CC	3.66W/ft (12W/m)
2200K		4.57W/ft (15W/m)
2700K		3.66W/ft (12W/m)
2700K		4.57W/ft (15W/m)
3000K		3.66W/ft (12W/m)
3000K		4.57W/ft (15W/m)
3500K		3.66W/ft (12W/m)
3500K		4.57W/ft (15W/m)
4000K		3.66W/ft (12W/m)
4000K		4.57W/ft (15W/m)
5700K		3.66W/ft (12W/m)
5700K		4.57W/ft (15W/m)

*The Constant Current (CC) Integrated Circuit extends max run length. Do not use a CC power supply, as it may cause damage.

D

CUTTING INSTRUCTIONS

COLOR	ORDER UNIT (CUTTING UNIT)
2200K	2.19in (55.6mm)
2700K	
3000K	
3500K	
4000K	
5700K	



AQUA NEON HIGH OUTPUT WAVE: PVC - 24V

Submersible Pool Rated Linear Flex Profile - Static Whites



E

COMPATIBLE CONNECTORS

INPUT - 01

INPUT CONNECTOR TYPE	INPUT ORIENTATION + TYPE	INPUT CABLE LENGTH (LEAD WIRE)
----------------------	--------------------------	--------------------------------

OUTPUT - 02

OUTPUT CONNECTOR TYPE	OUTPUT ORIENTATION + TYPE	OUTPUT CABLE LENGTH (LEAD WIRE)
3 = PVC Submersible	A = End Exit B = Bottom Exit C = Side Left Exit D = Side Right Exit I = End Cap	4 = 16ft (5m) 5 = 32.81ft (10m) 8 = N/A

LEGACY CONNECTOR ORDER CODE

FA	16E	2	00	2W	PO	X	XX	XXX	X
PRODUCT TYPE	PROFILE	BENDING	LIGHT EMITTING	FUNCTIONALITY	CONNECTOR TYPE	FIXTURE END	EXIT TYPE	LENGTH	
FA = Factory Accessories	16E = Wave	2 = Top	00 = 16E	2W = Static/DTW	PO = Submersible	1 = Input Side 2 = Output Side 0 = Jumpers/T-feeds/ Seamless Bottom/ Seamless End 3 = Input/Output	EN = End BO = Bottom SL = Side Left SR = Side Right EC = End Cap	05M = 16ft (5m) 10M = 32.81ft (10m) 000 = For End Cap	P = Power or For End Cap S = Signal & Power

AQUA NEON HIGH OUTPUT WAVE: PVC - 24V

Submersible Pool Rated Linear Flex Profile - Static Whites



E

PVC SUBMERSIBLE CONNECTOR




NOTES:


1. Connector Tolerance ± 0.02 in (0.5mm)
2. Cable diameter: Static, Tunable & SPI PVC = 0.24in (6mm)
3. Do not apply force to the feed cable
4. Ensure Max. Cable Lengths are followed according to wire gage to avoid voltage drop

IP68; extremely durable, underwater, UL676 rated. Recommended for; long-term submersed in wet environments up to the depth of 16.40ft (5m) (water is skin safe for extended periods); high temperature and humidity environments (mounting surface temperature $< 140^{\circ}\text{F}$ (60°C)); custom predetermined lengths and larger connector; harsh working conditions & increased handling forces during installation. Custom factory assembly.


END EXIT: 3-A-#




END CAP: 3-I-8



SCREW LOCK CONNECTOR ACCESSORY - IP67



BOTTOM EXIT: 3-B-#



NOTE: The tolerance is ± 0.08 in (2mm).



GLLS.COM | 1-888-580-6366

GLLS reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance. REV. 20251105


AQUA NEON HIGH OUTPUT WAVE: PVC - 24V

Submersible Pool Rated Linear Flex Profile - Static Whites




E

SIDE LEFT EXIT: 3-C-#

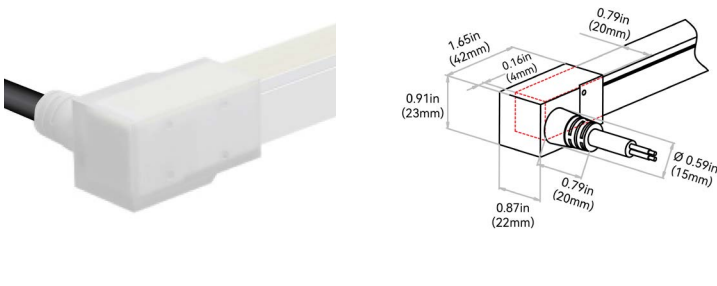

SIDE RIGHT EXIT: 3-D-#

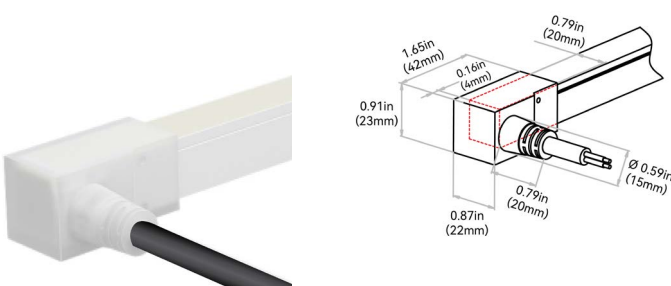

AQUA NEON HIGH OUTPUT WAVE: PVC - 24V

Submersible Pool Rated Linear Flex Profile - Static Whites



F

MOUNTING PROFILES

MOUNTING PROFILE TYPE	STANDARD LENGTH	PROFILE	COLOR
P1 = Plastic Reinforced	2 = 1.38in (35mm)	F = Wave	1 = Standard
	3 = 19.68in (500mm)		
	5 = 39.37in (1000mm)		
	6 = 78.74in (2000mm)		
C1 = Silicone Flexible	F = 2.16in (55mm)	F = Wave	2 = Black 3 = White 0 = Custom
	B = 4.33in (110mm)		
	C = 7.87in (200mm)		
	3 = 19.68in (500mm)		
	5 = 39.37in (1000mm)		



AQUA NEON HIGH OUTPUT WAVE: PVC - 24V


Submersible Pool Rated Linear Flex Profile - Static Whites



F

SILICONE PROFILE - FLEXIBLE

An all-in-one mounting profile designed to unleash your creativity. This profile not only provides flexibility in installation methods, but also overcomes bending limitations by offering both top and side bending in a single profile. Fully encapsulated in UL-certified silicone, it excels in UV, weather, and corrosion resistance, making it suitable for underwater, high and low temperature environments. Elegant and square in appearance, it is available in black or white standard colors, or bespoke colors to blend in with the background. Supported by innovative serrated silicone fins, its clamping strength is strong enough to secure any installation method. Please refer to install manual for proper installation practices. Side and top bending.



Tolerance: ± 0.01 in (0.3mm)



APPLICABLE AUXILIARY MATERIALS



Rubber Expansion Anchor




M3 Stainless Steel Self-tapping Screw



Anti-chlorine Waterproof Adhesive (Not provided)




NOTES: 1. 2-L1 refers to two of symmetric L1 in each piece of profile.
2. (N-1)-L2 refers to (N minus one) of symmetric L2 in each piece of profile.
"N" hereby stands for its corresponding "Hole Number" in the below table

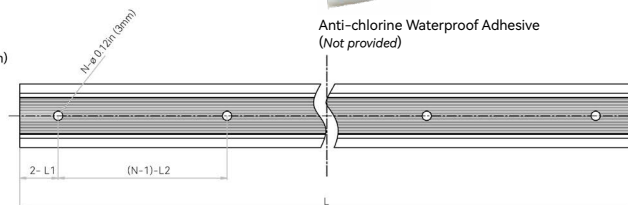


ORDER CODE	LEGACY ORDER CODE: WHITE	LEGACY ORDER CODE: BLACK	STANDARD LENGTH	L1	L2	SLOTTED HOLE	HOLE #
C1-F-F-X	CH16FAN5C5SEW	CH16FAN5C5SEB	2.16in (55mm)	0.49in (12.5mm)	1.18in (30mm)	$\varnothing 0.12$ in (3mm)	2
C1-B-F-X	CH16FAN1C1SEW	CH16FAN1C1SEB	4.33in (110mm)	0.46in (11.6mm)	3.48in (88.4mm)	$\varnothing 0.12$ in (3mm)	2
C1-C-F-X	CH16FAN0M2SEW	CH16FAN0M2SEB	7.87in (200mm)	0.46in (11.6mm)	3.48in (88.4mm)	$\varnothing 0.12$ in (3mm)	3
C1-3-F-X	CH16FAN0M5SEW	CH16FAN0M5SEB	19.68in (500mm)	1.14in (29mm)	3.48in (88.4mm)	$\varnothing 0.12$ in (3mm)	6
C1-5-F-X	CH16FAN01MSEW	CH16FAN01MSEB	39.37in (1000mm)	0.54in (13.8mm)	3.48in (88.4mm)	$\varnothing 0.12$ in (3mm)	12

PLASTIC PROFILE - REINFORCED

High quality rigid plastic designed to securely hold fixtures. Recommended for use in extreme environments susceptible to increased water/humidity (SPA's and pools). Please refer to install manual for proper installation practices.



Tolerance: ± 0.02 in (0.5mm)



APPLICABLE AUXILIARY MATERIALS



Rubber Expansion Anchor




M3 Stainless Steel Self-tapping Screw



Anti-chlorine Waterproof Adhesive (Not provided)



NOTES: 1. 2-L1 refers to two of symmetric L1 in each piece of profile.
2. (N-1)-L2 refers to (N minus one) of symmetric L2 in each piece of profile.
"N" hereby stands for its corresponding "Hole Number" in the below table

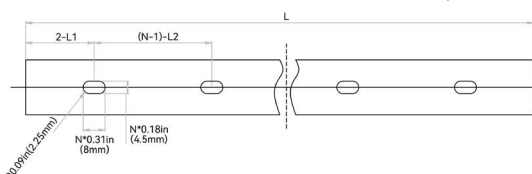

ORDER CODE	LEGACY ORDER CODE	STANDARD LENGTH	L1	L2	SLOTTED HOLE	HOLE #
P1-2-F-1	CL16RTP3C5SSD	1.38in (35mm)	0.69in (17.5mm)	N/A	0.18"0.31in (4.5*8mm)	1
P1-3-F-1	CH16RTP0M5SSD	19.68in (500mm)	1.97in (50mm)	7.87in (200mm)	0.18"0.31in (4.5*8mm)	3
P1-5-F-1	CH16RTP01MSD	39.37in (1000mm)	3.93in (100mm)	7.87in (200mm)	0.18"0.31in (4.5*8mm)	5
P1-6-F-1	CH16RTP02MSD	78.74in (2000mm)	3.93in (100mm)	7.87in (200mm)	0.18"0.31in (4.5*8mm)	10



GLLS.COM | 1-888-580-6366

GLLS reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance. REV. 20251105