

P SERIES

TOP MOUNTED PLASTIC SAND FILTERS



Designed and engineered
in the USA

WWW.FIBROPOOL.COM
WWW.FIBROPOOL.AE

P SERIES HIGH RATE SWIMMING POOL SAND FILTER FOR USA, AMERICSA, EUROPE, MIDDLE EAST AND AUSTRALIA

P Series Sand Top Mounted Sand filters are traditional blow moulded plastic high rate sand Filters.

Available in variety of sizes including 14",16",18",21",25",27"inch, catering to diverse pool requirements. Utilizes sand as afiltration medium, allowing for effective and efficient cleaning.Suitable for above ground pools up to 15,000 gallons offering abroad connections, ensuring compatibility with both hard andflexible piping.
Features a compact desing for easy installation,making it anexcellent choice for various pool setups. Engineered to workwith chlorine or salt water pools. Includes a multi-positionvalve for precise control of the filtration process.


Fibropool Co LLC is the first company in USA to introduce the infinitive connectors in year 2002.

TECHNICAL INFORMATION

Model	ØD (mm)	Height (mm)	Flow Rate (m³/h)	Filter Area (m²)	Connections (mm)	Sand (kg)
P350	350	745	4.5	0.1	48/50	25
P400	400	770	6.0	0.13	48/50	30
P450	450	815		0.16	48/50	45
P500	530	860	9	0.20	48/50	85
P650	630	960	15	0.32	48/50	150
P700	700	1030	17	0.38	48/50	200

DIMENSIONS

Model	P350	P400	P450	P500	P650	P700
ØD(mm)	350	400	450	530	630	700
H(mm)	745	770	815	860	960	1030
A(mm)	485	510	555	600	700	770
B(mm)	73	73	75	75	95	95
M(mm)	609	609	674	719	819	889
N(mm)	550	550	615	660	760	830
ØP(mm)	320	320	390	390	565	690
T(mm)	150	160	220	260	370	450

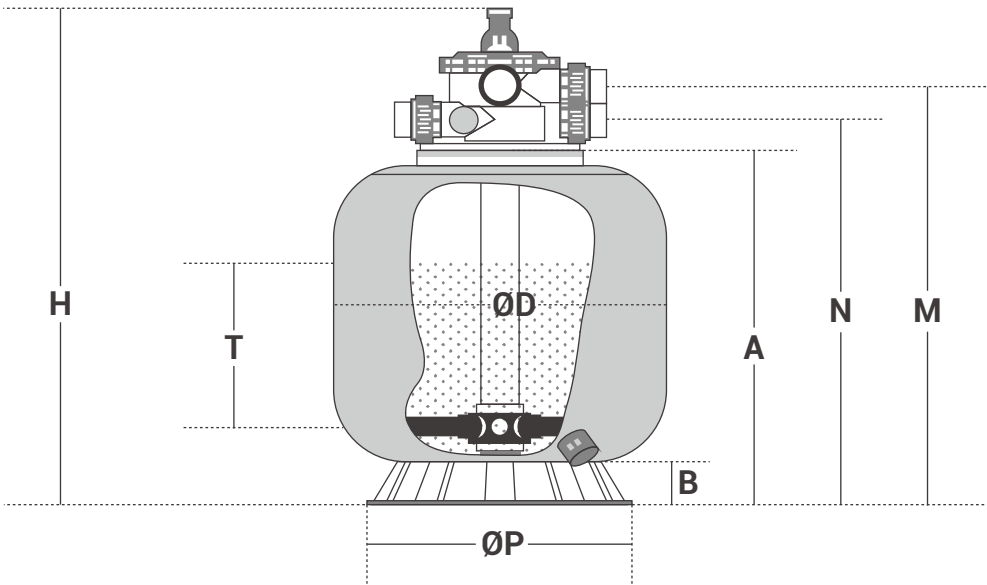

FibroPool® MEA

WWW.FIBROPOOL.COM



WWW.FIBROPOOL.AE



Designed and engineered in the USA

We reserve the right to change all or part of the features of the articles or contents of this document, with out prior notice.