



BENEFITS:

- ▶ **PU-Foamed** for maximum strength and noise deadening (**USP**)
- ✓ Integrated Earthing for user safety
- ✓ Low water consumption 4LPF
- ✓ Compatible with Frame Systems
- ✓ Certified to EN 33 and EN 997
- ▶ Made in Spain by PORTINOX

SOLD SEPARATELY:

- DM-OVC-BLACK** | SAN00035
- DM-OVC-WHITE** | SAN00045
- DM-OVC-WOOD** | SAN00032
- DM-OVC-SEAT** | SON00008
- LG-OVC-SEAT** | X0319930

CLASSIC LINE – DISABLED WALL HUNG WC PAN

INS-700-OVC | SWN00118

Fully shrouded wall-mounted toilet featuring elegant, clean lines. Specially designed for people with disabilities (PWD) or reduced mobility (PRM) for high-traffic public bathrooms where safety, hygiene, and water-saving are paramount. Made from high-quality stainless steel AISI 304, with a 1.5 / 3.0mm thickness and brushed finish ensuring long-lasting durability of its surface. Seamless welded construction with rounded edges to improve safety. Splash-proof, elongated toilet bowl, crafted from a single pressed piece for easy maintenance and superior hygiene. Equipped with a concealed perimetral flushing rim for easy cleaning. Compatible with all certified standard frame systems and direct flush valves available in the market.

- **Filled with expanded PU-Foam** for acoustic insulation and added strength.
- **Optional Toilet Seat:** Supplied with 2 seat holes sealed by security TORX screws, enabling the seat installation without uninstalling the WC pan.
- **Water connections:** Back Water Inlet of Ø55mm with integrated **Venturi System** for efficient water distribution. P-Trap of Ø100mm equipped with an installation-friendly rounded outlet **Head Connector**.
- **Water-saving:** Requires only 4L while delivering stable and powerful flush.
- **Integrated Earthing** ensuring user safety.
- **Front Installation:** Quick and easy by a **3mm sturdy** mounting plate with versatile fixing points at **180/230mm**, fixed by 6 lateral TORX security screws.
- **Robust** construction, engineered to withstand loads of up to 405 kg.
- **CE marked.** Complies to **EN 33 and EN 997** for minimum 4L flush.
- **Dimensions:** 700 x 360 x 360mm | **Gross Weight:** 17 kg

ALTERNATIVE ITEMS:




INS-700-OVC-M12 | SPW00044

Disabled wall-hung Prison Toilet for Cross-Wall mounting



INS-535-OVC-MED | SWN00118 + **MED Line**


Gloss White Teflon Coated Wall-Hung Toilet



INS-535-OVC | SWN00118

Wall-hung Toilet, brushed surface finish






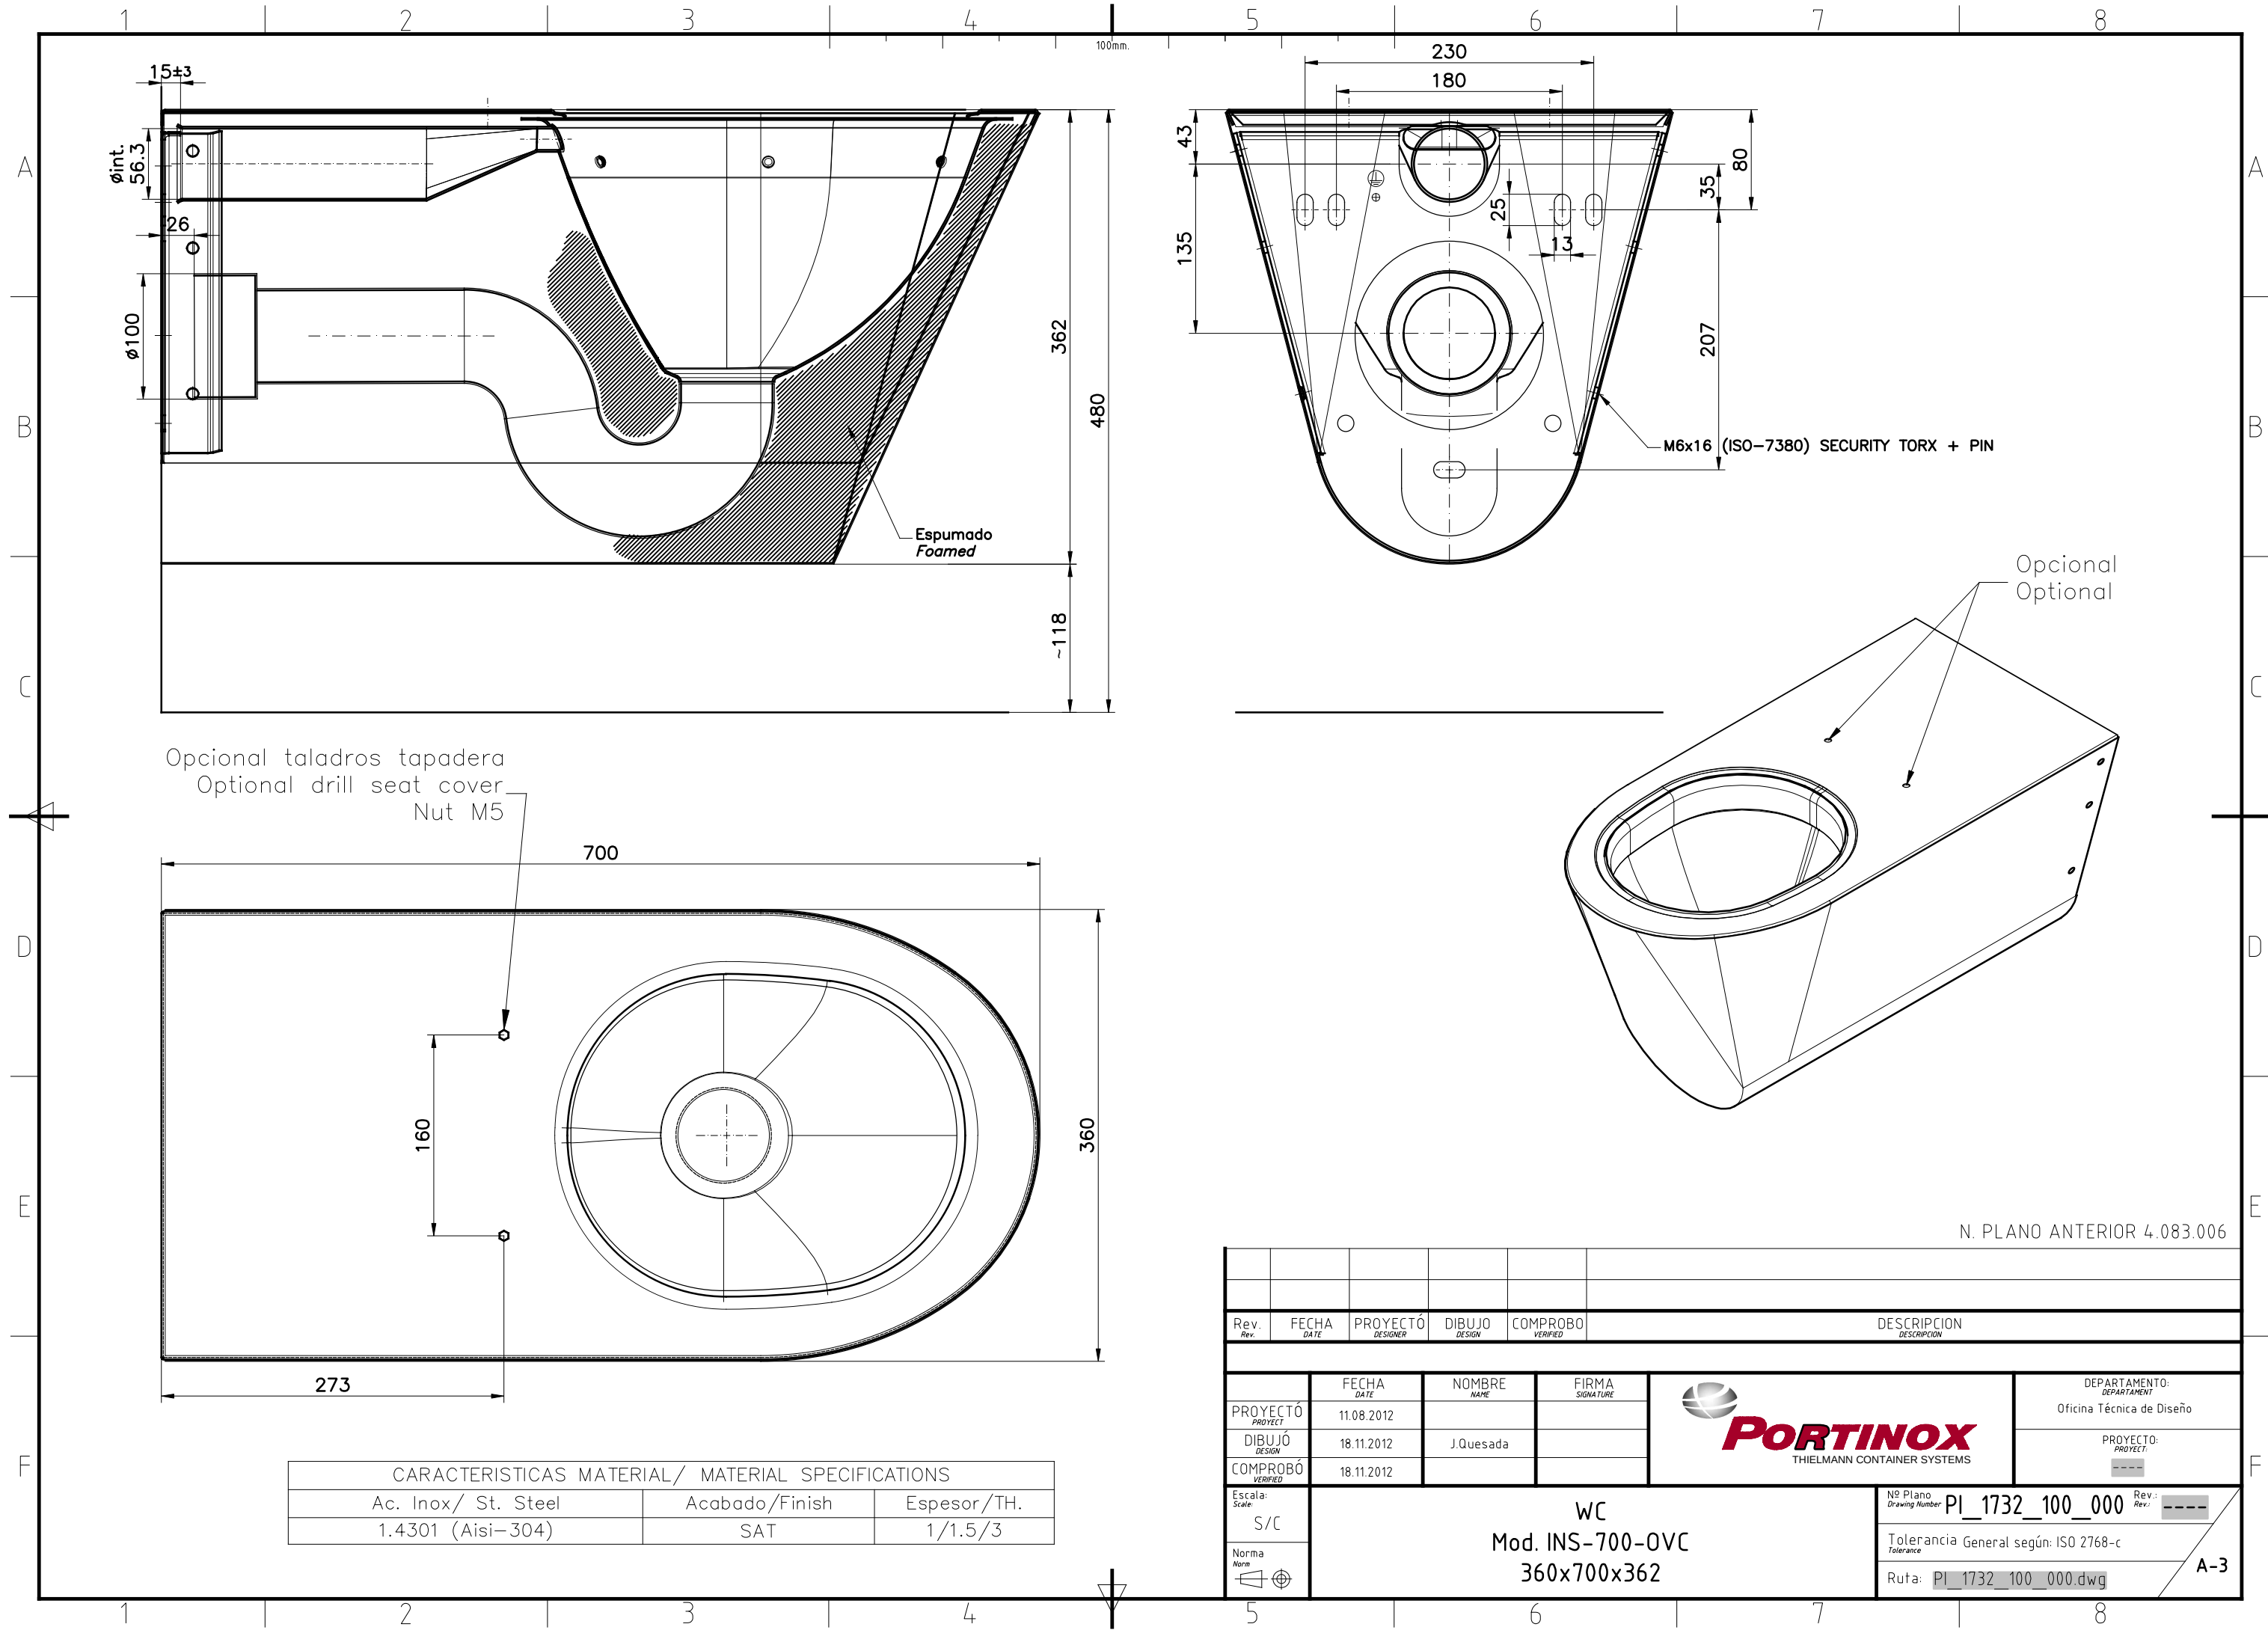

MONTAGE ANWEISUNG (DE)
MOUNTING INSTRUCTIONS (EN)
INSTRUCCIONES DE MONTAJE (ES)
INSTRUCTIONS POUR
L'INSTALLATION (FR)
MONTERINGSANVISNING (NO)
MONTERINGSANVISNING (SV)
KÄYTTÖOHJE (FI)
MONTERINGSVEJLEDNING (DA)



PORTINOX
THIELMANN CONTAINER SYSTEMS

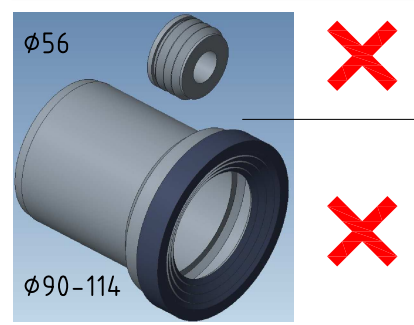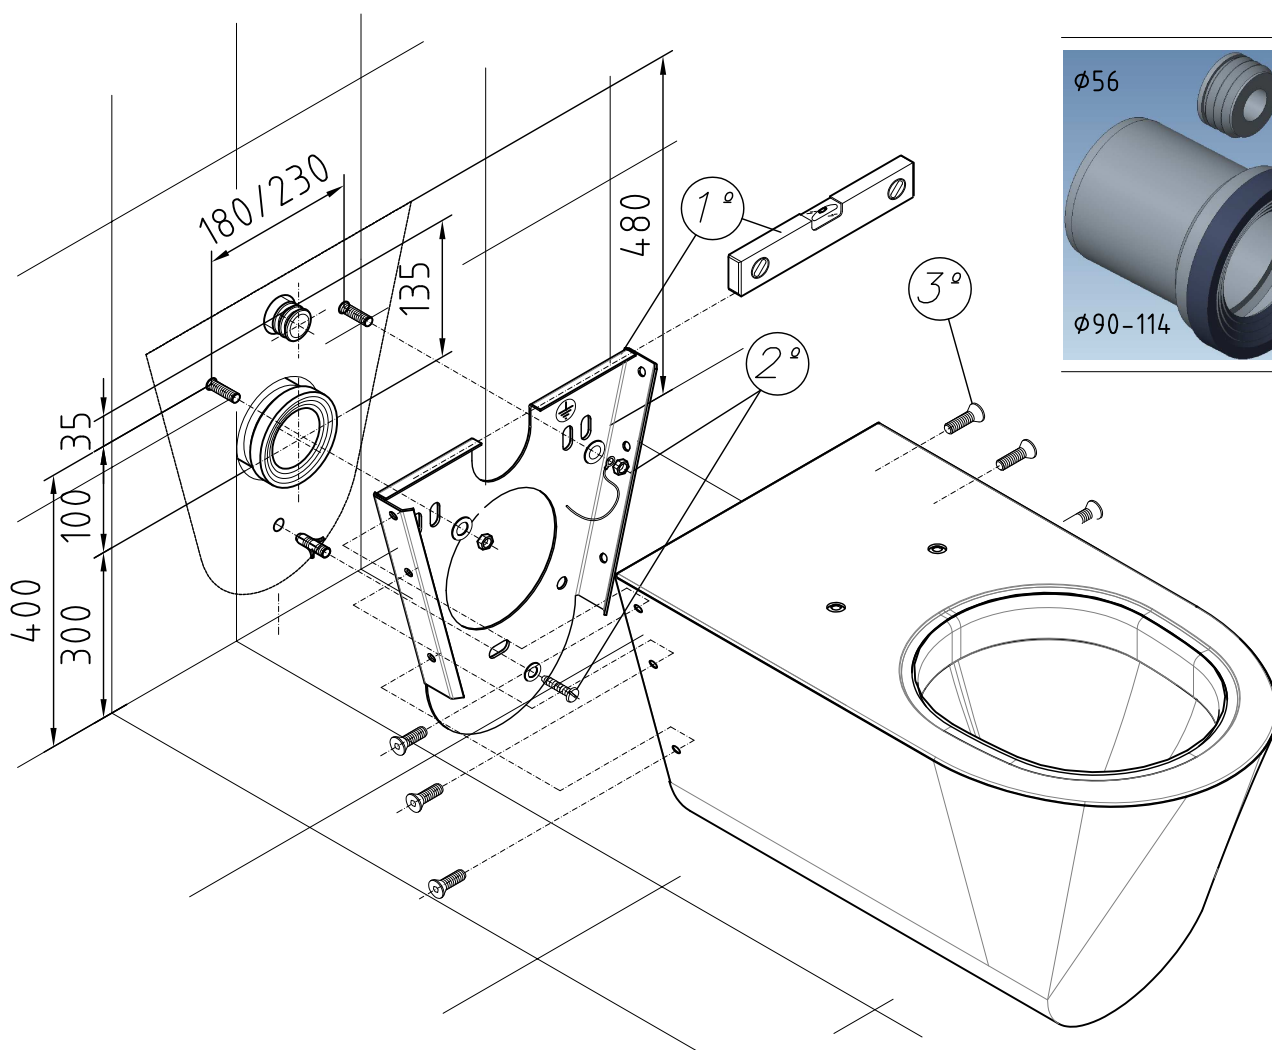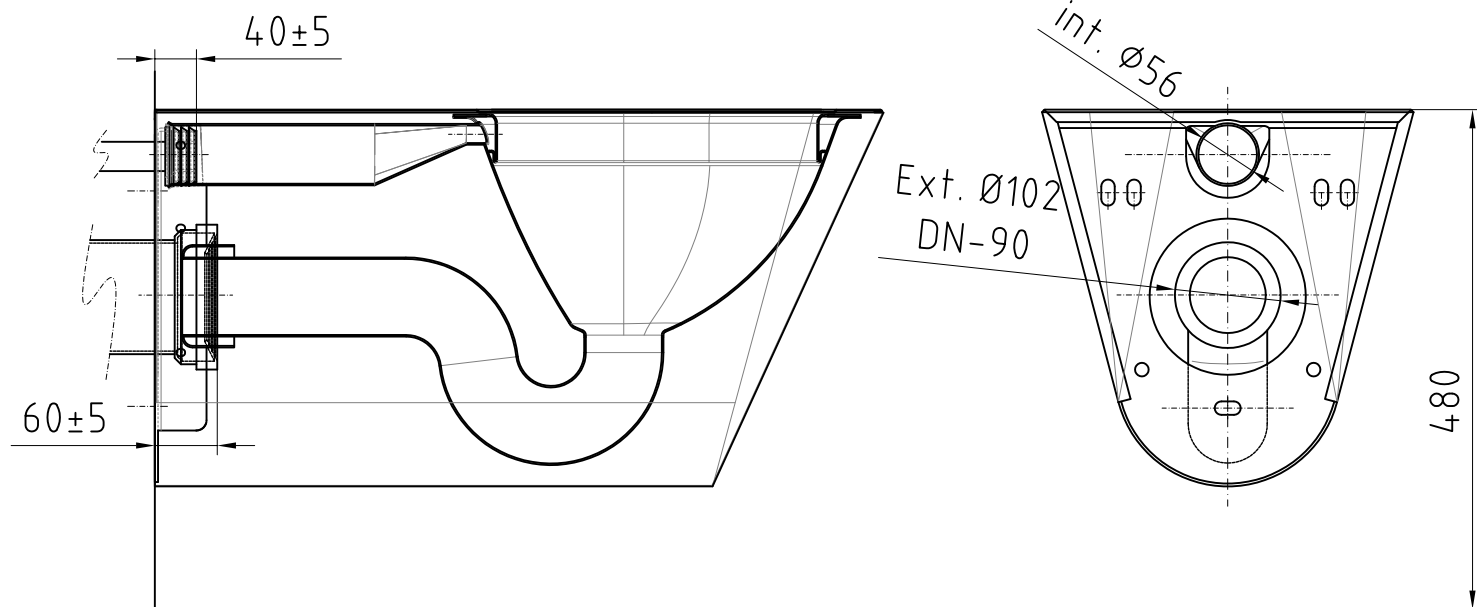

Mod.: INS-700-OVC

PI_1732_124_000