

IRONHORSE

Flex, Flex 2 & Essence

2026-06-01



daryl@rufdiamond.com

705-280-8285

Model Overview

JÄRANHÄSTEN flex



A development of the traditional IronHorse with heavy duty tracks and movable accessory bracket for better manoeuvrability. The bracket can also be used together with our timber grapple, tipper body or any other desired hydraulic tool. The hydraulic system can be offered as a standard but can also be delivered without. The IronHorse Flex would be the first choice for the forestry worker and the arborist.

JÄRANHÄSTEN flex 2



Several new improvements have been implemented in the new Flex 2 for you with higher demands on **flexibility, simplicity, serviceability**. Now with radio-controlled, hydraulic winch for easier winching in rough terrain. The front guard is designed for easy opening, providing enhanced storage options and improved access for maintenance. With Flex 2, you benefit from an efficient and user-friendly machine that keeps you productive in any environment.

JÄRANHÄSTEN essence



The top model in the range. A radio controlled and hydrostatically driven machine with powerful work hydraulics suitable for a wide range of different applications. The movable platform can be hydraulically adjusted while driving for the best centre of gravity delivering exceptional performance on off-road terrains and when handling diverse loads. This model offers extensive accessory options and compatibility with all-around attachment options, making it ideal for contractors, Fire & Rescue teams, arborists, and geotechnical engineers.

Table of Content

IH FLEX	4
FLEX BASIC	4
FLEX FOREST	4
IH FLEX2.....	5
IH ESSENCE	6
IH ESSENCE ACCESSORIES	7
ESSENCE ACCESSORY OPTIONS	8
NEWS - HOOK-LIFT LXE ESSENCE AND RANGER.....	10
IH NEWS – FORESTRY WINCH FW 2300 (ESSENCE).....	11
IH NEWS – HOOK-LOADER LX300	12
IH NEWS – AVESTAVAGNEN TIMBER-TRAILER	13
AVESTAVAGNEN TIMBER-TRAILER – PLUG N’ PLAY!	14
IH ACCESSORIES.....	15
IH FIRE-FIGHTING	23
FIRE-FIGHTING HOOK-LOADER FOR IH FLEX HI AND FLEX2	24
IRON HORSE AT WORK.....	25



IRONHORSE MODELS

IH FLEX

OUR VERSATILE MULTI-TOOL AND EQUIPMENT CARRIER

FLEX BASIC

The base machine is equipped either with Honda 9 or 13 Hp. It features an upraised steering handle and a transportation position, with a maximum speed of 7 km/h and a 6.1-liter fuel tank. Standard features include a double bogie, variator, forward/reverse gear, brake, differential lock, skid bar, manual winch (10 meters) and **Heavy-Duty Tracks, Mechanical Adjustable Tool Mount – Internal-Driving**

Base Models

Part.no. 968 7461-00 IH2090 Flex I 9 hp

Weight 368 Kg

Part.no. 968 7461-15 IH2013 Flex I 13 hp

Weight 383 Kg



FLEX FOREST

The Flex Forest machine is powered by either a Honda 9 or 13 Hp engine and features an upraised steering handle with a transport position. It reaches a top speed of 7 km/h and has a 6.1-liter fuel tank. This model comes standard with a double bogie, variator, forward/reverse gear, brake, differential lock, skid bar, anchor block, and a manual winch with a 10-meter wire. Additionally, it includes a chainsaw bracket, felling bunk, loading guard, and a power winch with a 20-meter wire and a pulling force of 7000/10,000 N. Includes **Heavy Duty Tracks. Mechanical adjustable accessory tool bracket(I) or Hydraulically adjustable + double valve incl. Hydraulic kit (HI).** hydraulic flow 18 l/min and 140 Bar.

Models

Part.no. 968 7461-21 IH2090 PW Flex I 9hp

Heavy Duty Tracks

Weight 450 Kg

Part.no. 968 7461-23 IH2090 PW Flex HI 9hp

Heavy Duty Tracks and Hydraulic

Weight 480 Kg



***All above machines can be equipped with 13 Hp**

IRONHORSE MODELS

IH FLEX2



***Available in 13hp as option**

The Flex 2 model is equipped with a range of advanced features, including:

- R/C hydraulic winch with automatic reengagement free-spool clutch for seamless winching operations
- Increased counterweight for enhanced balance
- Side-Mounted Belt Tensioning for easier maintenance
- Easy-to-open front guard providing improved access for storage and maintenance tasks
- Optimized torque converter
- Steel sprockets ensuring durability and reliability
- 9- or 13hp Honda engine options with 10A battery charging coil
- Bigger storage box with lid
- Throttle- and brake cables with oil-ports
- 20Ah battery and main switch
- Hinged skid plate for improved underbody protection
- Front and rear LED-lights (optional)

Several innovative solutions have been integrated into the Flex2 model to meet the highest demands for flexibility, simplicity, and serviceability. It's also compatible with timber trailers from Avestavagnen using an optional Robson Drive add-on kit.

Specs

The Flex Forest machine is powered by either a Honda 9 or 13 Hp engine and features an upraised steering handle with a transport position. It reaches a top speed of 7 km/h and has a 6.1-liter fuel tank. It is equipped with double bogie and steel sprockets, as well as Internal drive topped off with Heavy Duty tracks, variator, forward/reverse gear, brake, differential lock, hinged skid plate, anchor block, large storage box, chainsaw bracket, tension strap, **Radio-controlled hydraulic winch. NOTE automatic re-engagement free-spool clutch! Included is also the anchor winch!** With load protection, felling bunk with extension bars and and mount for a 50 mm tow ball (tow ball not included), 20m winch rope and a pulling capacity of 900 Kg. Hook and snatch block mounted on the winch rope and hydraulically movable accessory bracket with double valve and hydraulic flow 21 l/min and 160 Bar.

VARIANTS

Art. Nr. 968 7462-20 IronHorse Flex 2 electrical start 9 Hp

Vikt 525 Kg

Art. Nr. 968 7462-30 IronHorse Flex 2 electrical start 13 Hp

Vikt 535 Kg

Options

Art. Nr. 531 0149-85 Front- and rear LED-lights

IRONHORSE MODELS

IH ESSENCE

Our version of the Swiss army knife!

Part.no. 968 7465-01 IronHorse Essence 25 hp

Since its inception, the IronHorse has been utilized in a wide range of applications. With the new Essence platform, we elevate its functionality even further. The IronHorse Essence serves as a versatile base model, offering a comprehensive selection of accessories that enable users to perform a variety of tasks swiftly and efficiently.

- Remote-Controlled Operations with a radio-controlled system and hydrostatic drive for maximum convenience and precision.
- High Hydraulic Capacity supporting diverse applications and attachments.
- Mobile Tool Carrier with a movable center of gravity, ensuring exceptional terrain adaptability.
- Extensive Accessory Range designed for different segments, with the flexibility to adapt custom-made equipment.

OTHER Options:

LED-work lights

Rotating warning light

SPECS:

Engine:	Honda iGX800, 25 hp (18,6kW)
Transmission:	Hydraulic, variable (hydrostatic)
Tracks:	Internal drive – Heavy Duty.
Hydraulic:	14,4 cm ³ , 45 l/min, and 180 Bar
Weight:	700 kg
Payload:	1000 kg
Traction:	1100 kp
Steering:	Remote by radio
Dimensions:	194 x 114 x 117 cm (L x W x H)

JÄRNHÄSTEN essence



IH ESSENCE ACCESSORIES

IH ESSENCE ACCESSORIES

THE ACCESSORIES COMPLETE THE CONCEPT

The IronHorse Essence delivers unmatched versatility and productivity, tailored to meet the needs of professionals. Make your choice from the product range of Lennartsfors AB or by any other manufacturer in the industry to best accommodate your needs. Here follows some examples:



Snow plough



Hammer shredder



Earth drill



Different platforms



Arborist grapple



Pallet forks

IH ESSENCE ACCESSORIES

ESSENCE ACCESSORY OPTIONS



Hydraulic R/C Winch HRW500 Part.no. 531 0146-22

RC Hydraulic winch HV500 is a reliable and proven construction. The winch kit is complete with a radio-controlled box, wire, hook, hoses, and electrical controlled hydraulic valve.

Weight:	30 Kg
Line speed:	30 m/min
Pressure:	190 Bar
Max line pull:	500 Kg
Cable:	25m, 6 mm
R/C:	2 channel
Range R/C:	Approx 50 m



Hydraulic hitch TF700 Part.no. 531 0146-69

Equipped with Avant/Multi One quick release bracket, float position and third function as standard

Weight:	25 Kg
Max lifting capacity:	700 Kg



Removable Towing Ball Part.no. 5310 148-27

Fits the IronHorse Essence



Arborist timber grapple for hydraulic hitch AG300 Part.no. 531 0147-45

Weight:	110 Kg
Max lifting capacity:	500 Kg

Requires Hydraulic hitch TF700 (Part.no. 531 0146-69)

IH ESSENCE ACCESSORIES



Dumper Body DF800

Part.no. 531 0147-38

Complete med 2pcs hydraulic cylinders

Weight: 200 Kg
Max loading capacity: 800 Kg/0,5 kbm



**Snow Blade / Snow Plow
SBW183**

Part. Nr. 531 0147-71-1

**Mechanical Turn
Hydraulic Turn**

Part. Nr. 531 0147-71

Mount type: Avant/MultiOne

Width: 1830 mm

– **Requires Hydraulic hitch TF700 (Part.no. 531 0146-69)**



**Pallet Fork Attachments
Essence**

Part.no. 5310 158-02

Fits the IronHorse Essence

Requires Hydraulic hitch TF700 (Part.no. 531 0146-69)

IH ESSENCE ACCESSORIES

NEWS - HOOK-LIFT LXE ESSENCE

The LXE is an integrated system designed to maximize versatility, adaptability and efficiency. It consists of a load changer arm mounted on the IronHorse Essence chassis and is hydraulically operated via remote controller.

Please note that it is only possible to add this to new Essence machines.

Key features include:

- **Multiple Configuration Options:** With one or more hook-loading frames, users can switch between different frames or tools within seconds.
- **Compatibility with Pre-Developed Accessories:** The loading frames can be supplied as a basic version for custom applications or integrated with pre-developed accessories, such as the Moose platform.
- **Quick Change Capability:** The LXE system allows for seamless changes between different applications without the need for assembly tools.
- **Flexible Mounting:** It is designed to be mounted on the IronHorse Essence.

Part.nr 5310 157-99

Hook-Lift LXE

Enables you to swiftly and with change accessory and load on your IronHorse Essence

Part.nr 5310 158-00


Hook-Lift Cargo Platform/Frame LXE

Galvanized tool platform (hose-platform) equipped with a loading guard suitable to Hook-Lift 5310 157-99.

Part.nr 5310 150-56


Hook-Lift Frame for Portable Pump Essence

Frame for motorized fire-fighting-sprayer class 2, suitable to Hook-Lift 5310 157-99.

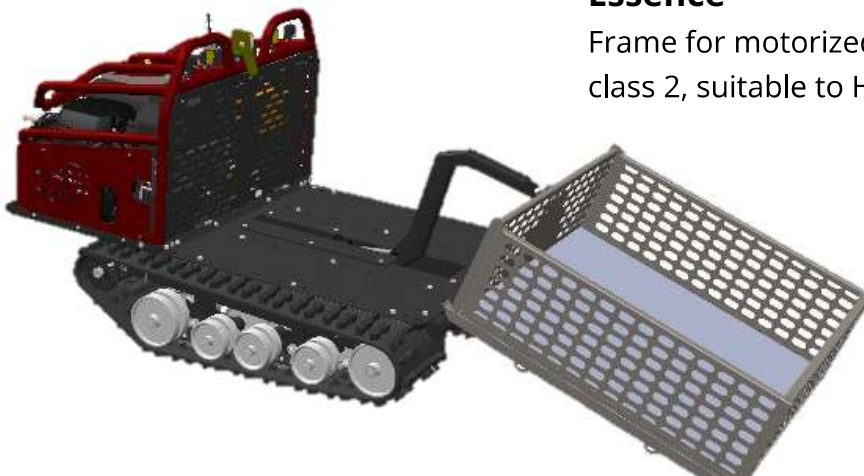



IH NEWS – FORESTRY WINCH FW 2300 (ESSENCE)



EQUIPPED FOR FORESTRY WORK

The IronHorse Essence – Skidder Edition is an exceptionally versatile machine designed specifically for skidding and forestry tasks. It is equipped with a skidding winch and a tilting butt plate, available in two versions:

- **Part No: 5310156-83-1** - Only Buttplate and ground anchor (intended for users who only want to use the “regular” option of hydraulic winch 5310146-22 to increase stability.
- **Part No: 5310156-83** - Complete Forestry High-Power Winch (FW2300), with buttplate and High-Power Winch – Delivers increased torque and longer wire length for more demanding tasks.
- **Part No: 67318-58** – Felling Bunk for Forestry Winch

NEWS!

Advanced Features for Optimal Performance

- *Radio-Controlled Operations*


All functions, including driving and winching, are controlled remotely, ensuring safe and convenient handling.

- *Adjustable Chassis*

For maximum traction control, the center of gravity can be adjusted during operation, enhancing stability on challenging terrains.

- *Forestry Winch Versatility*

Choose between the integrated winch or the powerful forestry winch with a tilting butt plate, depending on the complexity of the skidding task.

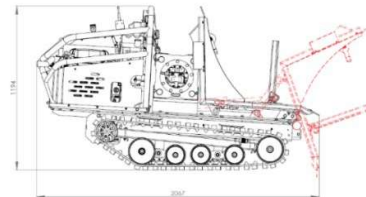

Parameter	Data
Weight:	ca. 950 kg
Winch(add-on)	2 300 kg torque, 10 mm, 50m
Loading capacity	1 100 kg
Speed	30 m/min
Traction torque	900 kg
Engine	Honda iGX800 25 hp, 18,6 kW. Elect. starter
Transmission	Hydrostatic, High/low
Auxiliary hydraulics	14 cc, 45 l/min, 180 bar
Electric system	12V, 18A coil, Battery 30 Ah
Tracks	Rubber
Winch (standard)	900 kg torque, 6 mm, 20m

IRONHORSE NEWS

IH NEWS – HOOK-LOADER LX300

The LX300 is an integrated system designed to maximize versatility and efficiency. It consists of a load changer arm mounted on the IronHorse Flex chassis and is connected to the hydraulic movable tooling mount.

Key features include:

- **Multiple Configuration Options:** With one or more hook-loading frames, users can switch between different frames or tools within seconds.
- **Compatibility with Pre-Developed Accessories:** The loading frames can be supplied as a basic version for custom applications or integrated with pre-developed accessories, such as the Moose platform.
- **Quick Change Capability:** The LX300 system allows for seamless changes between different applications without the need for assembly tools.
- **Flexible Mounting:** It is designed to be mounted on the IronHorse Flex HI or the new Flex 2, utilizing the existing piston used for the tool mount to enable the load-changing movement.

The Hook-Lift LX300 delivers unmatched operational efficiency and adaptability, making it an essential accessory for contractors and forestry professionals.



Part.nr 5310 157-04

Hook-Lift Platform/Frame LX300

Galvanized tool platform (hose-platform) equipped with a loading guard suitable to Hook-Lift 5310 156-11.



Part.nr 5310 156-11

Hook-Lift Flex incl. tow bar LVRM2

Enables you to swiftly and with change accessory and load on your IronHorse Flex HI



Part.nr 5310 157-56

Hook-Lift Frame for motorized fire-fighting-sprayer LVF01

Frame for motorized fire-fighting-sprayer class 2, suitable to Hook-Lift 5310 156-11.



IH NEWS – AVESTAVAGNEN TIMBER-TRAILER

ENJOY MORE **FLEXIBILITY!**

Turn your IronHorse into an efficient forwarder with the Avequs Trailer from Avestavagnen. Choose either between the Forrester Aveques Pro, which has been specially customized to work with the IronHorse, or their Avequs Light 3.4. Read more about their specifications below.

Important Note!

It is also possible to equip your existing Flex2 with a Avequs trailer from Avestavagnen. Just add our add-kit for timber trailers with Robson Drive. This kit consists of a control panel that is mounted on the handlebar and an electrical connection in order to operate the Robson Drive on your Timber trailer.

Also, please be aware that the IronHorse Essence must be programmed before it can be fitted to a Timber Trailer. This needs to be performed by our engineers in Lennartsfors.

With the new add-on kit you can even post-purchase equip your I.H. Flex2 with a Timber-Trailer from Avestavagnen



Avestavagnen Timber Trailers

RufDiamond offers Avestavagnen timber-trailer solutions for the Iron Horse Flex 2. See the following page for configuration details and available accessories.

Canadian sales: daryl@rufdiamond.com | 705-280-8285



daryl@rufdiamond.com

705-280-8285

IRONHORSE NEWS

AVESTAVAGNEN TIMBER-TRAILER – PLUG N' PLAY!



Art. No. 531 0156-76

Kit for the Iron Horse Flex 2 for Timber-Trailer with Robson Drive from Avestavagnen Avequs Pro. The kit consists of a control panel that is mounted on the control lever and electrical coupling. Fits Avestavagnen Avequs Pro



AVESTAVAGNEN

Forester Avequs Pro Flex 2 (Multi-stick)

Custom made to fit directly on the IH Flex 2 with our add-on kit. It fits also on the IH Essence. No need for any adjustments if you have our **add-on kit** for timber grapple trailer with Robson Drive on your IH Flex2. IH Essence **must** be programmed before it can operate a timber grapple trailer with Robson Drive.

Included in the Forrester Avequs Pro Timber Trailer

- Avequs chassis
- Valve package 6.2 multistick
- Lever holder
- 4,2 m crane with extension.
- AVG08 grapple.
- Adjustable support legs.
- Lamp kit on the crane.
- Radio controlled hydraulic winch.
- Robson drive on the trailer.
- Valve package for Robson drive on the trailer.
- Snatch blocks.
- Specially made drawbar to increase balance on the Iron Horse.

NOTE! Work lights is optional.

Examples of add-on accessories:

- 2-Lever- Coordinate Valve package with 2 mechanical joysticks for the first 4 functions
- 2-Lever electric on / off buttons at thumb that control grip and extension, only at extension

More accessories: www.avestavagnen.se

Canadian sales: daryl@rufdiamond.com | 705-280-8285



IH ACCESSORIES

IH ACCESSORIES

NEWS!



Hydraulic Pole-Puller

Part.no. 531 0157-87

These hydraulic pole-pullers help you remove old poles, fences driven into the ground.

Length:	425 mm
Width:	525 mm
Height:	705 mm
Power (pressure):	Ca. 5000 kg
Weight:	38 Kg



Plantation Platform Sundin

Part.no. 5310 157-79


Developed specifically for planting seedlings, this platform provides a stable and efficient workspace for reforestation and planting operations.

Weight:	80 Kg
Length inside:	1220 mm
Width inside:	1115 mm
Height inside:	600 mm
	(1004 mm incl. extension)
Length outside:	1370 mm
Width outside:	1185 mm
Height outside:	630 mm
	(1035 mm incl. extension)

Fence dispensing tool

Part.no. 531 0142-25

Wire dispensing tool for unrolling fencing wire during fence installation. Requires felling bunk (531 0135-24).





IH ACCESSORIES



Timber Cart Combi TK1000 Part.no. 531 0198-47

The trailer is suspended pivotally on the IronHorse and is extensible. All stakes are collapsible and boggie. Can also be equipped with Platform (5310135-40).

Width totally:	1210 mm
Width between the Felling bunk:	785 mm
Extension of trailer min/max:	1,8–3,8 m
Weight:	155 Kg
Wheel:	16 x 6,5–8"
Loading capacity:	1000 Kg



Platform for the Timber Part.no. 531 0135-40 Cart IFTK1000

The platform is delivered complete with fastening brackets. Sides and tailgate are foldable. The platform is made for the Timber Cart Combi (531 01 98-47)

Height (side and tailgate):	30 cm
Width:	120 cm
Weight:	120 Kg
Loading capacity:	600 Kg
Length:	200 cm



Self-unloading Timber Part.no. 501 4002-00 Cart STK800

Unique terrain-characteristics. Easy to disassemble during transport. The Cart can be extended or shortened. Standing position when empty

Length:	119 cm – 267 cm
Width between the Felling bunk:	92,5 cm
Width totally:	140 cm
Weight:	140 Kg
Loading capacity:	800 Kg



Snatch block STK800 Part No. 531 0196-08

The snatch block is open with a swivel hook. Extremely useful in combination with the power winch, both for changing direction of pull and for winching the IronHorse forward.



IH ACCESSORIES

Platform for forest plants PF900 Part.no. 531 0144-54



Length:	1197 mm
Width:	1080 mm
Height:	750 mm
Weight:	75 Kg

Loading Plate Classic LP420 Part No. 531 0135-15

Loading Plate Flex I-model LP420 F Part No. 531 0144-08



Kit consisting of mounting brackets and plate. This kit makes it easy to load logs using the winch as the log's slides onto the machine.

Foldable in a way that it can be in horizontal position when going without any load on the machine. The loading plate is also a support to the ground and work as a brake, so the machine doesn't move backwards. The loading plate is easy to mount on existing machine.

Dimension:	420 x 935 mm
Weight:	25 kg

Loading Plate Flex HI-model LP740 F Part No. 531 0142-87

Loading Plate Essence-model Part No. 531 0155-94 (Essence Plate not pictured)



Consisting of mounting brackets and plate easy to attach onto the fellingbunk. This kit makes it easy to load logs using the winch as the logs slides onto the machine. Foldable in a way that it can be in horizontal position when going without any load on the machine. The perfect combination together with the Hydraulic kit easily using the piston sliding on the logs.

Dimension:	780 x 740 mm
Weight:	21 kg

Skidding Cart LV02

Part.no. 531 0198-35



Perfect tool to attach behind The IronHorse without leaving a scratch on the ground. Easy way to transport out the logs. Need Power winch to operate the skidder.

Weight:	38 Kg
---------	-------



IH ACCESSORIES



Loading crane LK500

Part No. 501 3999-01

The loader can be fitted to each IronHorse with power winch. The loader is complete with bracket to the power winch, adjustable loading arm, chains and roller.

Length loading arm (min/max):	850-1150 mm
Weight:	50 Kg



Timber Grapple TG260

Part.no. 531 0143-20

The grapple fits the IronHorse Flex with hydraulic kit. The grapple makes it quicker and easier to move bigger logs or brushes. Includes grip, piston, bar and attachment for Flex HI



Felling bunk with tow ball

Part.no. 531 0135-24

Classic, Flex och Essence TB1000

The Felling bunk have folding bars as are possible to lock in two positions, as make it easy to load and unload big logs. The Felling bunk have ring on each side to fasten the strap and a felling function to unload the log.

Loading gap:	800 mm
Loading height:	300 mm
Loading capacity:	1000 Kg



Extension bar 1 pcs (red) FS300R

Part.no. 501 3994-01

Extension bar 1 pcs (black) FS300S

Part.no. 501 3994-01-B

The extension bar can be used to extend the Felling bunk and increase the loading capacity. It can also be used to facilitate the loading both manual and with the winch. The extension bars also have attachment lug to attach the snatch block as can be used for winching

Length (mounted in the bar)	300 mm
Total length:	370 mm



IH ACCESSORIES



Tipper body Classic TF800

Part.no. 531 0135-31

Tipper body Flex HI TF800FH

Part.no. 531 0142-64

The tipper platform is delivered complete with fastening brackets, could be used either manual, winch or hydraulic sides and tailgate are removable. With the sides and tailgate removed, the platform is completely clean with no stakes in the corners. The front gate is not removable.

Length:	1080 mm
Width:	1070 mm
Height:	460 mm
Height sides:	290 mm
Weight:	60 Kg
Loading capacity	800 Kg



Hand winch Heavy Duty Incl. bracket HD500

Part.no. 531 0144-12

The Hand winch, include a 20m, 5mm wire, hook and bracket. 500 kg pulling force.



Detachable Working Light LED 20W Incl. bracket

Part.no. 531 0143-91

Detachable, reloading LED-light incl. attachment for the IronHorse. Use as working light, when driving in the terrain or place it in a suitable place when working in the forest.

High quality working light in aluminum, that runs by reloading battery. The Ball light can be adjusted in 2 stages 1000 lumen or 2000 lumen. When using option 2000 lumen it will operate for 3 hours and at 1000 lumen for approximately 7 hours.



IH Storage Cover SKK01

Part.no. 501 3979-02

Tailor made storage cover to protect the engine, steering lever and powerwinch when storing the IronHorse outside.

Protective cover for steering lever Part.Nr. 501 3979-07 SKSP01

Shaped protective cover for the steering lever adapted for the IronHorse Flex and Flex 2. Protects the steering lever when stored outdoors or during transport.



IH ACCESSORIES

Platform Classic LFA500 C
Platform Flex LFA500 F

Part no. 501 3984-02
Part no. 501 3984-02-2



The platform is easily mounted on the IronHorse. With the large tailgate lowered it is easy to load heavy materials from the ground with the help of the winch.

Length:	1180 mm
Width:	1020 mm
Height tailgate:	500 mm
Height sides:	290 mm
Weight:	72 Kg
Loading capacity:	500 Kg



Platform Cart KV2150 **Part.no. 531 0196-70**
Jointed platform Cart KV2150 **Part.no. 531 0196-70-1**

The Platform Cart is suspended pivotally on the IronHorse and the wheels are adjustable. When the wheels are in the low position it is ideally suited for rear loading with or without winch. The front side/ side board are fixed.

Length without wheels:	2150 mm
Width:	900 mm
Weight:	88 Kg
Length total:	2150 mm
Length w/o wheels	1730 mm
Wheel:	4,00-8"
Loading capacity	700 Kg



Loading bracket BYG01

Part.no. 531 0140-67

Bracket that makes it easier to load the wild animal onto the platform. The head of the animal will be placed further up towards the engine and by this gives a better balance while driving in the terrain.



Engine Cover MS01

Part.no. 531 0140-68

The cover protects engine and exhaust system from external obstacles and dirt.(Only 9 Hp models)



IH ACCESSORIES



Tracks for the Classic model

Part.no. 531 0000-01

Kevlar armed driving tracks, made of nature rubber and epoxy pin, casted into the rubber. The tracks have a very good tearing strength and hard-wearing. The tracks are special made for the IronHorse



Heavy Duty tracks for the Flex models and Essence

Part.no. 531 0141-40

The track used on the Flex Iron Horse has a significantly longer life-span and provide considerably better traction on ground and snow surface.



Spikes for the Classic tracks

Part.no. 531 0135-17

Spikes for the Heavy Duty tracks

Part. No. 5310143-60

Mounting kit for the Driving tracks include 24 pieces for 2 Driving tracks, 12 spikes in each tracks. All are included in the kit, with screws, nuts and washers. The spikes have a toothed surface, as give a good grip in slippery and hard ground. If you need 1 Spike, as spare, please refer to part no. 531 01 41-84



Power winch IH 9 Hk & 13 Hk

Part.no. 501 3998-05

Power winch IH 9 Hk & 13 Hk*

Part.no. 531 0139-49

The Power winch to the IronHorse include, a complete kit with 20 m. wire, corner block, pulley, belt, bar, and cover for the transmission.

*For machines with intermediate drive shaft

Pulling force	700-1000 kp
Cable	20m, 6mm
Weight	70kg

Removable storage box FVL82

Part. No. 531 0155-31



This storage box can be used for tools, petrol cans, clothes or whatever necessary. It is attached to the machine with hooks over the load protection and anchors to the machine with a simple snap fastener. Once in the forest, the box can be unhinged to make use of the entire loading space. It's efficient and tall design makes it also possible to drive with both load and box.

Length	75 cm
Width	21 cm
Back height	52 cm
Front height	42 cm
Weight	9 Kg



IH ACCESSORIES



**Load Guard incl. left-/right bar
LS700**

Part No. 531 0135-54-1

**Machine with intermediate drive
shaft LS700M**

Part No. 531 0135-54

Roller for Load Guard

Part No. 501 4009-01



**Hydraulic kit 6,0 cm³
Classic and Flex H**

Part.no. 531 0137-03

With this Hydraulic kit you can use a wide variety of equipment and tools together with your IronHorse.
The Hydraulic kit can only be assembled on the 9 & 13 Hp version of the IronHorse.

Flow: 18 l/min.
Pressure: 140 bar



**Frame for EUR-pallet Classic
Frame for EUR-pallet Flex**

Part.no. 531 0141-33

Part.no. 531 0143-35

Smart accessories for loading a EUR pallet on the IronHorse. Adapted for loading and unloading with pallet forks. The pallet is completely level despite the IronHorse chassis leans back slightly.

SERVICE KIT for your IronHorse

Part.no. 531 0144-30 (2017- 2018), part.no. 531 0144-30-1 from 2019 -
IH2090PW/IH2013PW Variator/drive belt, winch belt, spark plug, throttle, and brake wire

Service kit IH2090/IH2013 without Power winch (winch belt excluded)
Part.no. 531 0144-31 (2017 - 2018), part.no. 531 0144-31-1 from 2019 -

Part. No. 531 0144-30-2 Service Kit Intermediate Drive Shaft
Variator/drive belt, winch belt, spark plug, throttle and brake wire, toothed belt

Servicekit Flex 2 (9 Hk) Part. Nr. 531 0144-30-3
Variator/drive belt, spark plug, throttle and brake wire, Air filter and return filter


Servicekit Essence Part. Nr. 531 0148-44
Spark plug, oil filter, air filter, fuel filter, Spin-on filter






IH FIRE-FIGHTING

IH FIRE-FIGHTING

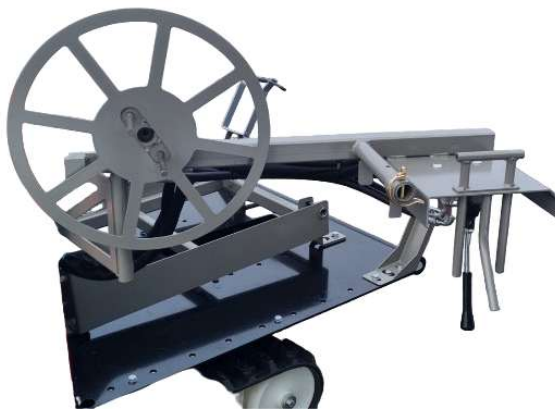

Hydraulic fire hose reel HS Part. 531 0148-98

Hydraulic hose reel that enables you to easily reel in your fire hoses. Fits IronHorses with hydraulic kit

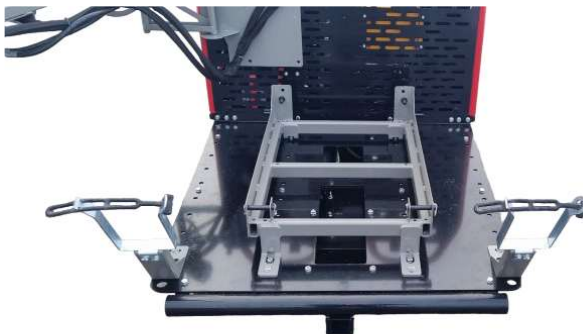

Frame for motor fire-fighting sprayer RM Part. 531 0156-14

Frame for motor fire-fighting sprayer for fixed installations. Fits IronHorse Flex and Essence



IH FIRE-FIGHTING

FIRE-FIGHTING HOOK-LOADER FOR IH FLEX HI AND FLEX2

On the initiative of Boxholms Skogar, a collaboration was started with the Rescue Services in Boxholm and Mjölby and Lennartsfors AB on the use of the Iron Horse when fighting forest fires.

The result of the collaboration was, among other things, the development of a new accessory that allows the IronHorse to switch very quickly between different platforms and applications and thus be able to use a common base machine to drive out e.g. water pumps and hose packages to hard-to-reach forest areas and at other times use the machine for completely different tasks.


This new accessory, called "Hook-Lift LX300", consists of several parts and is mounted on the IronHorse Flex HI or the new Flex 2. The existing piston is used to create the actual load change movement.



Part.nr 5310 156-11

Hook-Lift Flex incl. tow bar LX300

Enables you to swiftly and with change accessory and load on your IronHorse Flex HI

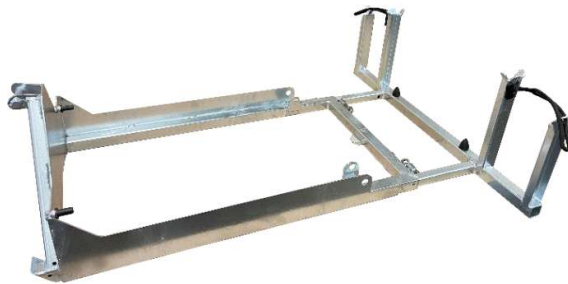

Part.nr 5310 157-56

Hook-Lift Frame for motorized fire-fighting-sprayer LVRM2

Frame for motorized fire-fighting-sprayer class 2, suitable to Hook-Lift 5310 156-11.



Part.nr 5310 157-04

Hook-Lift Plattform LVF01

Galvanized tool platform (hose-platform) equipped with a loading guard suitable to Hook-Lift 5310 156-11.



IH INSPIRATION

IRON HORSE AT WORK

JÄRANHÄSTEN





IH INSPIRATION

JÄRANHÄSTEN





IH INSPIRATION

JÄRANHÄSTEN





IH INSPIRATION

JÄRANHÄSTEN

