# B\_

## Twilight

Twilight stands out from the rest as an innovative heterogeneous comfort vinyl. Ideal for the eco-conscious, it carries a 40% reduced carbon footprint and is made with phthalate-free PVC, entirely sourced from bio-circular renewable resources. Twilight offers effective acoustic reduction and durability, ideal for stores, offices and homes. As the first eco-friendly vinyl of this kind in South Africa, Twilight features advanced digital printing technology with hyper-realistic visuals with no visible repeat. Available in 3 eye-catching patterns to ensure timeless design appeal that cannot be matched.

### **Extended Specifications**

Type of Installation: Heterogeneous Comfort Vinyl Sheeting

Use Classification: (EN 1307) Heavy Residential / Light Commercial

 Wear Layer Thickness:
 0.40 (mm) | 0.015 (in)

 Total Thickness: (ISO 8543)
 3.0 (mm) | 0.11 (in)

Total Weight: (ISO 8543)  $1850 (g/m^2) | 54.56 (oz/yd^2)$  Roll Size (I x w):  $24 \times 2.0 (m) | 944.88 \times 78.74 (in)$ 

Backing Type: Polymer Foam Backing

Chemical Resistance: (EN ISO 26987)

Resistant


Fire Classification: (EN 13501-1)


Slip Resistance: (DIN 51130)

Residual Indentation: (EN ISO 24343-1)

Slip Residual Indentation: (EN ISO 24343-1)

≤0.35mm

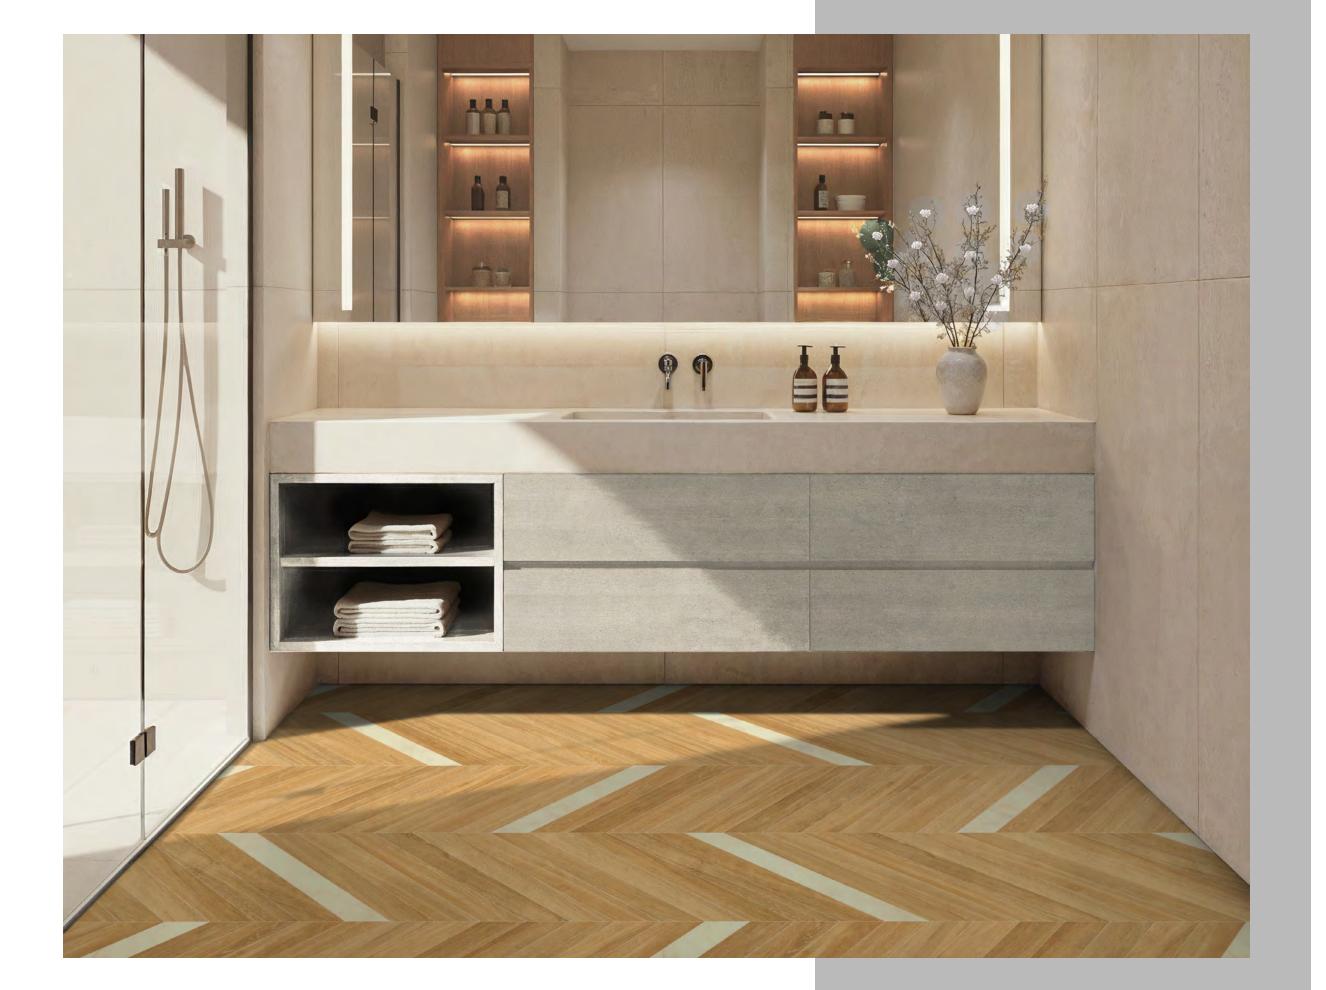



### **Extended Specifications**

Thermal Conductivity: (EN 12524)

Thermal Resistance: (ISO 8302)

**Electrostatic Propensity:** 

(Body Voltage Test) (EN 1815 Method A)

Dimensional Stability: (EN ISO 23999)

Colour Fastness: (ISO 105-B02)

Impact Sound Improvement: (EN ISO 717/2)

Castor Chair Suitability: (EN ISO 4918)

Underfloor Heating: (EN 12667)

**VOC Emissions:** 

Furniture Leg Resistance: (ISO 16581) EN424

Pendulum Test: (CENTS 15676:2007)

Cold Welding (Werner Muller):

Delamination Test: (EN ISO 24345)

Curling: (EN ISO 23999)

Abrasion Group: (EN 660-2)

Warranty:

0.11 W/ (m.K)

0.028 m<sup>2</sup>.K/W

0.2kV

≤0.40%

>6 Grade

 $\Delta$  Lw 19 dB

Suitable, (type wheel H)

Suitable

Floorscore SCS Global Services

No Damage

42+

Type A

≥50N/50mm

≤8mm

T class

10 year Heavy Residential 5 year Light Commercial





Grade Pattern repeat: 100cm x 100cm

Shade

Pattern repeat:

200cm x 100cm



Silhouette Pattern repeat: 200cm x 100cm

## Twilight



Heavy Residential




Commercial

Anti-**Bacterial** 

(**A** 



Look



Underfloor Heating



Office Chair



**Castor Wheels** 









Suitable for

Staircases













### **Bill of Quantities**

- · Belgotex TWILIGHT 3.0mm width Heavy Residential / Light Commercial Use Heterogeneous Comfort Vinyl Sheeting.
- · 24 × 2.0m with 0.40mm wear layer.
- · 10-year residential warranty / 5-year Light Commercial warranty.
- · This product is to be laid in accordance with SANS 10070 fitting code of practice.
- · Belgotex recommends the use of a 60mm unhooded soft castor, with a 23mm or 38mm diameter, designed for a 60kg loading capacity per a castor. Recommended material is high impact nylon core and hub with soft grey/black PU treads on the wheel.

Product characteristics may vary due to the nature of manufacturing. To combat colour variance do not install more than one dye lot in a single installation. Sample swatches have been cut from an overall design; therefore, the decoration and shades may vary. A difference in appearance from the pattern is likely, as the product is not intended to have a uniform appearance.

\*All product names and logos are trademarks of BELGOTEX FLOORCOVERINGS® (Pty) Ltd. © BELGOTEX FLOORCOVERINGS® (Pty) Ltd. All rights reserved. Warranty and guarantee to limitations and conditions. For details contact BELGOTEX FLOORCOVERINGS® (Pty) Ltd.