





SPAREPARTS
AUSTRALIA




GEARBOX PART BREAKDOWNS

SIMPLE
PRECISE
RELIABLE

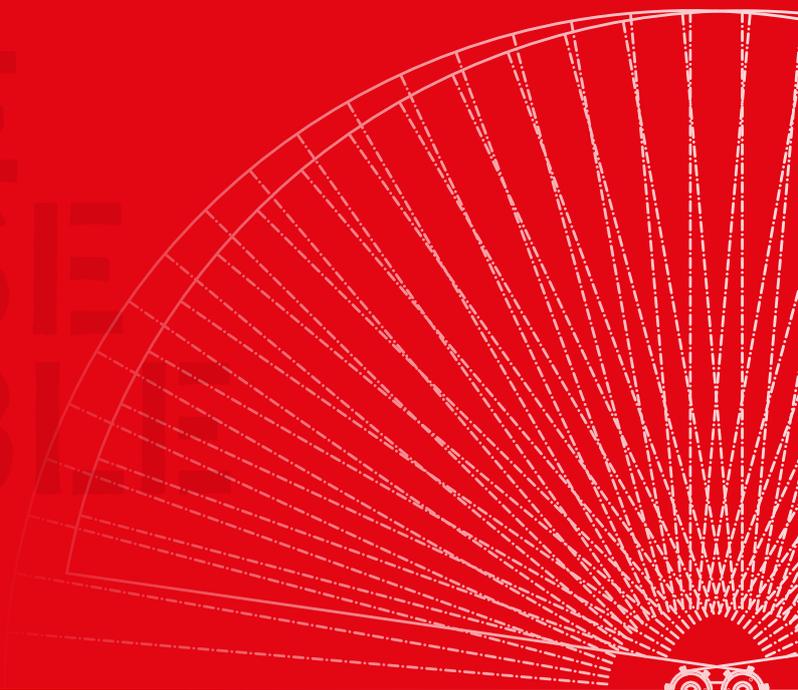

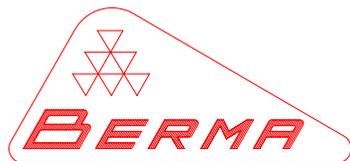

RT 300 - K65VR.

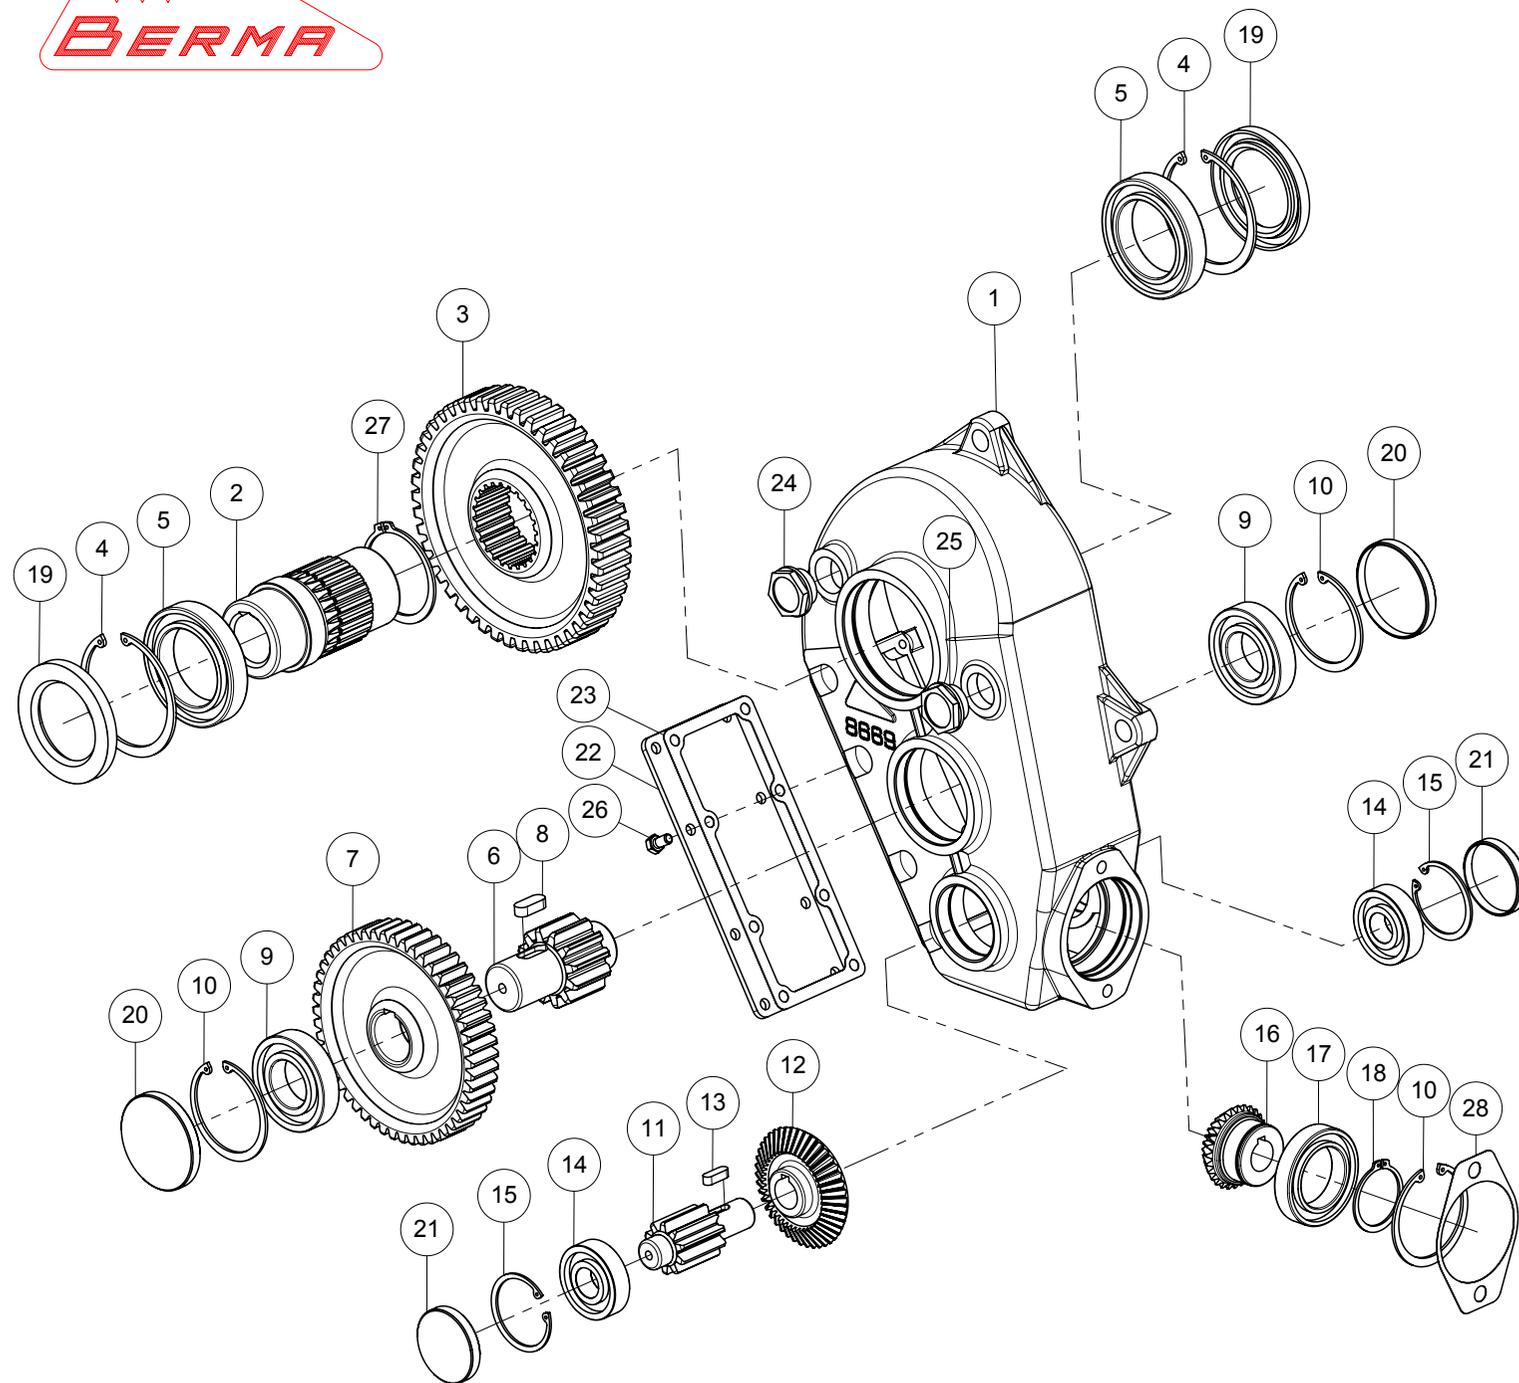


Riduttore RT300 Ø40

CODICE 8640

Fig.	Rif.	Descrizione	Qt.
1	8669	Scatola RT300	1
2	8670-7	Mozzo Ø40	1
3	8670-6	Ruota dentata Z=46	1
4	3439	Seeger I 100	2
5	8702	Cuscinetto 6013	2
6	8670-5	Pignone di rinvio Z=12	1
7	8670-4	Ruota dentata Z=50	1
8	4174	Chiavetta 12x8x30	1
9	3342	Cuscinetto 6208	2
10	3435	Seeger I 80	3
11	8670-3	Pignone di rinvio Z=10	1
12	8670-2	Corona conica Z=43	1
13	3396	Chiavetta 8x7x25	1
14	8596	Cuscinetto 6305	2
15	3433	Seeger I 62	2
16	8670-1	Pignone Z=28	1
17	1538	Cuscinetto 6010	1
18	3428	Seeger E 50	1
19	8701	Anello di ten. 65/100/10	2
20	8243	Tappo Ø80 sp.10	2
21	8625	Tappo Ø62 sp.10	2
22	8668	Coperchio RT300	1
23	8668-1	Guarnizione coperchio	1
24	9175	Tappo Ø1" Gas	1
25	1831	Spia liv. olio Ø1"Gas	1
26	3284	Vite TE M8x16-8G	8
27	8703	Seeger E 72	1
28	8671	Guarnizione x motore	1




RT 500 - K85 - K105VR up to 2023.

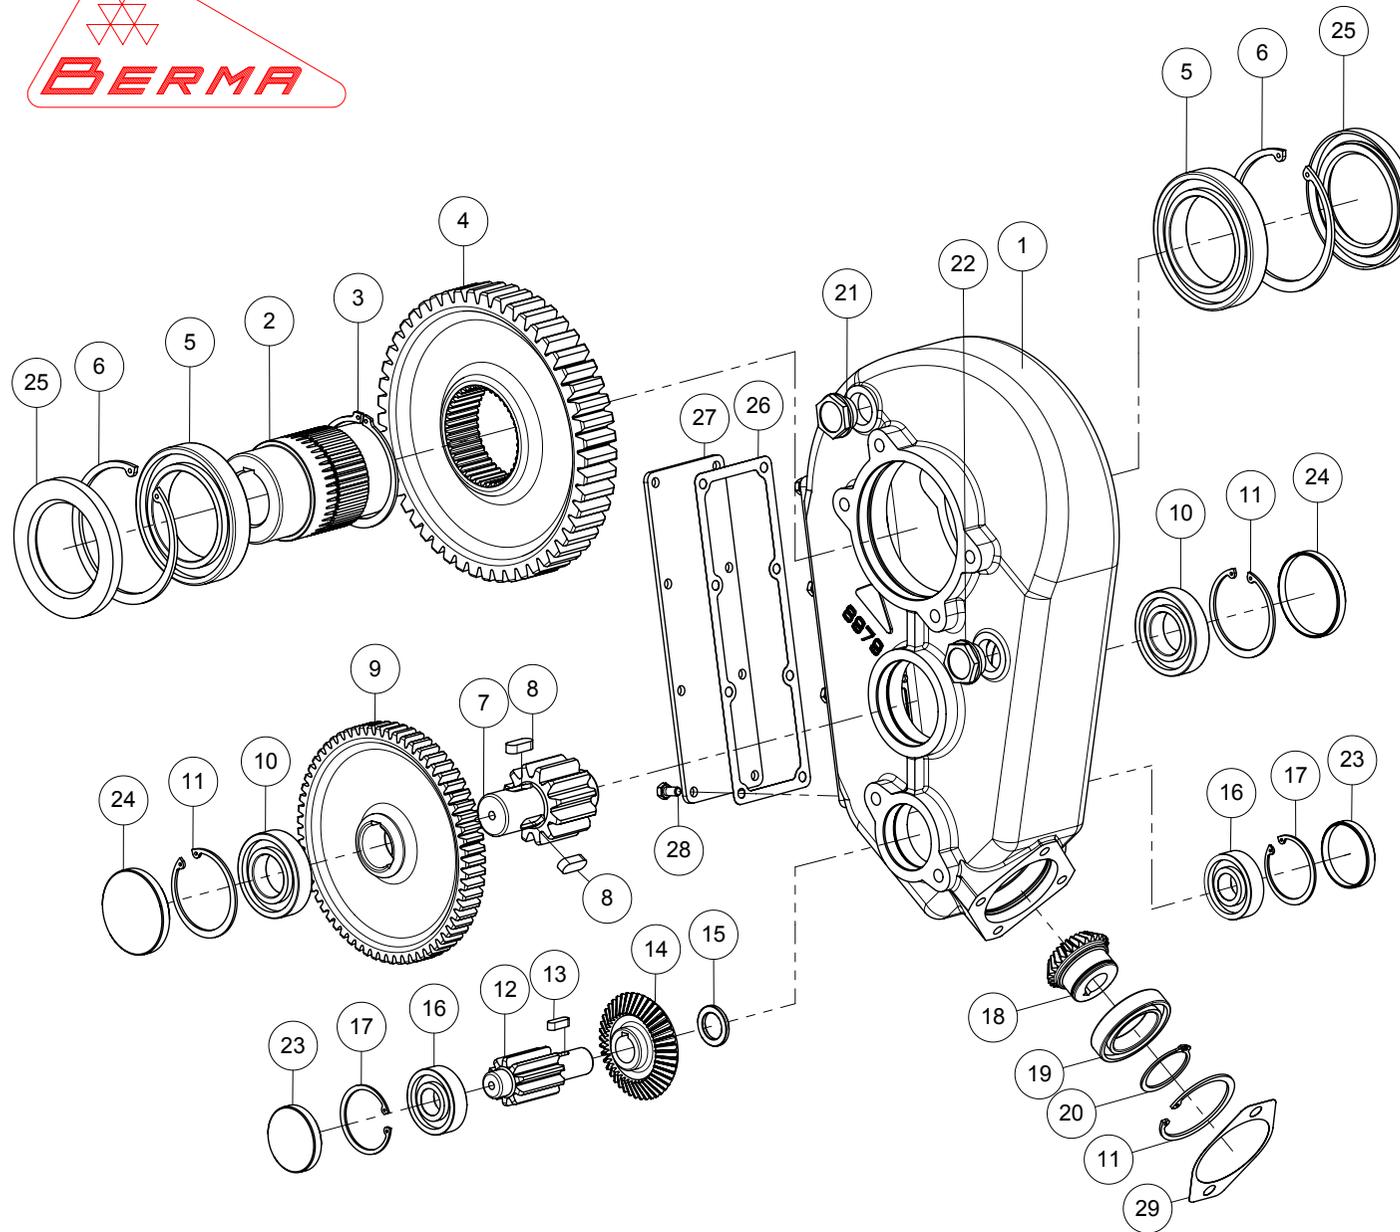


RT500 Gearbox

CODE 8981

Fig.	P/N	Description	Qt.
1	8979	RT500 Housing	1
2	9070	Hub Ø50	1
3	9066	Circlip Ring E 95	1
4	8996	Gear Z=54	1
5	9067	Bearing 6017	2
6	9069	Circlip I 130	2
7	9009	Return Pinion Z=12	1
8	4174	Key 12x8x30	2
9	9007	Gear Z=63	1
10	3342	Bearing 6208	2
11	3435	Circlip I 80	3
12	9008	Return Pinion Z=10	1
13	3396	Key 8x7x25	1
14	8670-2	Conical Crown Z=43	1
15	9010	Spacer for Crown	1
16	8596	Bearing 6305	2
17	3433	Circlip I 62	2
18	8670-1	Pinion Z=28	1
19	1538	Bearing 6010	1
20	3428	Circlip E 50	1
21	9175	Cap Ø1" Oil	2
22	1831	Level indicator Ø1" Oil	2
23	8625	Cap Ø62 sp.10	2
24	8243	Ring Ø80 sp.10	2
25	9068	Ten Ring. 85/130/12	2
26	9064	Gasket	1
27	9065	Cover	1
28	3284	Bolt TE M8x16-8G	8
29	8671	Gasket	1

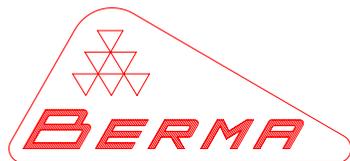

RT 800 - K135VR

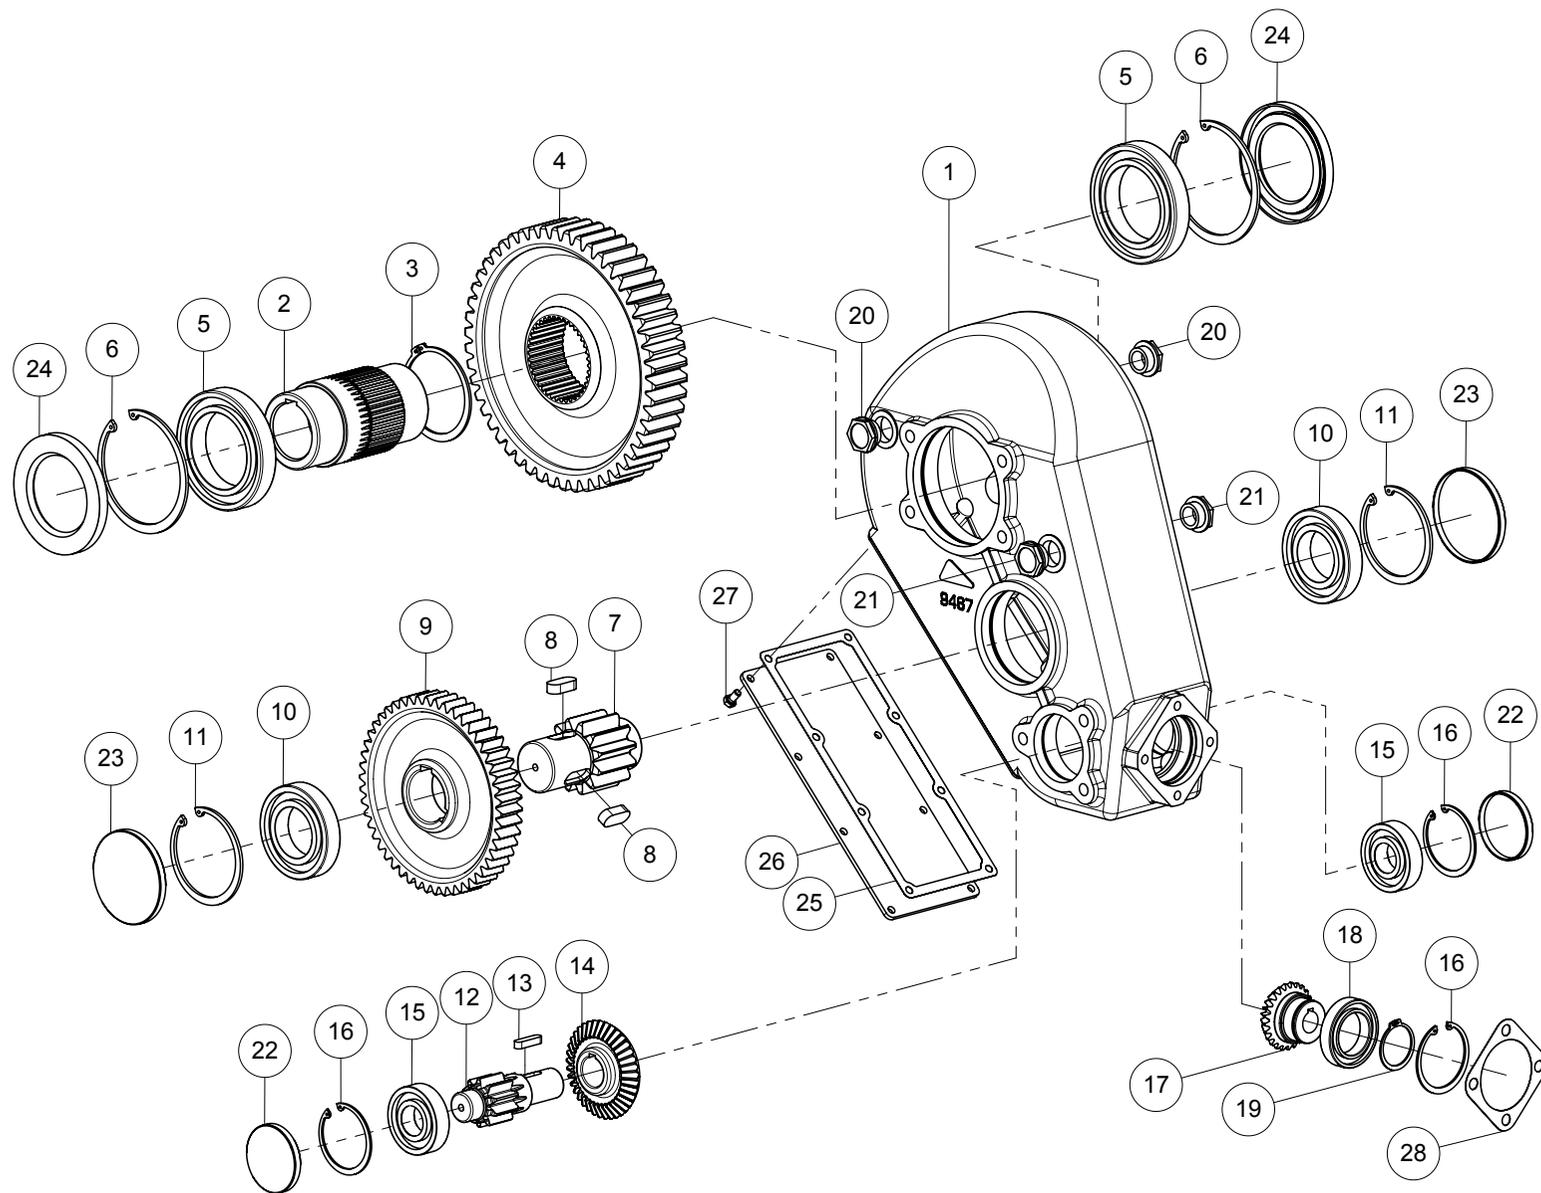


RT800 Gearbox

CODE 9480

Fig.	P/N	Description	Qt.
1	9467	RT800 Housing	1
2	9713	Hub Ø65	1
3	7587	Circlip Ring E 100	1
4	9466	Gear Z=50	1
5	9526	Bearing 6018	2
6	7479	Circlip I 140	2
7	9464	Return Pinion Z=12	1
8	9528	Key 18x11x40	2
9	9465	Gear Z=50	1
10	7748	Bearing 6212	2
11	7482	Circlip I-110	2
12	9469	Return pinion Z=10	1
13	3404	Key 10x8x40	1
14	9462	Conical Crown Z=38	1
15	3339	Bearing 6307	2
16	3435	Circlip I 80	3
17	9461	Pinion Z=25 Ø25	1
18	1538	Bearing 6010	1
19	3428	Circlip E 50	1
20	9175	Site Plug Ø1"	2
21	1831	Level Indicator Ø1" Glass	2
22	8243	Cap Ø80 sp.10	2
23	9529	Cap Ø110 sp.10	2
24	9527	Seal Ring 90/140/13	2
25	9472	Gasket	1
26	9471	Lid	1
27	3284	Vite TE M8x16-8G	8
28	9915	Guarnizione x motore	1

POS	COD.	QT.	POS	COD.	QT.
1	59.CARCASSA	1	33	DIN988PS-125x100x0.3	1
2	6010-2RS	1	34	RAM85-.2	1
3	UNI7437-I-80	1	35	RAM85-.3	1
4	UNI7438-I-62	2	36	RAM62-.2	1
5	UNI7438-I-85	2	37	RAM62-.3	1
6	UNI 7437-I-125	2	38	RAM80-.2	1
7	3-4GAS-SLNS	1	39	RAM80-.3	1
8	3-4GAS-TCN	1	40	DIN988PS-62x50x0,25	1
9	3-4GAS-TC	1	41	DIN988PS-62x50x0.1	1
10	RONDELLARAME3-4SP 1.5	1	43	59.CANOTTO#1	1
11	59.COPERCHIO	1			
12	UNI5739-M8x16-10.9-Z	10			
13	RONDELLARAME1-2SP 1.5	1			
14	1-2GAS-30A-CIL	1			
15	TARGHETTA-GT	1			
16	6305	2			
17	6209	2			
18	6016	2			
19	59.1,54P0	1			
20	UNI 7435-E-50	1			
21	TT35x5	1			
22	NBR-TC-50-80-10	1			
23	59.1,54C0	1			
24	59.5,0PC	1			
25	TT62x10	2			
26	NBR-TC-80-125-12	2			
27	TT85x10	2			
28	59.4,58PC	1			
29	59.5,00CC	1			
30	59.4,58CC	1			
31	UNI 7435-E-88	1			
32	DIN988PS-125x100x0.2	1			

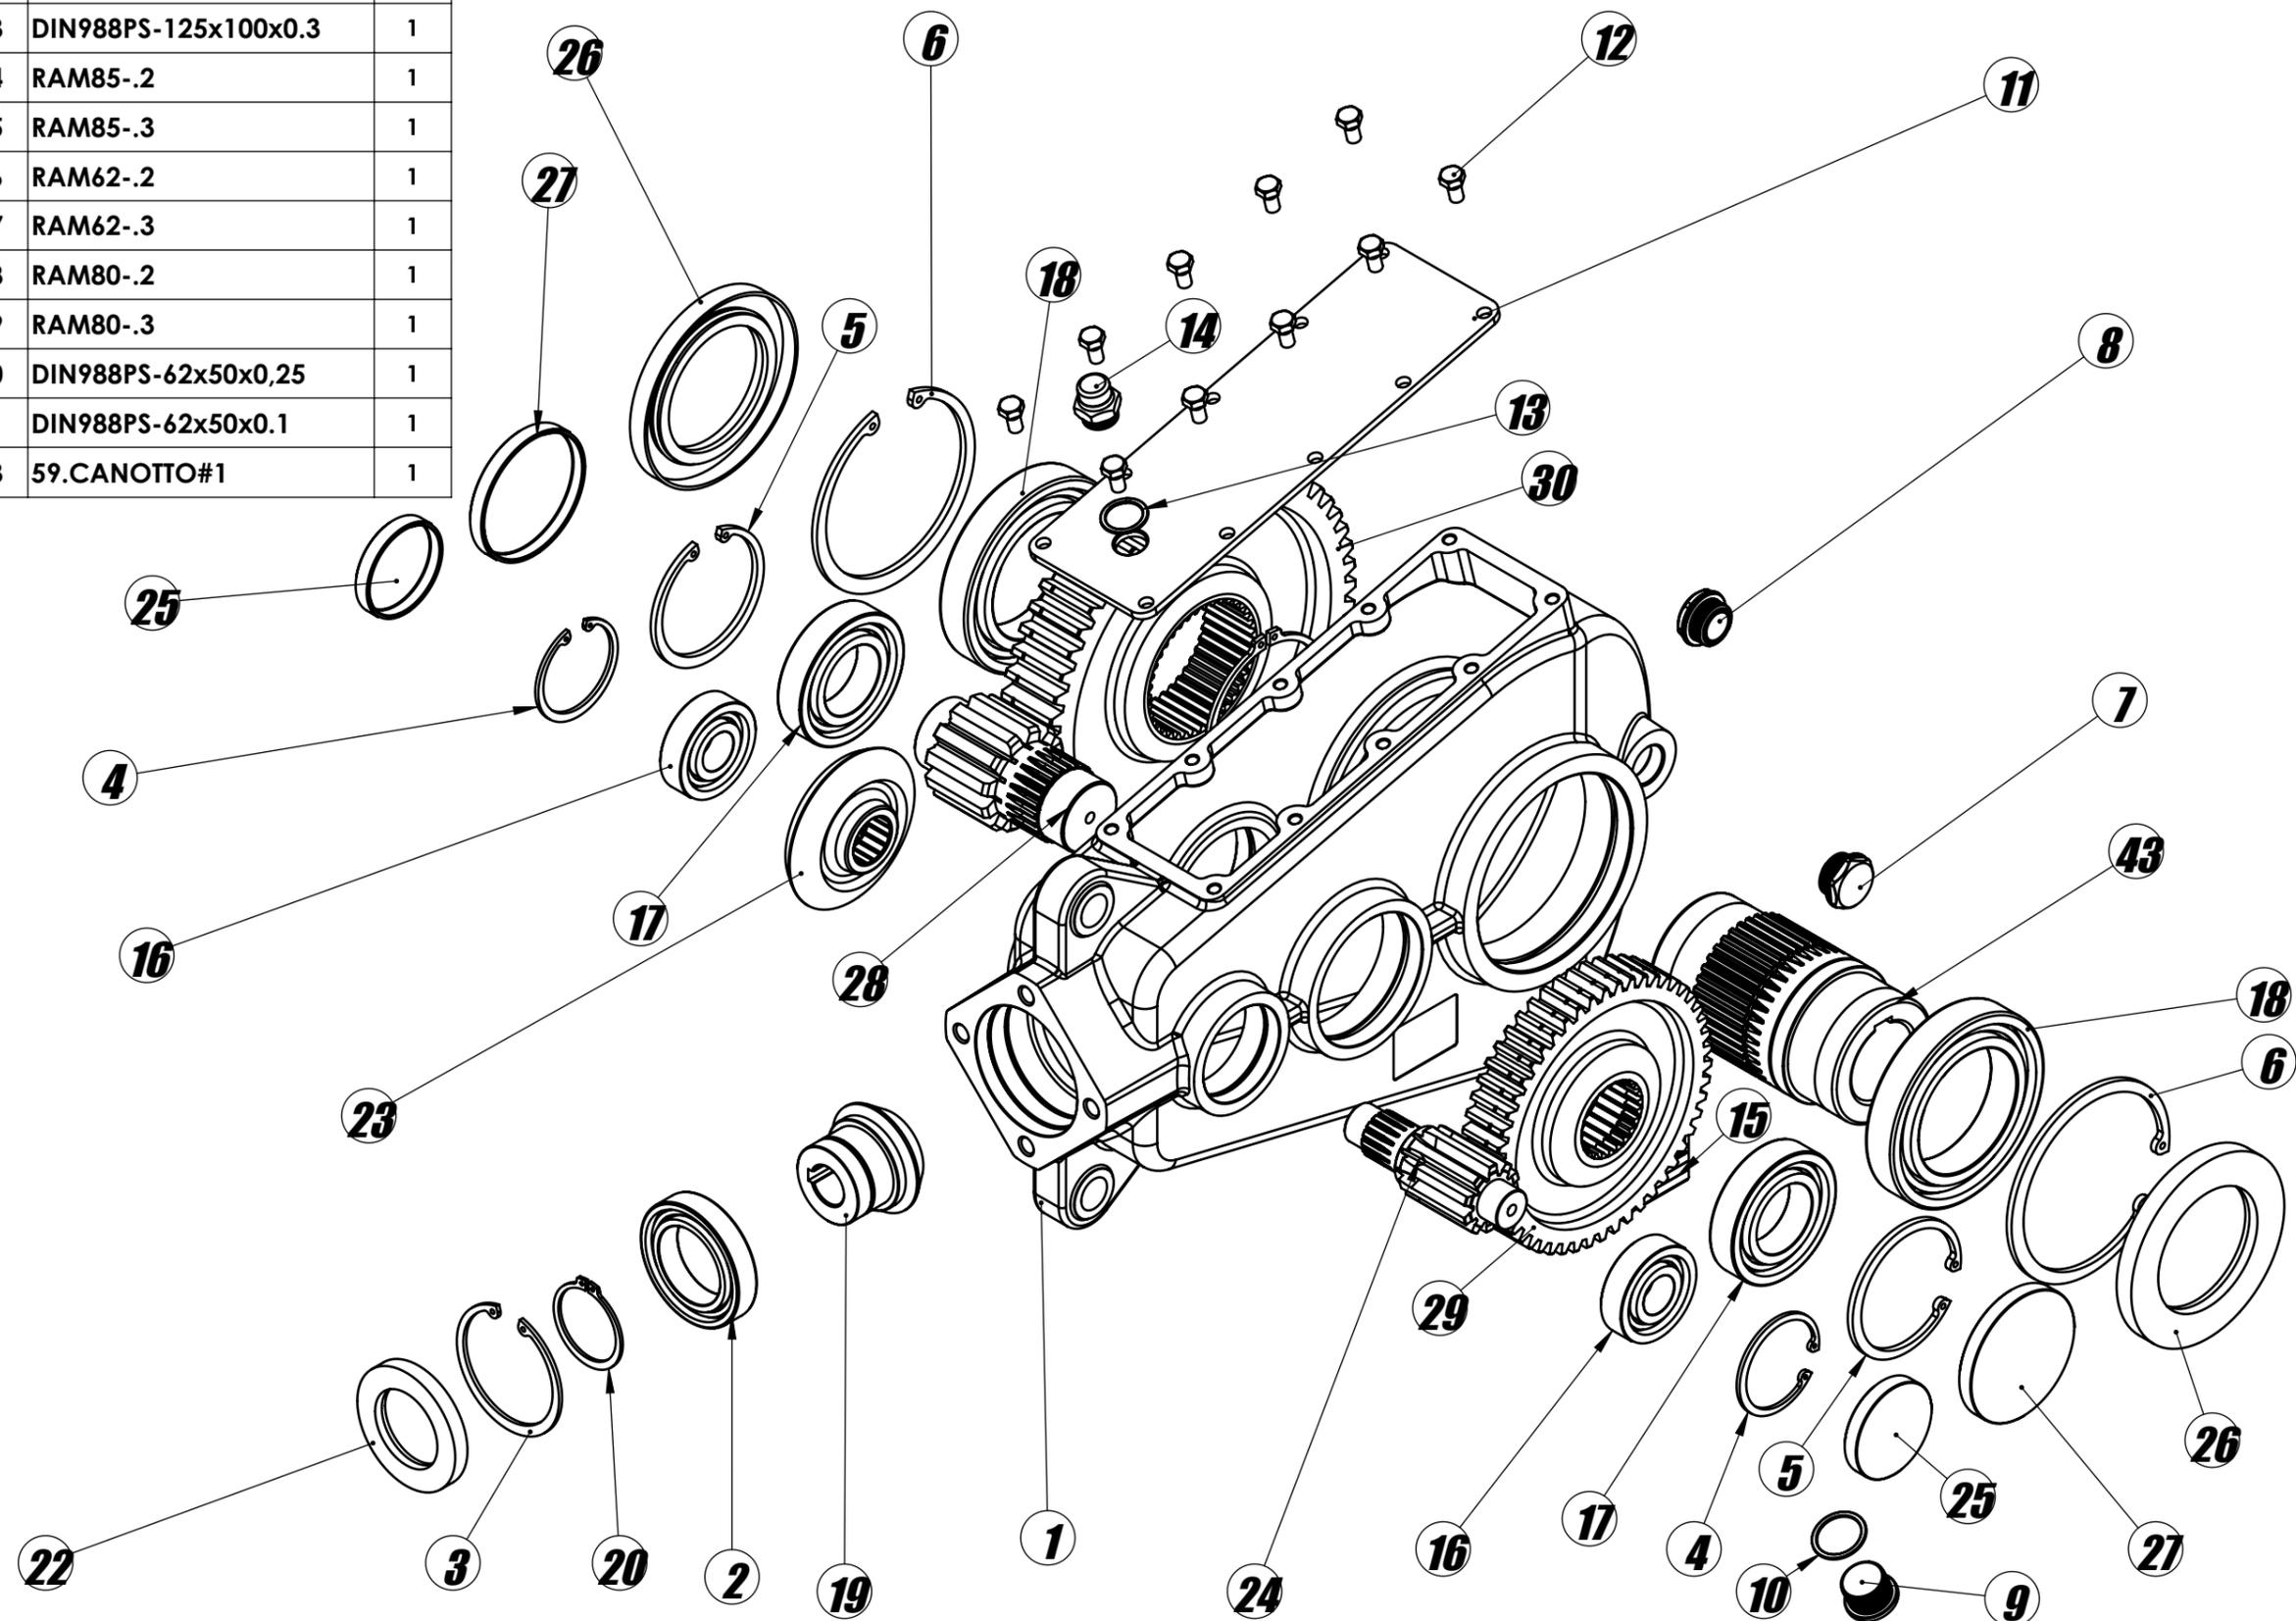


ratio transmission 35,2:1	input RPM 400	input rotation CCW counterCW	input power HP 11	input power KW 8	input torque N.M 135	output torque N.M 4700
--	--------------------------------	---	------------------------------------	-----------------------------------	---------------------------------------	---



OMG-40 = K85 - K105VR - 2023 Onwards.

PROPIETA' RISERVATA AI TERMINI DI LEGGE

POS	COD.	QT.
1	NBR-TC-50-90-10	1
2	UNI7437-I-90	2
3	6210	2
4	TT80x10	1
5	UNI7437-I-80	2
6	6208	1
7	17.CARCASSA#1	1
8	3-8GAS-30A-CON	1
9	17.ALBERO#2	1
10	3-8GAS-NPTF	1
11	TARGHETTA-GT	1
12	6208-2RS	1
13	17.3,00C0	1
14	TT90x10	1
15	UNI5739-M8x16-10.9-Z	6
16	1-2GAS-TC	1
17	RONDELLARAME1-2SP 1.5	2
18	1-2GAS-38A	1
19	17.COPERCHIO	1
20	RAM80-.3	1
21	RAM80-.2	1
22	RAM90-.2	1
23	RAM90-.3	1
25	17.3,00P2	1

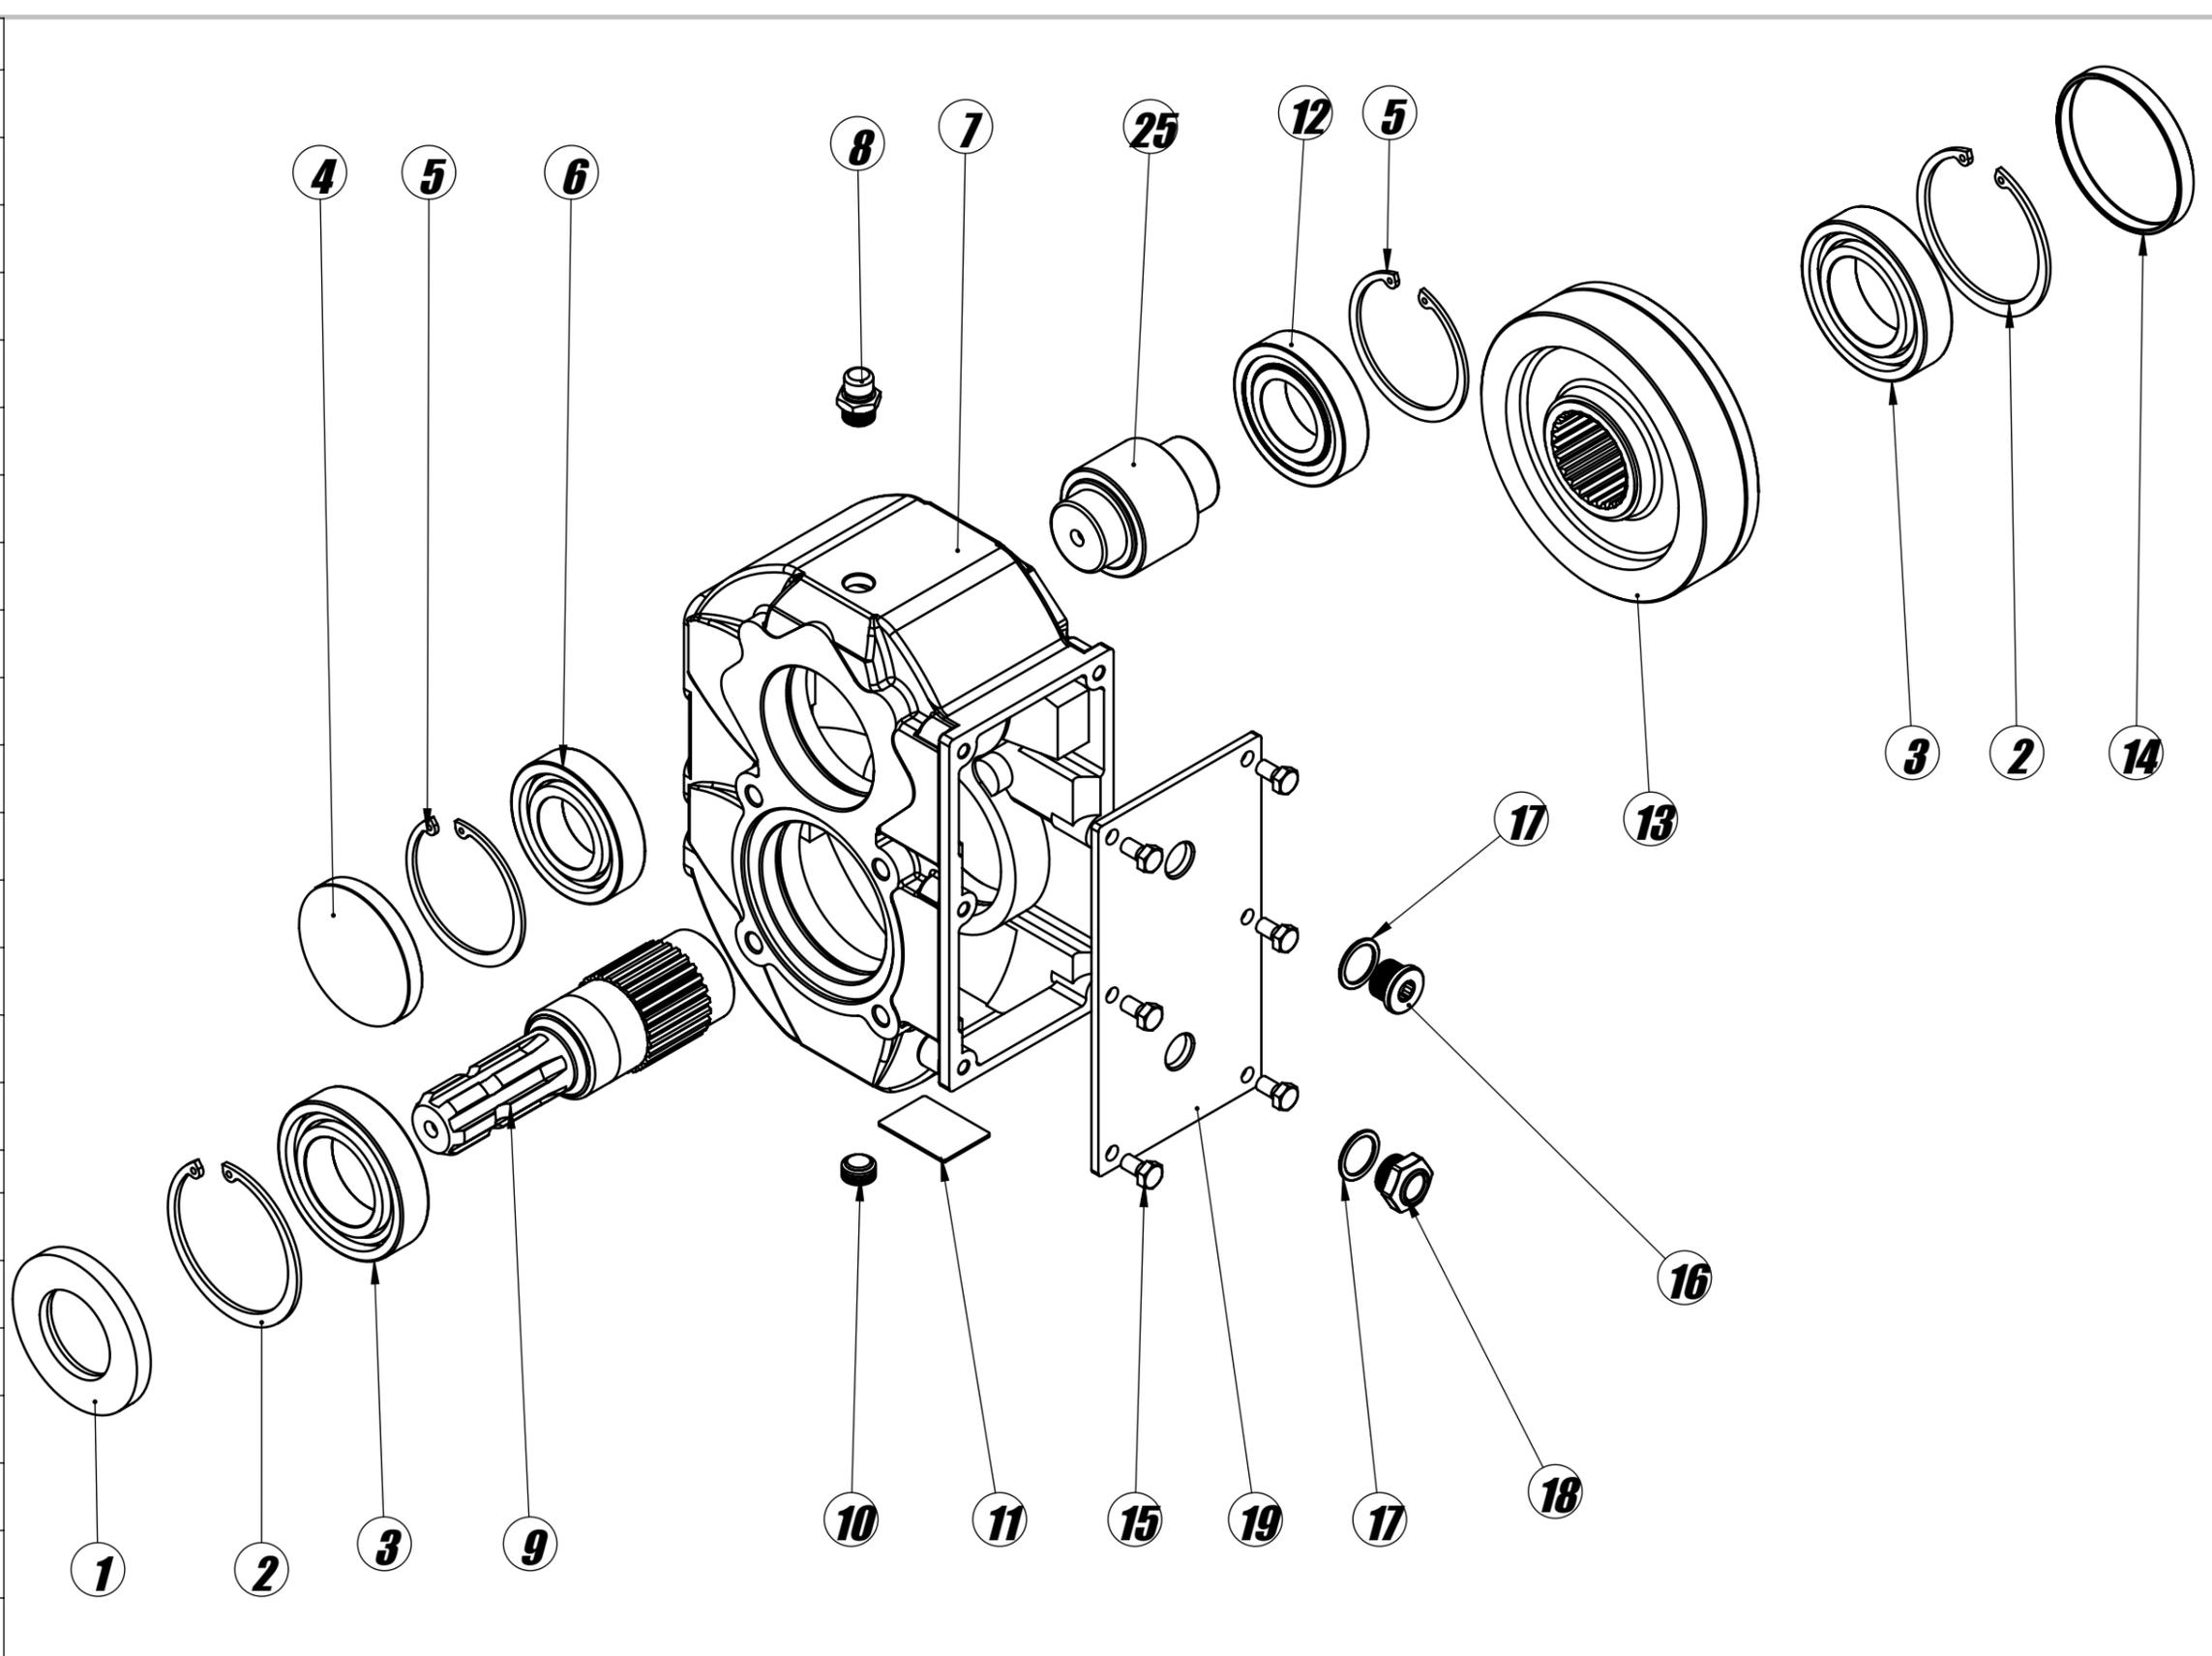

<i>ratio transmission</i> 1:3,00	<i>input RPM</i> 540	<i>input rotation</i> CCW counterCW	<i>input power HP</i> 66	<i>input power KW</i> 49	<i>input torque N.M</i> 860	<i>output torque N.M</i> 290
--	--------------------------------	---	------------------------------------	------------------------------------	---------------------------------------	--



M51#21 = PTO Power Driver XE & XESC