



# FORLEGO

IP65 IK06 CE       
CODE **FO01**

**TYPOLGY** Bollard  
**INSTALLATION POSITION** On Ground  
**INSTALLATION LOCATION** Outdoor

## FORLEGO

**POWER** 21W  
**WEIGHT** 5.6KG  
**DIMENSION** 1M

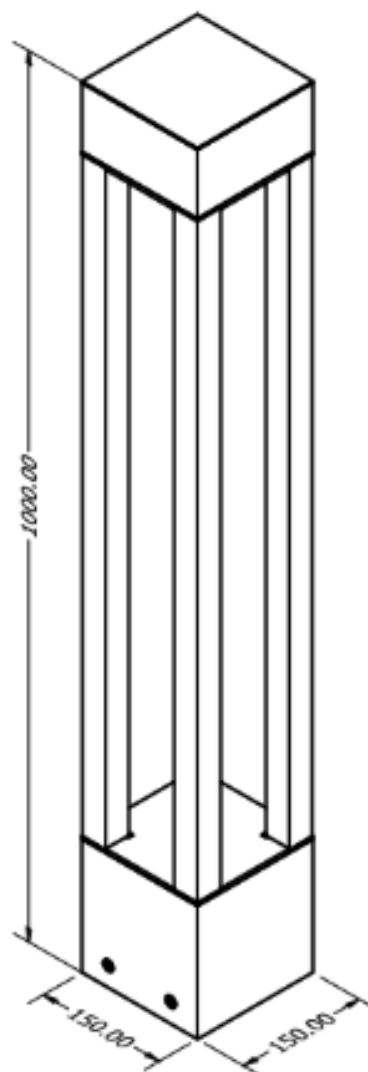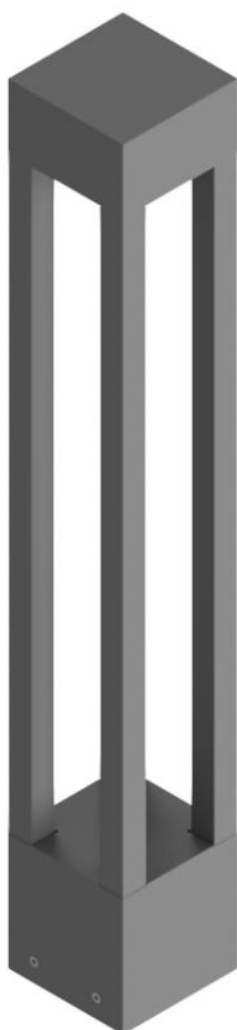

## ELECTRICAL FEATURES

---

|                   |              |
|-------------------|--------------|
| POWER CONSUMPTION | 21W          |
| POWER SUPPLY      | 230 VAC      |
| POWER SUPPLY UNIT | Integrated   |
| DIMMING           | On/Off       |
| CONNECTION        | Main voltage |

## LIGHTING FEATURES

---

|                   |                            |
|-------------------|----------------------------|
| LED COLOR         | 2200K, 2700K, 3000K, 4000K |
| CRI               | >80                        |
| OPTICS            | 60°                        |
| TOTAL REAL LUMENS | 647 lm (60°)               |
| AVERAGE LED LIFE  | 50.000h L80 B10            |

## GENERAL FEATURES


---

|                        |                           |
|------------------------|---------------------------|
| OPERATING TEMPERATURE  | 50°C                      |
| INGRESS PROTECTION     | IP65                      |
| IMPACT RESISTANCE      | IK06                      |
| GLOW WIRE TEST         | 960°C                     |
| SCREEN TEMPERATURE     | 40° @ Ta = 25°            |
| APPLIANCE CLASS        | I                         |
| WALKOVER               | NO                        |
| DRIVE OVER             | NO                        |
| TEMPERED GLASS         | Yes                       |
| POWER CABLES           | Provided with 50 cm cable |
| STANDARD SAFETY        | /                         |
| PHOTOBIOLOGICAL SAFETY | GR1                       |
| MATERIAL               | Aluminium 6063 T6         |

# ACCESSORIES

## FORLEGO

---

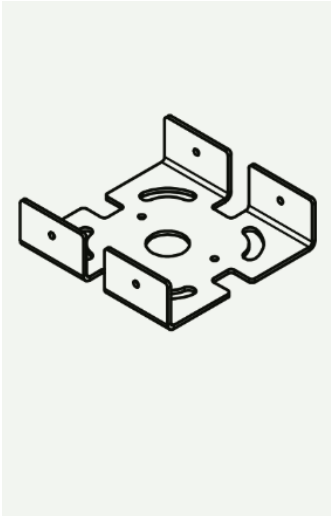

**CODE** FOBA

**TYPOLGY** *Base*

**WEIGHT** *0.58Kg*

**MATERIAL** *Galvanized Steel*