

LMRE-DA-180HT | Battery Cell

ENGINEERED POWER, BATTERY DATA SHEET




DOT Tested · Hermetically Sealed · High Quality · Reliable & Safe

Serviceability is part of our promise. Engineered Power's global network of engineers provides localized expert design, experienced service knowledge, and timely product delivery where you want it and when you need it.

Battery Features

- primary
- lithium thionyl chloride
- high energy
- extreme temperature
- moderate rate
- custom terminations
- non-bulge design

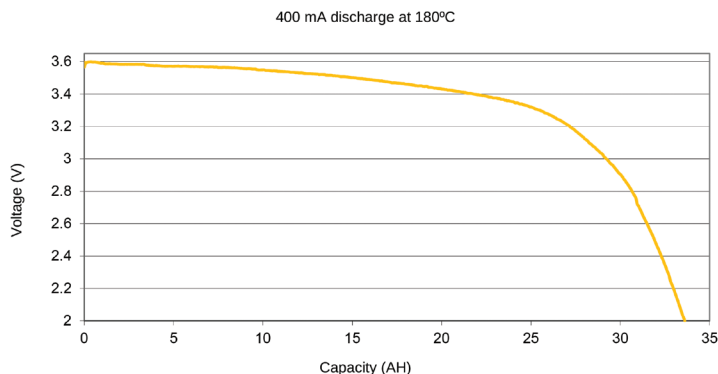

Technical Data

Capacity:
33 AH Nominal

Voltage:
3.67 V OCV
3.56 V CCV - 400 mA, 180°C

Constant Current Capability:
400 mA Nominal
800 mA Max

Operating Temperature:
+104°F to +356°F
+40°C to +180°C

Physical Data

Diameter:
1.86 inch \pm 0.010 (47.2 mm)

Height:
3.33 inch \pm 0.050 (84.6 mm)

Weight:
12.5 ounces (355 grams \pm 5)

Shock & Vibration Data

UN/DOT Certified

Shock Test:
To be determined

Vibration Test:
To be determined

Suitable Applications

Measurement while drilling (MWD),
logging while drilling (LWD), oil well
instrumentation.

Minimize Risk. Maximize Your Power.

Tel 403 235 2584
info@engineeredpower.com


ENGINEERED POWER
engineeredpower.com

POWERED BY
LITHION

Updated: May 2021