

BATTERIES

POL-R


TECHNICAL DATA SHEET



P4DAGMDT

SPECIFICATIONS

Part Number	P4DAGMDT	
BCI	4D	
Volt	12 Volts	
Type	AGM	
Terminal	Dual, auto post + stud 3/8"	
Container Material	Polypropylene	
Reserve Capacity	25A	445 min
	75 A	115 min
Capacity	20 Hr	200 Ah
	5 Hr	172 Ah
Operating Temp. Range	Discharge	-15~50°C (5~122°F)
	Charge	0~40°C (32~104°F)
	Storage	-15~40°C (5~104°F)



carbon



GENERAL FEATURES

Stable initial capacity

- PAM/NAM amount optimization
- 4BS crystal paste mixing & curing technology
- Double layer separator technology
- Improved design electrolyte S.G.

Less water loss

- PAM/NAM amount optimization
- New PAM/NAM recipe introduced
- Rare earth alloy

Solve NAM sulphation

- Carbon boost technology
- Pre-sulfate technology

Improved PSoC cycling

- Carbon boost technology
- Mix carbon boost technology
- Targeting for higher level through carbon technology

Delay PAM softening and shedding

- Plate assembly pressure re-engineering
- 4BS crystal paste mixing & curing technology
- Higher paste density

Optimize electrolyte stratification

- Introduce new AGM technology


Excellent deep cycle performance

- Plate assembly pressure re-engineering
- New PAM/NAM recipe introduced
- AGM electrolyte technology
- Rare earth alloy
- Double layer separator technology
- Lower acid filling temperature

DIMENSIONS


Length	527 mm (20 3/4")
Width	214 mm (8 7/16")
Case Height	220 mm (8 11/16")
Overall Height	244 mm (9.61")
Weight	56.1 kg (9 5/8")

DRAWING

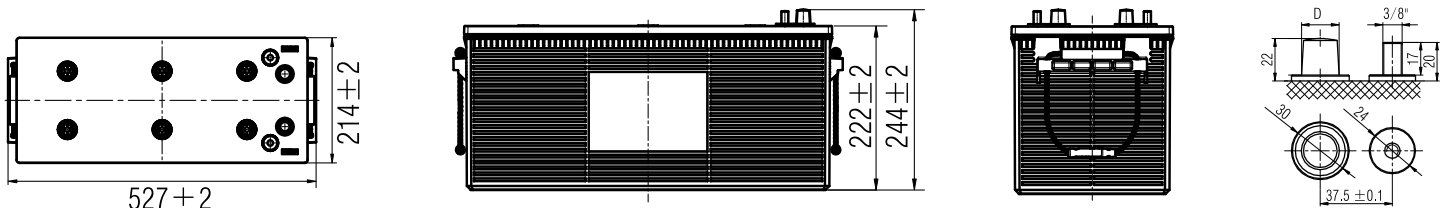


CHARGE / DISCHARGE PERFORMANCE CURVES


Charging Profiles

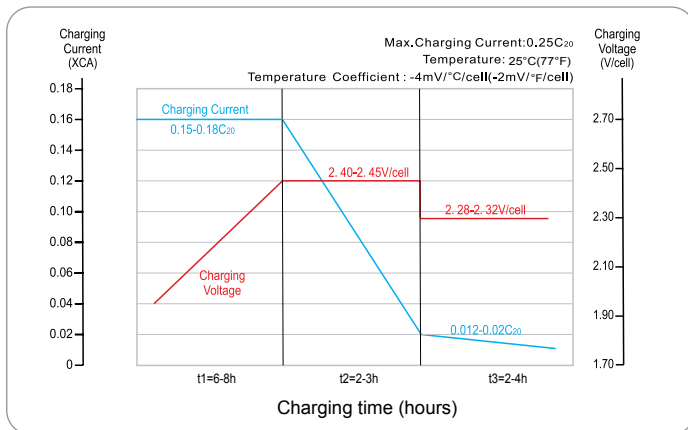


Relationship of OCV and State Of Charge

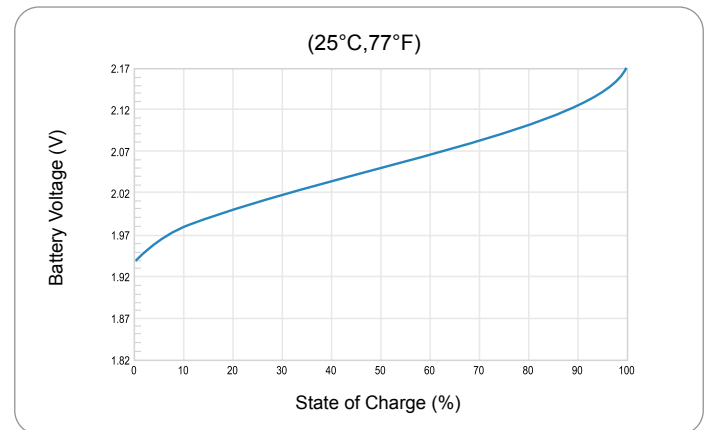

Cycle Life in Relation to Depth Of Discharges

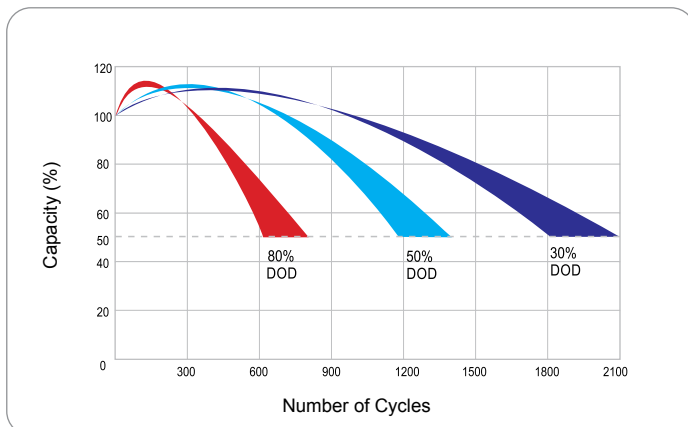

Self-discharge Characteristics

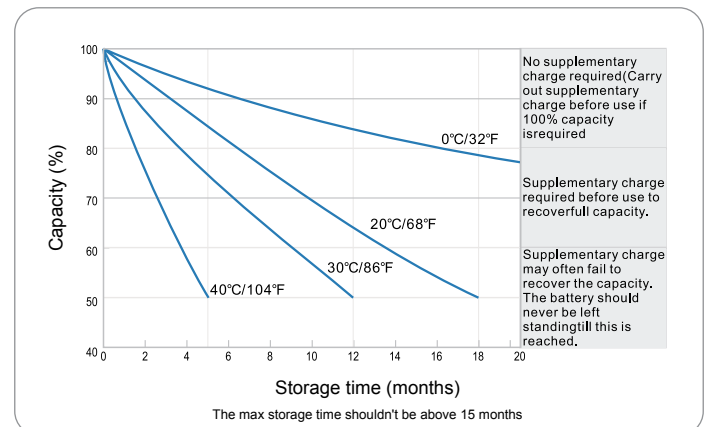

POL-R, all rights reserved. POL-R is not liable for damages that may occur from any information provided in or omitted from this publication, under any circumstances. POL-R reserves the right to make changes or adjustments to this publication at any time without notices or obligations.

POL-R