

TECHNICAL DATA SHEET

P24R75

SPECIFICATIONS

Part Number	P24R75
BCI Group	24R
Tension	12 Volts
Capacity @20h	85 Ah
Cold Starting Capacity	750 CCA
Technology	Calcium
Type	Wet Acid
Acid Density	1,280
Reserve Capacity	145 min.
Terminal Type	SAE (auto post)
Polarity	
Case Material	Polypropylene
Base Hold Down	B1
Integrated Hydrometer	Yes
Service Cap	No
Maintenance	Maintenance Free
Classification	UN2794


PICTURE



DIMENSIONS

Lenght	260 mm (10 1/4")
Width	173 mm (6 13/16")
Height	225 mm (8 7/8")
Weight	18.3 kg (40.3 lbs)

INTEGRATED HYDROMETER

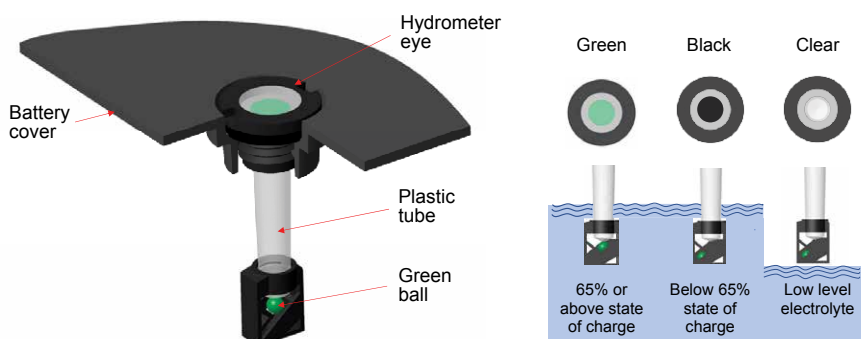

POL-R, all rights reserved. POL-R is not liable for damages that may occur from any information provided in or omitted from this publication, under any circumstances. POL-R reserves the right to make changes or adjustments to this publication at any time without notices or obligations.

CHARGE INDICATOR	SPECIFIC GRAVITY (25°C)	OPEN CIRCUIT VOLTAGE	CHARGING STATE (%)
GOOD  STATUS (65%+)	1.285	12.81	100
	1.265	12.69	90
	1.245	12.57	80
	1.225	12.45	70
CHARGING NECESSARY  STATUS (65%-)	1.205	12.33	60
	1.185	12.21	50
	1.165	12.09	40
	1.145	11.97	30
	1.125	11.85	20
	1.105	11.73	10