

IES-0204FT

4 10/100TX + 2 100FX Industrial Switch

- Wide-range redundant power with polarity reverse protection
- Compact size with DIN rail and wall mount design
- Wide operating temperature range from -40°C to 70°C (-E model)



OVERVIEW

The Lantech IES-0204FT is a 4-port 10/100TX + 2-port 100FX Industrial Switch for plug-and-play installation. It can auto detect power inputs and supports wide input range from 9V to 56VDC. To increase reliability, the IES-0204FT provides redundant power design with polarity reverse protection as well as EFT and ESD protections.

The Lantech IES-0204FT is designed to meet the demands of industrial environments, comes packaged in a robust IP-30 housing and has been tested extensively to meet Industrial EMI and EMC standards. Rigorous mechanical testing has also been undertaken with free fall, shock, and vibration stability


test, which ensure long term reliability in critical industrial environments. The -E model can be used in extreme environments with an operating temperature range from -40°C to 70°C.

Featured with relay contact to alarm system, the IES-0204FT can immediately notify of power failure event. The Lantech IES-0204FT is compact in size and easy to be installed with DIN rail and wall mount kit. It is the best choice both in inflammable or normal industrial environment such as automation, transportation, heavy Industrial factory, mining, oil & gas, chemical, and processing automation area.

FEATURES & BENEFITS

- RJ-45 port support Auto MDI/MDI-X Function
- Store-and-Forward Switching Architecture
- Back-plane (Switching Fabric): 1.2Gbps
- 2K MAC address table
- Supports Wide Operating Temperature (-40°C~70°C)
- Provides EFT protection 2000VDC for power line
- Supports 6000 VDC Ethernet ESD protection
- IP-30 Protection with DIN Rail and Wall Mount Design
- Power Supply
 - Wide-range Redundant Power Design
 - Power Polarity Reverse Protect
 - Overload Current Re-settable Fuse Present
- Provides broadcast storm protection

DIMENSIONS (unit=mm)

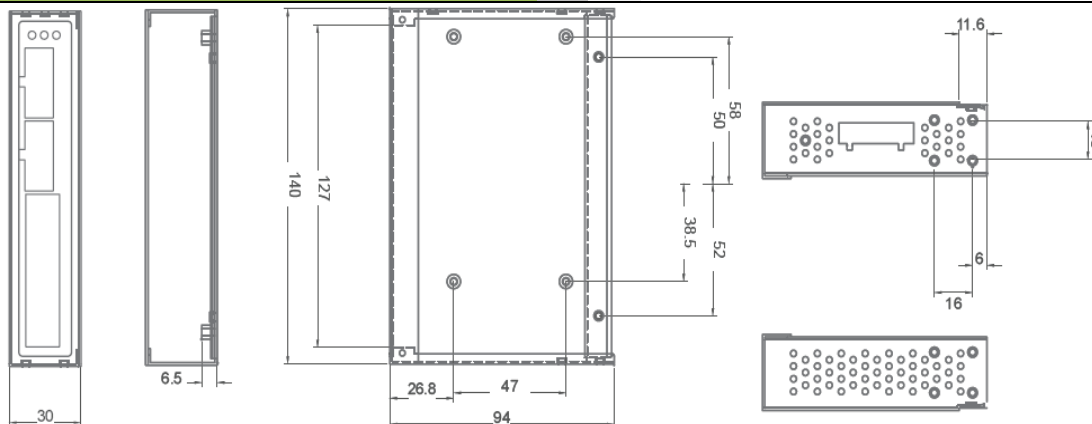

SPECIFICATION

Hardware Specification			
IEEE Standards	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX and 100Base-FX Fast Ethernet IEEE802.3x Flow Control and Back Pressure	protection	
Switch Architecture	Back-plane (Switching Fabric): 1.2Gbps	Overload current protection	Present
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port	Power Supply	24 VDC (9~56VDC), 18 VAC(12~36 VAC), Redundant power with polarity reverse protect function and removable terminal block
Mac Address	2K MAC address table	Power Consumption	6.41 Watts
Connectors	10/100TX: 4 x RJ-45 with auto MDI/MDI-X function 100M fiber: 2 x SC type connector for Single-mode or Multi-mode type fiber cable [Multi-Mode] power budget : Min: 9dB , MAX: 19dB. [Single-Mode] power budget : Min: 19dB , MAX: 26dB.	Operating Humidity	5% ~ 95% (Non-condensing)
Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5, 6 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5, 6 cable EIA/TIA-568 100-ohm (100m)	Operating Temperature	-20°C~60°C / -4°F~140°F (Standard model) -40°C~70°C / -40°F~158°F (E model)
Optical Cable	Multi-mode: 50/125um~62.5/125um Single-mode: 9/125um Available distance: 2km (Multi-mode)/30km (Single-mode) Wavelength: 1310nm (Multi-mode/Single-mode)	Storage Temperature	-40°C~85°C / -40°F~185°F
Protocol	CSMA/CD	Case Dimension	Metal case, IP-30, 30mm (W) x 95mm (D) x 140mm (H)
LED	Per port: Link/Activity (Green), Full duplex/Collision (Yellow) Per unit: Power 1 (Green), Power 2 (Green), Fault(Red)	Weight	810 g
Reserve polarity	Present	Installation	DIN Rail and Wall Mount Design
		EMI & EMS	FCC Class A, CE EN61000-4-2 (ESD), CE EN61000-4-3 (RS), CE EN-61000-4-4 (EFT), CE EN61000-4-5 (Surge), CE EN61000-4-6 (CS), CE EN61000-4-8, CE EN61000-4-11, CE EN61000-4-12, CE EN61000-6-2, CE EN61000-6-4
		Safety	CE/EN60950-1
		Stability Testing	IEC60068-2-32 (Free fall) IEC60068-2-27 (Shock) IEC60068-2-6 (Vibration)
		MTBF	347014 hrs
		Warranty	5 years

ORDERING INFORMATION

- **IES-0204FT-ST-MM.....P/N: 8350-347**
4 10/100TX + 2 100FX (ST, MM 2km) Industrial Switch, Standard Operating Temperature (-20°C~60°C)
- **IES-0204FT-SC-MM.....P/N: 8350-340**
4 10/100TX + 2 100FX (SC, MM 2km) Industrial Switch, Standard Operating Temperature (-20°C~60°C)
- **IES-0204FT-SC-SM.....P/N: 8350-341**
4 10/100TX + 2 100FX (SC, SM 30km) Industrial Switch, Standard Operating Temperature (-20°C~60°C)
- **IES-0204FT-SC-MM-AC.....P/N: 8350-340-AC**
4 10/100TX + 2 100FX (SC, MM 2km) Industrial Switch, Standard Operating Temperature (-20°C~60°C)
- **IES-0204FT-SC-SM-AC.....P/N: 8350-341-AC**
4 10/100TX + 2 100FX (SC, SM 30km) Industrial Switch, Standard Operating Temperature (-20°C~60°C)
- **IES-0204FT-E-ST-MM.....P/N: 8350-348**
4 10/100TX + 2 100FX (ST, MM 2km) Industrial Switch, Wide Operating Temperature (-40°C~70°C)
- **IES-0204FT-E-SC-MM.....P/N: 8350-345**
4 10/100TX + 2 100FX (SC, MM 2km) Industrial Switch, Wide Operating Temperature (-40°C~70°C)
- **IES-0204FT-E-SC-SM.....P/N: 8350-346**
4 10/100TX + 2 100FX (SC, SM 30km) Industrial Switch, Wide Operating Temperature (-40°C~70°C)
- **IES-0204FT-E-SC-MM-AC.....P/N: 8350-345-AC**
4 10/100TX + 2 100FX (SC, MM 2km) Industrial Switch, Wide Operating Temperature (-40°C~70°C)
- **IES-0204FT-E-SC-SM-AC.....P/N: 8350-346-AC**
4 10/100TX + 2 100FX (SC, SM 30km) Industrial Switch, Wide Operating Temperature (-40°C~70°C)

OPTIONAL ACCESSORIES

DIN Rail Power

- **MDR-40 Series** 40W Single Output Industrial Din Rail Power; 85-264VAC / 120-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 4% per degree from 60°C ~ 70°C)
- **MDR-20 Series** 20W Single Output Industrial Din Rail Power; 85-264VAC / 120-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2024 Copyright Lantech Communications Global Inc. all rights reserved. Updated on 18 November 2024
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
Lantech may make changes to specification and product descriptions at anytime, without notice.