徐工徐工　助您成功
SOLID TO SUCCEED

XCMG
Knuckle boom crane
SQZ565.8




XCMG, the Leader of Truck Mounted Cranes, Aerial Working Platforms, Bridge Inspection Vehicles and Road Wreckers in China

Technical Parameters


Item	Parameter
Brand	**XCMG**
Crane model	SQZ565.8
Max. lifting moment	49.4 mt
Max. lifting capacity	18,000 kg
Max. hydraulic outreach	20 m
Boom length	4.5~20 m
Max. Lifting height	22.1 m
Lifting angle	0~88°
Slewing angle	360° continuous
Outriggers span	2,300~8,000 mm
Operation	Wireless remote control
Max. pressure of hydraulic system	33 MPa
Recommended pump capacity	80 L/min @ 1000rpm
Hydraulic tank capacity	300 L
Crane weight	7,250 kg
Safety device	➢ Hydraulic balance valve; ➢ Hydraulic over-flow valve; ➢ Hydraulic double-way valve ➢ Hook safety latch, ➢ Level gauge etc. ➢ Auto moment limiter AML ➢ Double linkage system, improves the crane's motion geometry significantly ➢ High speed boom extension and retraction with Return Oil Utilization

Profile drawing and rated load

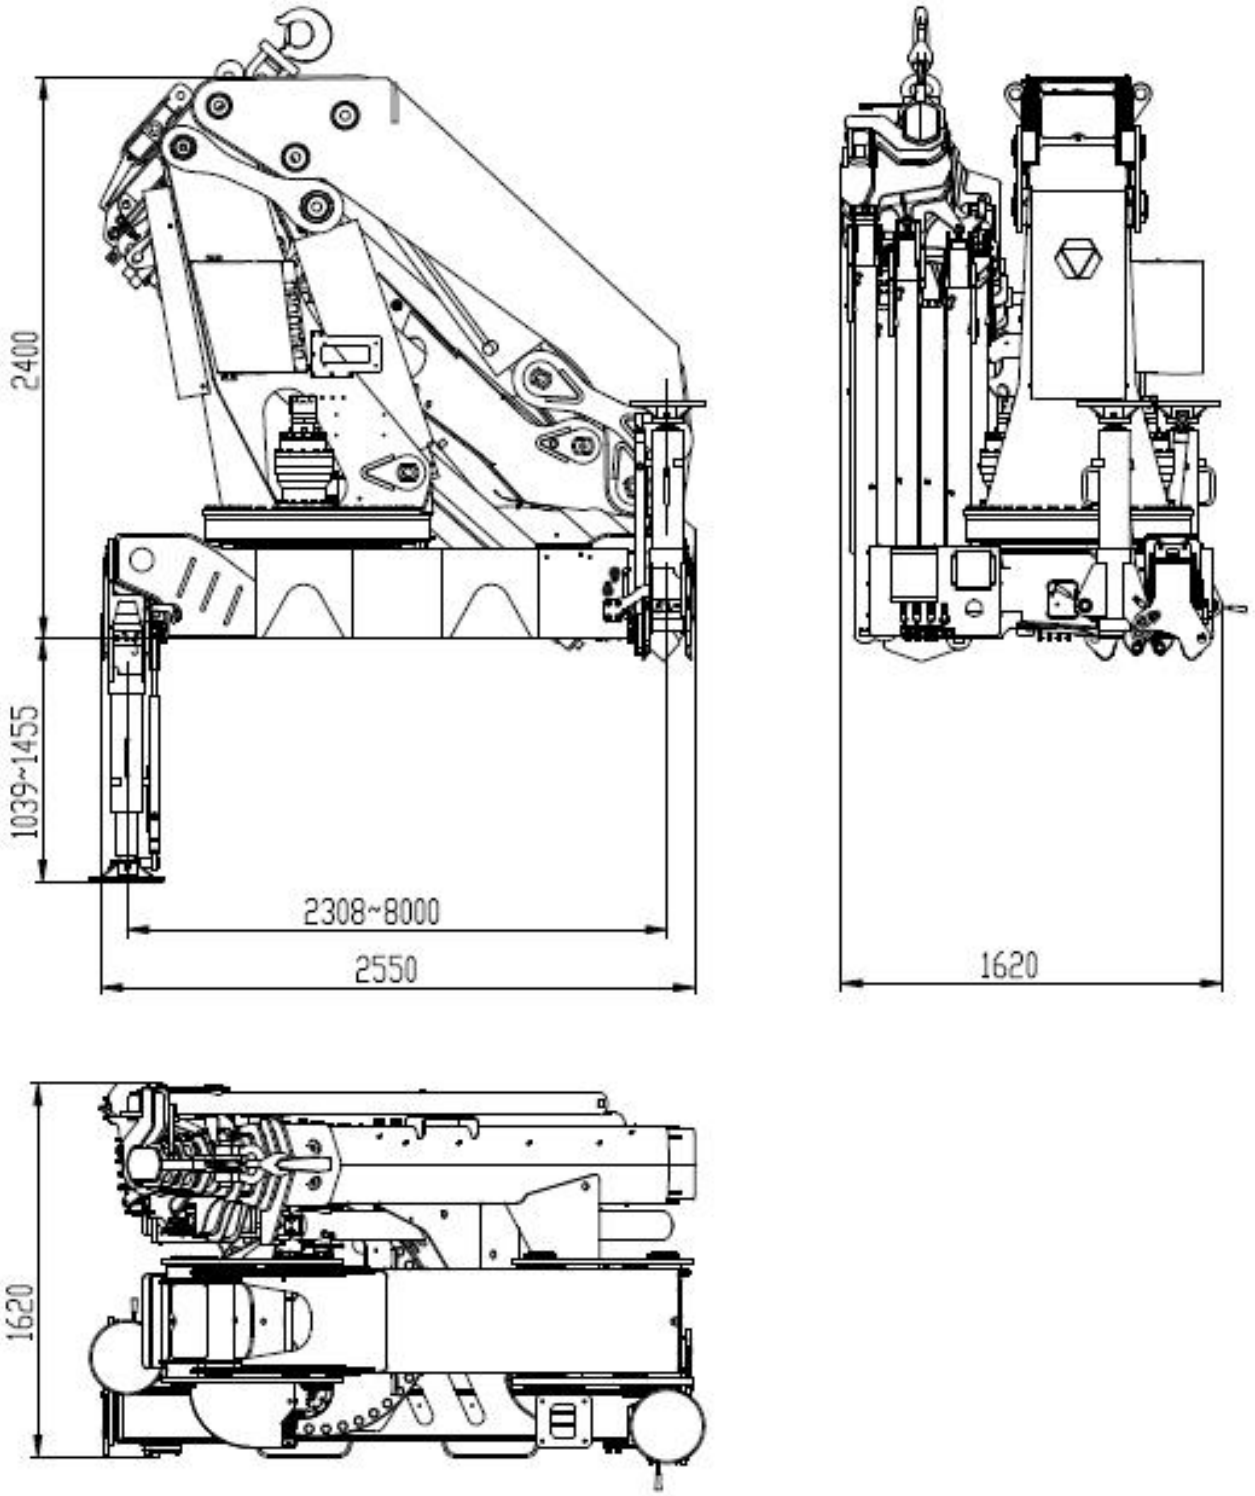

XCMG, the Leader of Truck Mounted Cranes, Aerial Working Platforms, Bridge Inspection Vehicles and Road Wreckers in China

Loading Diagram

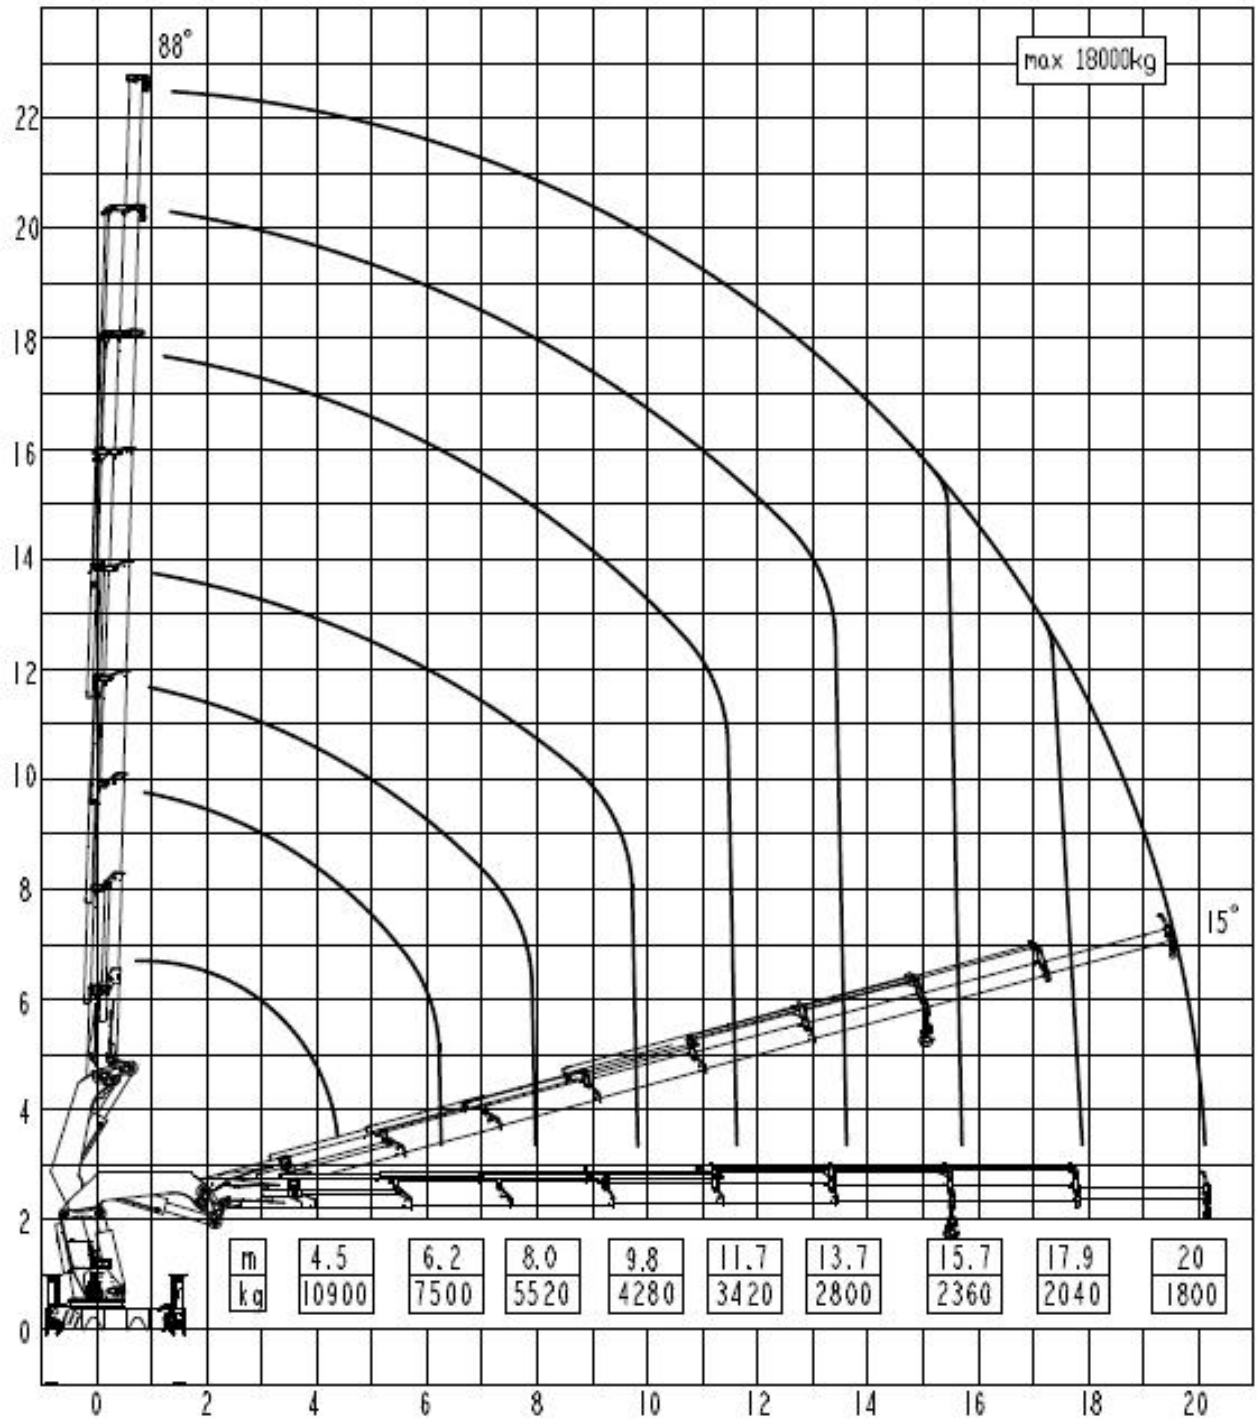

XCMG, the Leader of Truck Mounted Cranes, Aerial Working Platforms, Bridge Inspection Vehicles and Road Wreckers in China

徐工徐工　助您成功
SOLID TO SUCCEED







施工案例
CONSTRUCTION CASE









XCMG, the Leader of Truck Mounted Cranes, Aerial Working Platforms, Bridge Inspection Vehicles and Road Wreckers in China