徐工徐工　助您成功
SOLID TO SUCCEED

XCMG

Knuckle boom crane

SQZ865.8





XCMG, the Leader of Truck Mounted Cranes, Aerial Working Platforms, Bridge Inspection Vehicles and Road Wreckers in China


Technical Parameters

Item	Parameter
Brand	**XCMG**
Crane model	SQZ865.8
Max. lifting moment	73.4 mt
Max. lifting capacity	25,500 kg
Max. hydraulic outreach	19.8 m
Boom length	4.3~19.8 m
Max.lifting height	21.9 m
Max.lifting angle	0~86°
Slewing angle	360° continuous
Outriggers span	2,340~8,300 mm
Operation	Wireless remote control
Max. pressure of hydraulic system	33MPa
Recommended pump capacity	107 L/min @ 1000rpm
Hydraulic tank capacity	300 L
Crane weight	9,300 kg
Safety device	➢ Hydraulic balance valve; ➢ Hydraulic over-flow valve; ➢ Hydraulic double-way valve ➢ Hook safety latch, ➢ Level gauge etc. ➢ Auto moment limiter AML ➢ Double linkage system, improves the crane's motion geometry significantly ➢ High speed boom extension and retraction with Return Oil Utilization


Profile drawing and rated load

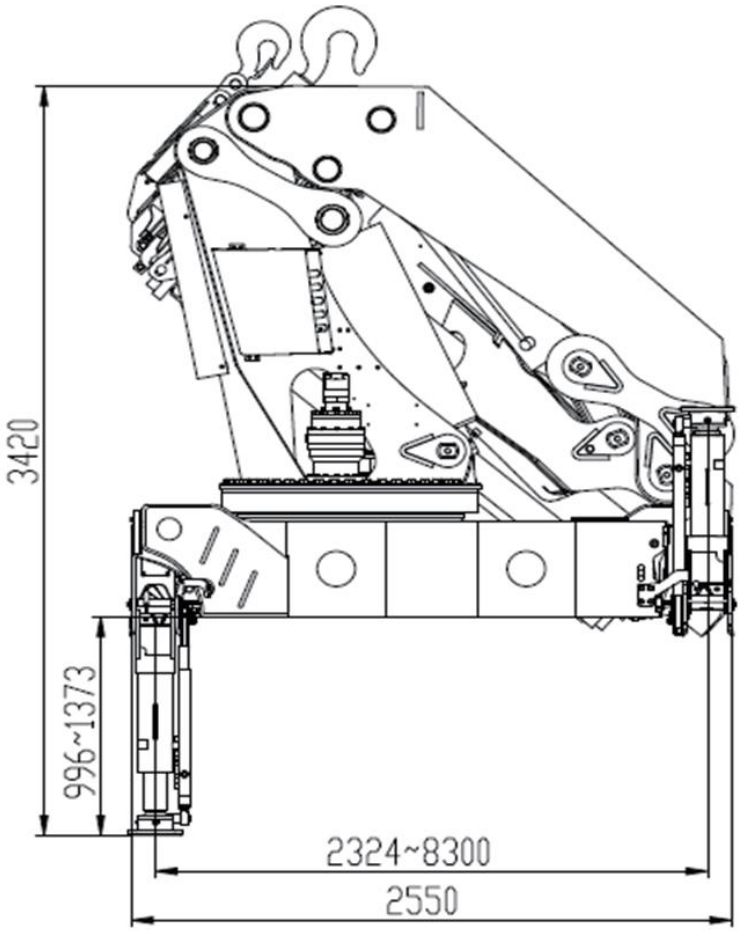

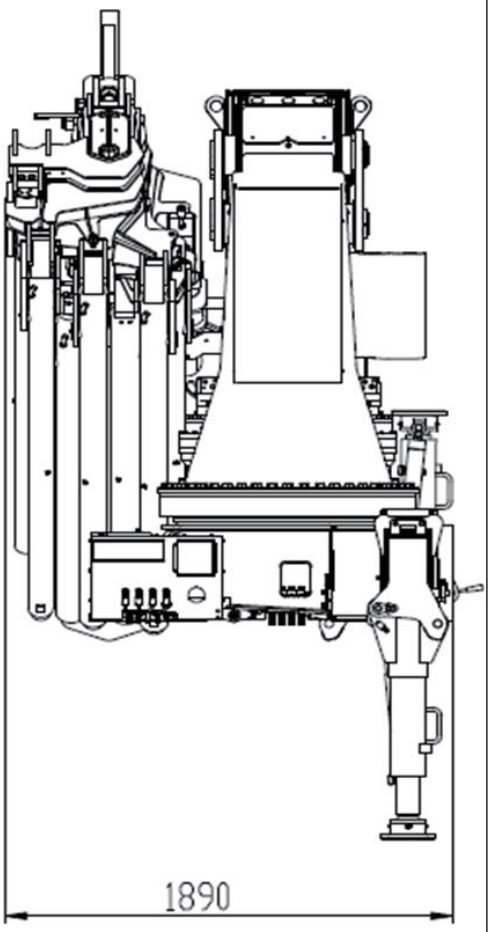

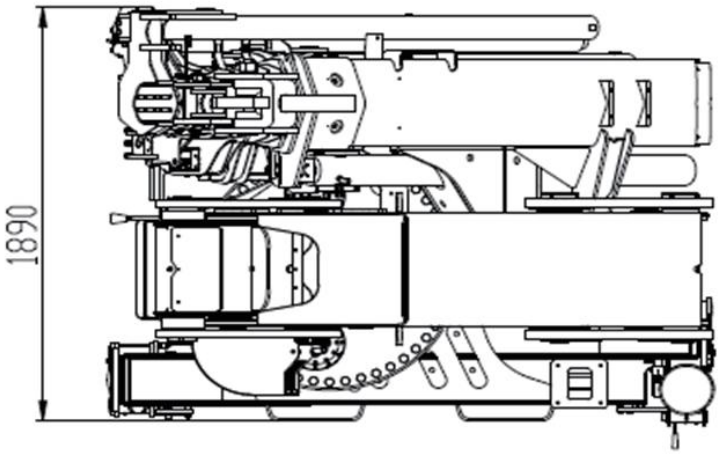

Loading Diagram

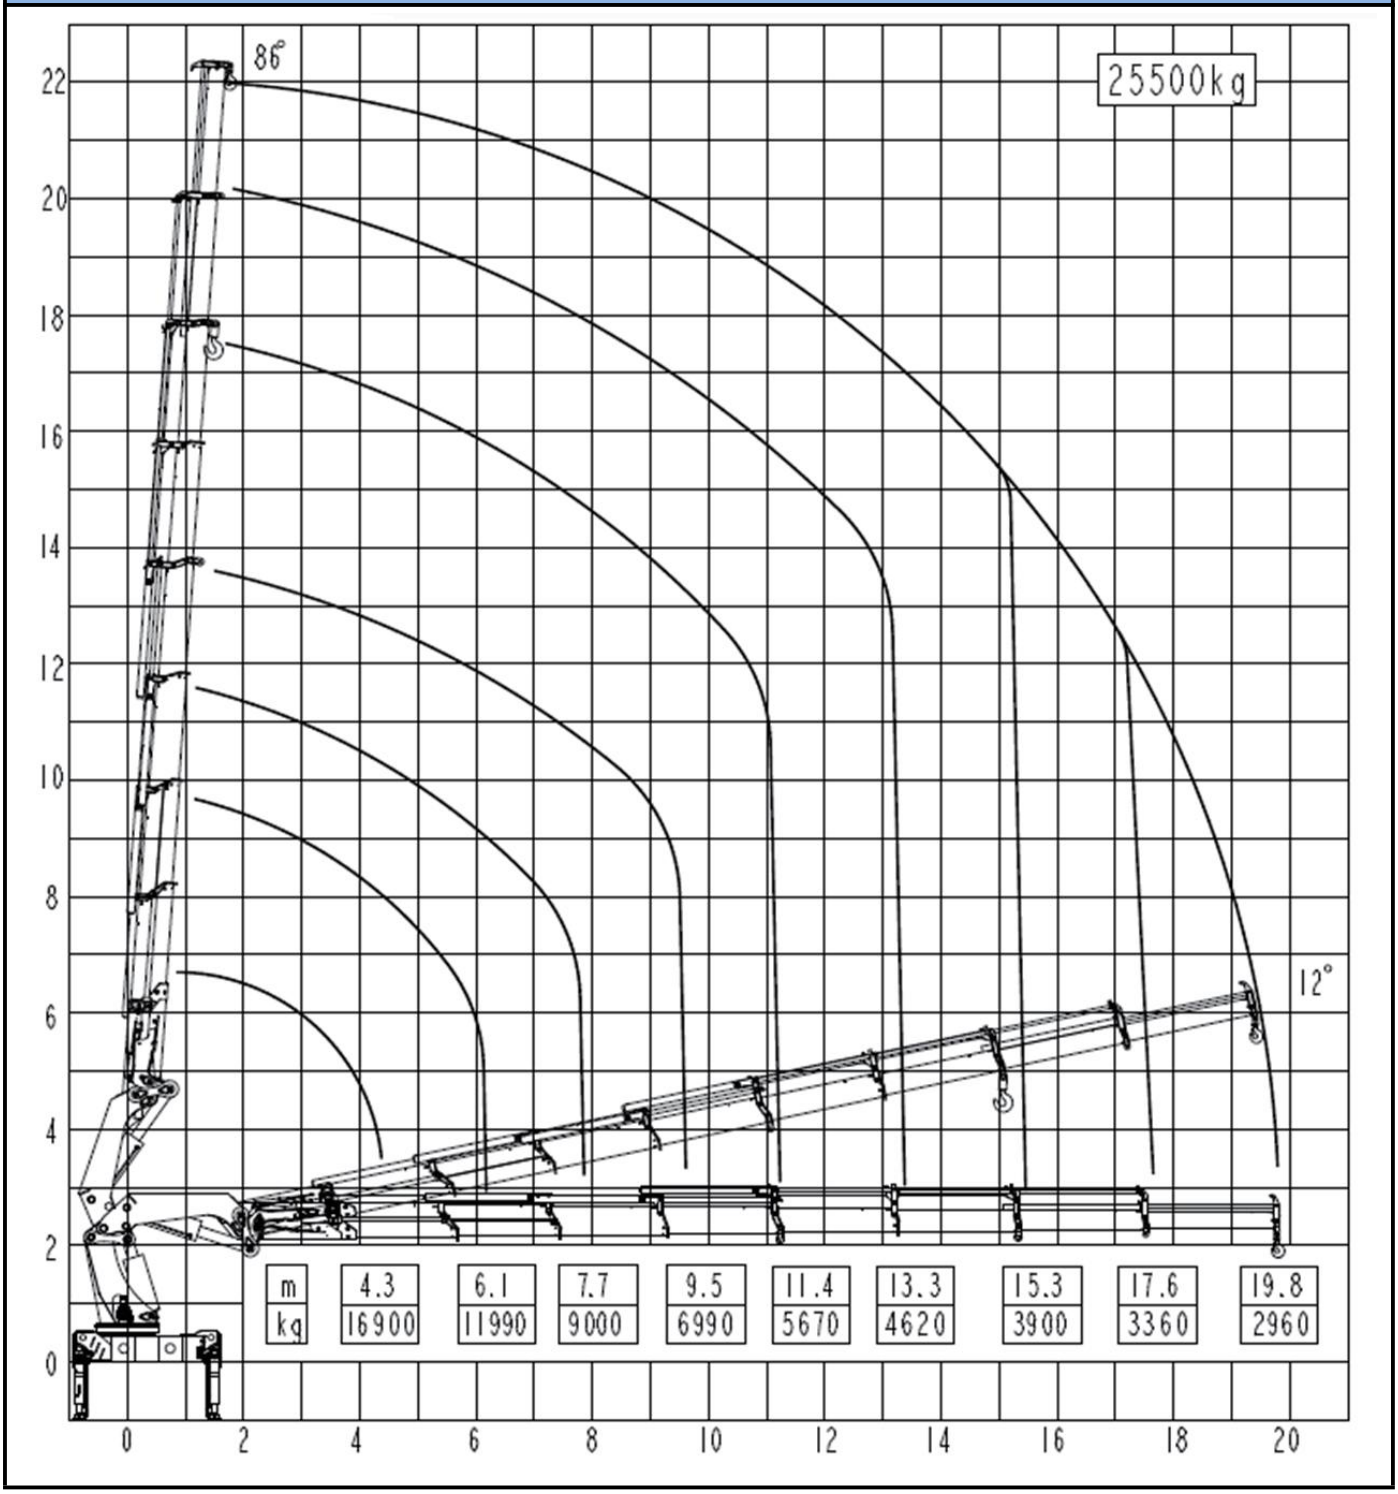

徐工徐工　助您成功
SOLID TO SUCCEED







施工案例
CONSTRUCTION CASE









XCMG, the Leader of Truck Mounted Cranes, Aerial Working Platforms, Bridge Inspection Vehicles and Road Wreckers in China