

TECHNICAL FEATURES UNGLAZED PORCELAIN TILES
 CONFORMING TO EUROPEAN STANDARDS EN 14411 ISO 13006 APP. G (Group BIA UGL Eb ≤ 0,5%)

-  sizes
EN ISO 10545-2 compliant
-  water absorption
EN ISO 10545-3 compliant
-  breaking strength
EN ISO 10545-4 compliant
-  abrasion resistance
EN ISO 10545-6 average $\leq 150\text{mm}^3$
-  thermal expansion coefficient
EN ISO 10545-8 $\leq 9\text{MK}^{-1}$
-  thermal shock resistance
EN ISO 10545-9 resistant
-  frost resistance
EN ISO 10545-12 resistant
-  chemicals resistance
EN ISO 10545-13 from ULA to ULB from UHA to UHB UA
-  stains resistance
EN ISO 10545-14 class 5
-  colors resistance to light
DIN 51094 no alteration after testing
-  friction coefficient
DIN 51130 ANSI A 1371 (DCOF) R10 matt R11 ultra matt > 0,42

Stonebook /

STONE DESIGN
 Stonebook /



DOWNLOAD
 AREA

Terratinta Group Srl SB

Via Viazza Il Tronco 45, 41042 Fiorano Modenese (MO) - Italy
www.terratintagroup.com  /Terratinta Group  /terratintagroup

Printed in March 2025

TERRATINTA group
 Certified Corporation


A company part of
 ITAL CER GROUP
 DESIGN SURFACES

ceramica
 magica

ceramica
 magica

Monolithica

± 9,5 mm

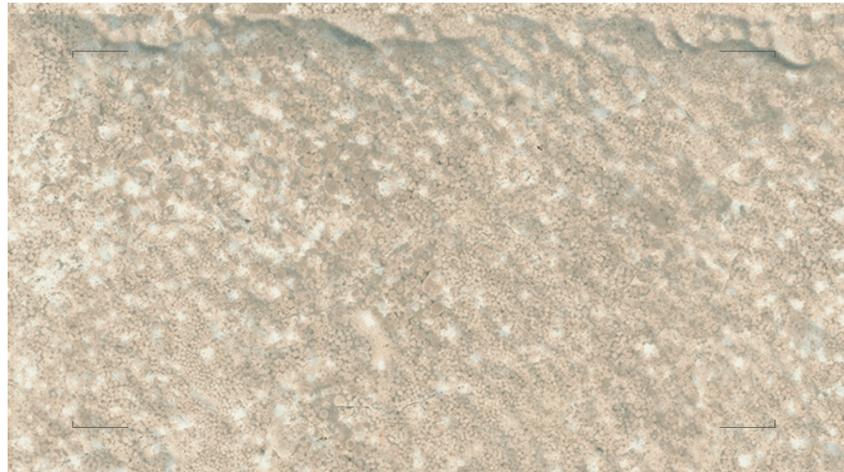


Cushion Edge CREAM

matt

Monolithica

± 9,5 mm

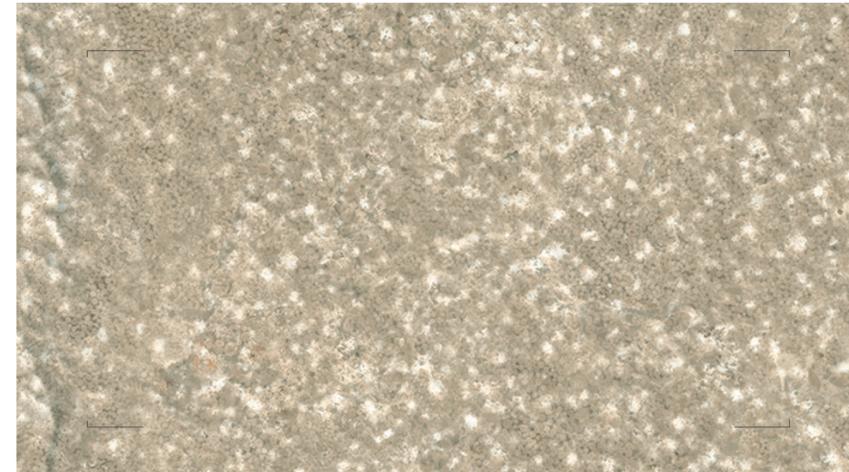


Cushion Edge TAUPE

matt

Offcut

± 9,5 mm

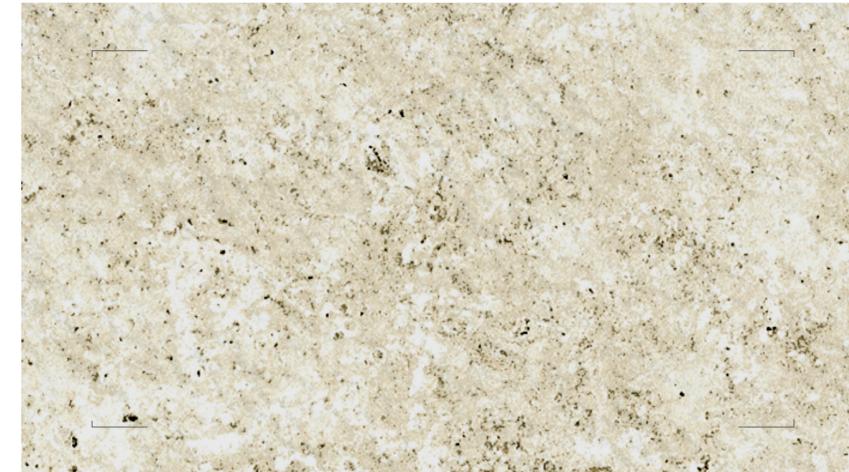


Cushion Edge WHITE

matt

Bleue

± 9,5 mm

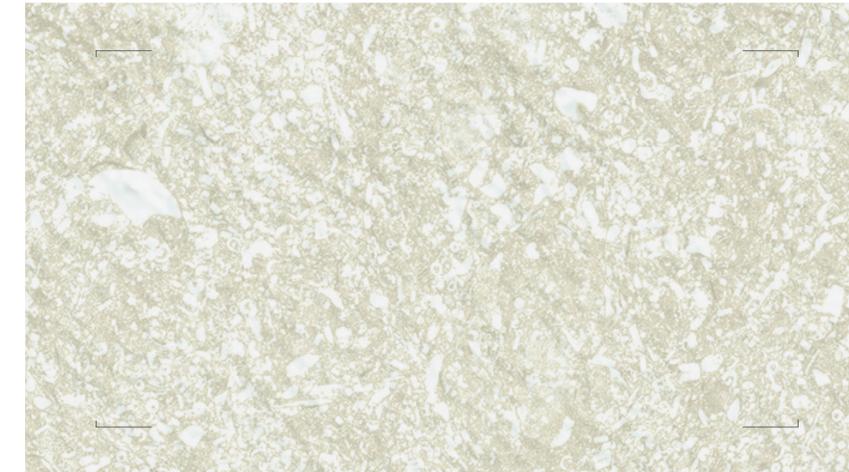


Cushion Edge LIGHT WHITE

matt




Cushion Edge GREY

matt

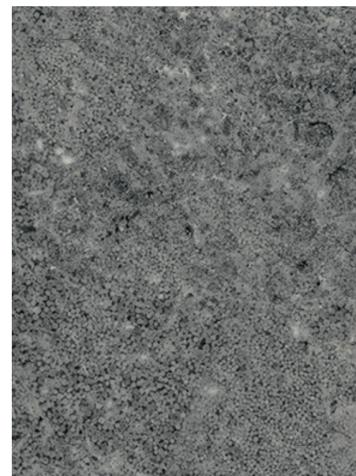

Cushion Edge BLACK

matt

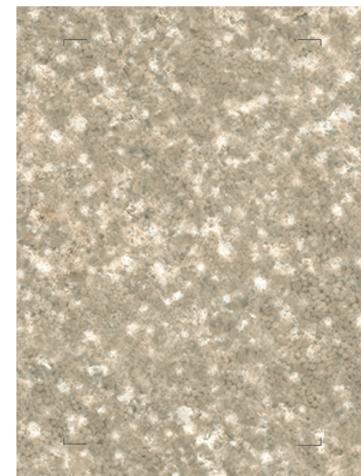


Flat Edge TAUPE

R10 matt




Flat Edge TAUPE

R11 ultra matt

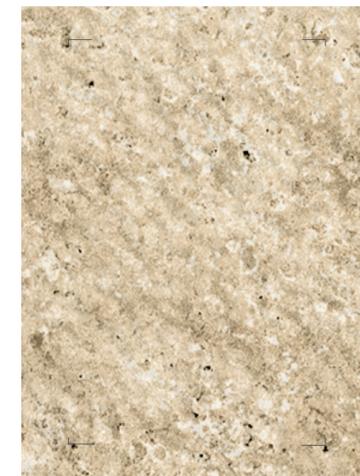

Cushion Edge NATURAL

matt

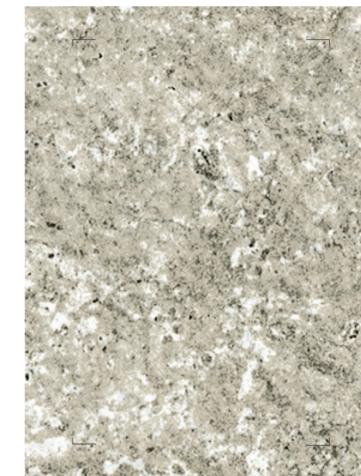


Cushion Edge GREY

matt



Cushion Edge GREY

matt

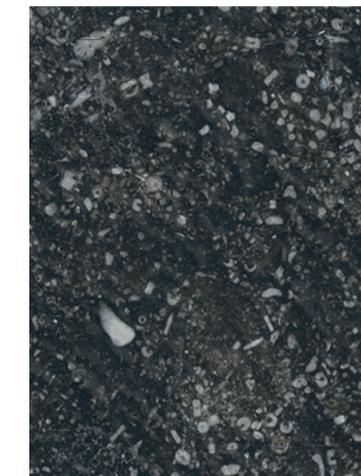

Cushion Edge BLUE

matt