



**ZIJTVELD**

# CE Operating and maintenance manual

Demolition and sorting grab  
Type S3004-ZD

**Dear User,**

The Demolition/Selector grab is a piece of equipment for excavators. The selector grab is available in various weights, capacities and versions and is always a fast and purpose- built selector and demolition device.

**It is imperative you read this manual and follow all the instructions given when working with our machinery in accordance with our recommendations.**

The Selector Grab products are provided with a CE marking, thereby complying with all the necessary European regulatory safety regulations.

It is essential to follow the safety regulations at all times.

These safety regulations refer to those laid out in this manual, including both the operating instructions for excavators and the safety regulations that apply to the vicinity in which the Selector grab product is being used, maintained and repaired.

Modifications made to the Sorting Grab may only be implemented with the written consent of the manufacturer. Only under these circumstances do the warranty conditions and CE liabilities remain applicable.

---

## Warning

---

- The excavator with a Selector Grab may only be operated by a qualified person.
- Maintenance and/or repairs may only be carried out by appropriately trained and competent personnel.
- Prevent dangerous work situations. Stay at a safe distance from moving parts.
- Ensure that whilst operating the machinery no other people are within the working vicinity of the excavator with selector grab.
- Maintenance or repair work must only be carried out when the engine is turned off.
- Refer to the safety regulations before starting on any maintenance or repair work.
- Replace defective parts only with original parts from the manufacturer.
- Failure to replace defective parts with original parts from the manufacturer will result in cessation of the entire warranty and CE liability.

| Content                                   | Page |
|-------------------------------------------|------|
| EU declaration of compliance              | 04   |
| Safety regulations                        | 05   |
| Conditions of guarantee                   | 06   |
| Operation                                 | 07   |
| Daily maintenance                         | 08   |
| Lubrication schedule                      | 09   |
| Exploded view                             | 10   |
| Part list 1                               | 11   |
| Parts list + exploded view cylinder left  | 12   |
| Parts list + exploded view cylinder right | 13   |
| Tightening Torques                        | 14   |
| Technical specifications                  | 15   |

® Zijtveld Grippers is a registered trademark of Zijtveld Grippers BV in 's-Graveland, the Netherlands. No part of this publication may be reproduced without the express prior permission of Zijtveld Grippers BV. All rights and modifications reserved.

# EU declaration of compliance



(Guideline 2006/42/EC)



Manufacturer      Zijtveld Grippers B.V.  
Address            De Boomgaard 1  
                         's Graveland

Hereby declares that Zijtveld Gripper®

|               |          |
|---------------|----------|
| Type          | S3004-ZD |
| Serial number |          |

meets all the required machine guidelines (Guideline 2006/42/EC, as most recently updated) as well as national legislative implementation of this directive.

Attention: Any adjustment that is made to this product without written consent on the manufacturer, makes this declaration void and invalid.

We should draw your attention to the fact that the selector grab product is designed to be assembled with another machine, and that the product, on the grounds of the machine Guide Line, can only be used once the whole machine is in accordance to the conditions laid down by European regulations.

Date

.....

(signed)

The Selector Grab should always be attached to an excavator of the correct weight, class and capacity of machine. Refer to the data information plate on the grab and consult the technical specifications in this manual. When in doubt contact the supplier.

The weight of the grab, increased by the weight of the load being picked up, must never exceed the maximum allowance of lifting power. For further information consult the excavator manual.

It is prohibited for people to be within the rotation range of the machine and grab. Keep in mind that material being lifted that extrude from the grab will enlarge the rotation range.

It is always possible that material can fall out of the excavator's grab. For this reason, never rotate the machinery above people, machines nor vehicles.

Always pick up a long load at its centre of gravity, to prevent the excavator from either rotating or tipping over. It is not permissible to use the grab to hit or pound.

Whilst connecting or disconnecting, lubricating or other maintenance work, the grab must be stable and on a flat surface. Before performing lubricating or other maintenance work the engine should always be shut down.

---

## Warning

---

Never work on the hydraulic system if the system is still under pressure! Keep hands away from moving parts at all times.

The manufacturer cannot anticipate every possible circumstance that might involve a potential hazard. The warnings in this publication are, therefore, not all-inclusive. If a tool, procedure, work method or operating technique that is not specifically recommended by the manufacturer is used, then you must assure yourself that it is safe for you and others.

You should also ensure that the product will not be damaged or made unsafe by the operation, lubrication, maintenance or repair procedures that you choose.

# Terms of guarantee

---



The manufacturer provides a warranty of 12 months from the date of delivery.

All defective parts proven to be caused by faults in either manufacture, production or material are covered by the warranty.

Defective parts that are replaced and fall under guarantee become property of the manufacturer. They must be kept available and returned immediately, in complete and unaltered condition, upon the first request from the manufacturer.

Any claim made under guarantee will only be taken into consideration once a written appeal is made to the dealer or manufacturer. This must be done directly after the damage or fault occurs and at least within 24 hours of any irregularities and problems arising.

All claims under conditions of the warranty must contain the following data; the type of machine the product has been mounted on, the serial number of the grab, the record of the defective part(s) and a description of the fault, photographs, copy of the delivery papers and invoice and a copy of the invoice of the piece of equipment concerned. Minor repairs can be carried out in consultation with the dealer; the necessary parts which fall under the warrantee, will be delivered without charge. For larger repairs the grab should be sent to your dealer or manufacturer for repairs or modifications. The work and necessary parts are free of charge. However, transport costs and call-out charges to and from your dealer or manufacturer are not covered.

The manufacturer is not liable for consequential loss caused by a defective Selector Grab (consequential loss to excavators, consequential loss due to a stationary excavator or the suspending of work activity).

## **EXCLUDED FROM GUARANTEE:**

- Damage caused by faulty assembly of a machine and or the hydraulic system, improper maintenance without expertise and transport damage.
- Defects resulting from improper repairs and/or maintenance including that carried out by an unauthorised third party.
- Defects arising from neglect or improper execution of preventive maintenance procedures e.g. regular lubrication or greasing.
- Defects to parts which are subject to normal wear like blades.
- Consequential loss caused by failure to replace normal wearing parts in time.

**N.B.** If defective or worn down parts are replaced by non-original parts, the entire warranty and liability will cease to apply.

## Procedures to follow before initial use

---



Before taking the machine into operation and to ensure the good functioning of the apparatus, it is important that the following points are checked and correspond to the technical specifications as shown on the information plate and in the manual.

- The type and weight of the sorting grab must conform to weight and machine class of the intended excavator.
- The oil flow and the pressure for rotating the selector grab should be checked and adjusted.
- Beware: the return pressure of the rotating oil at a continuous level may be at a maximum of 25 bar, and only briefly (maximum of 10% of the working time) at 100 bar.
- The oil flow and pressure of the pinching (opening and closing) of the sorting grab needs to be controlled and adjusted.
- Check if the hydraulic quick release hitch is in good order and screwed on firmly.
- Check if the ball valves and valves are in the correct position.
- Check if the connecting pins between the excavator and the sorting grab are well secured, as well as the wedge and the security pin of the quick release hitch system.
- Ensures that the hoses have the correct length and are at no risk of interfering with any of the moving parts. Also make sure they cannot wear or damage because of contact with the grab or material that is moved by the grab.


For maintenance work, always place the grab in open position on a flat and stable surface and ensure the excavator cannot move.

During maintenance on the hydraulic system the hydraulic hoses need to be disconnected. Before disconnecting ensure there is no pressure on the hoses. Consult the manual for the excavator.

The grab must be lubricated once every 8 operating hours with the same lubricant recommended for the excavator. For the position of the grease nipples and frequency of lubrication, see the schedule on page 9.

When the cutting blades of the grab shells are worn down to such a degree that the grab can no longer close fully, all work should be suspended immediately and the exchangeable wear blades must be changed or replaced (Note that the wear blades also function as final stop of the cylinder—neglect or excessive wear can lead to damage).


Picture 1 and 2 : Instructions for assembling the wear blades.

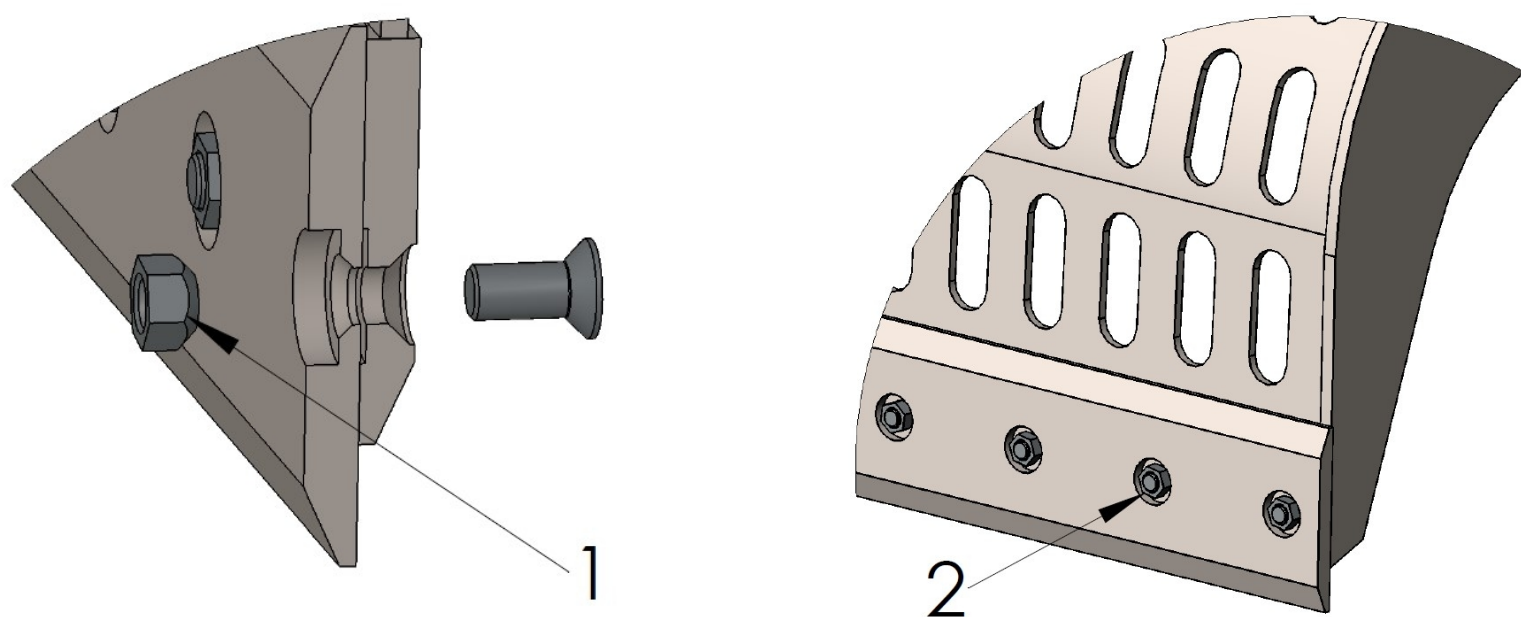

1 = Attention: fix nut with the conical side to the inside.


2 = Bolts need to be tightened with a torque as shown in the table (see page 16).

To ensure the wear blades are securely fastened to the shell it is recommended to place some additional spot welding between knives and shell base.

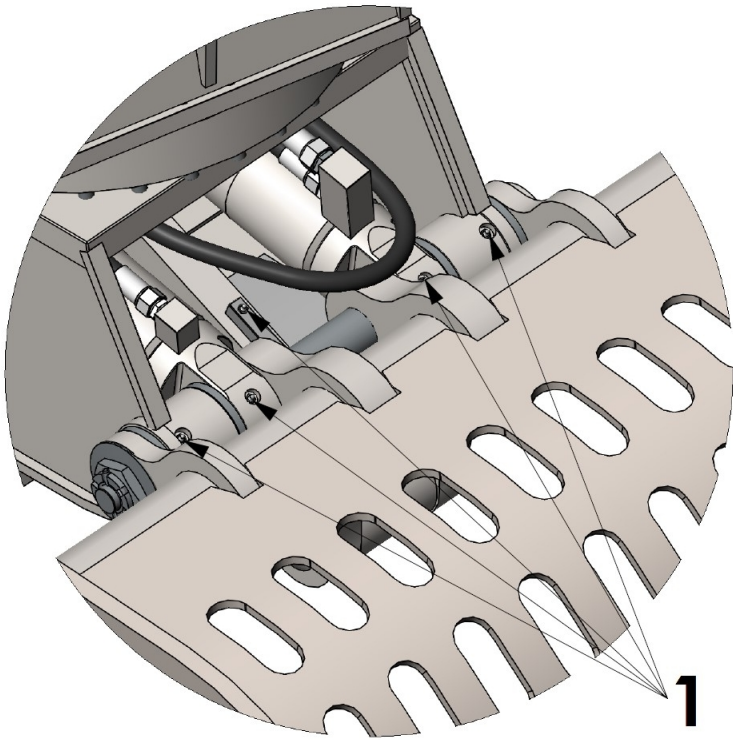

Picture 3: Lubricating pivoting points


1 = Lubricate 1 x per 8 operating hours.

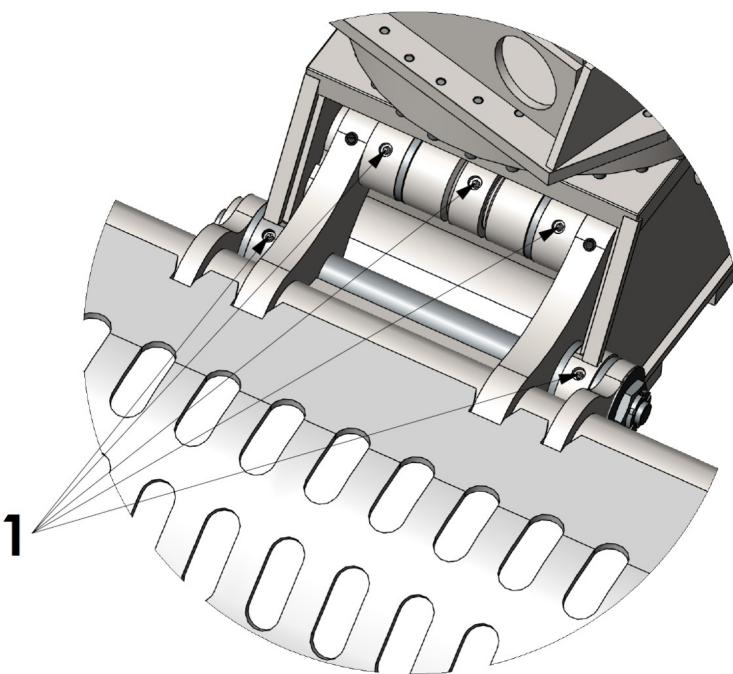

Picture 4: Lubricating pivoting points

1 = Lubricate 1 x per 8 operating hours.

# Exploded view S3004-ZD

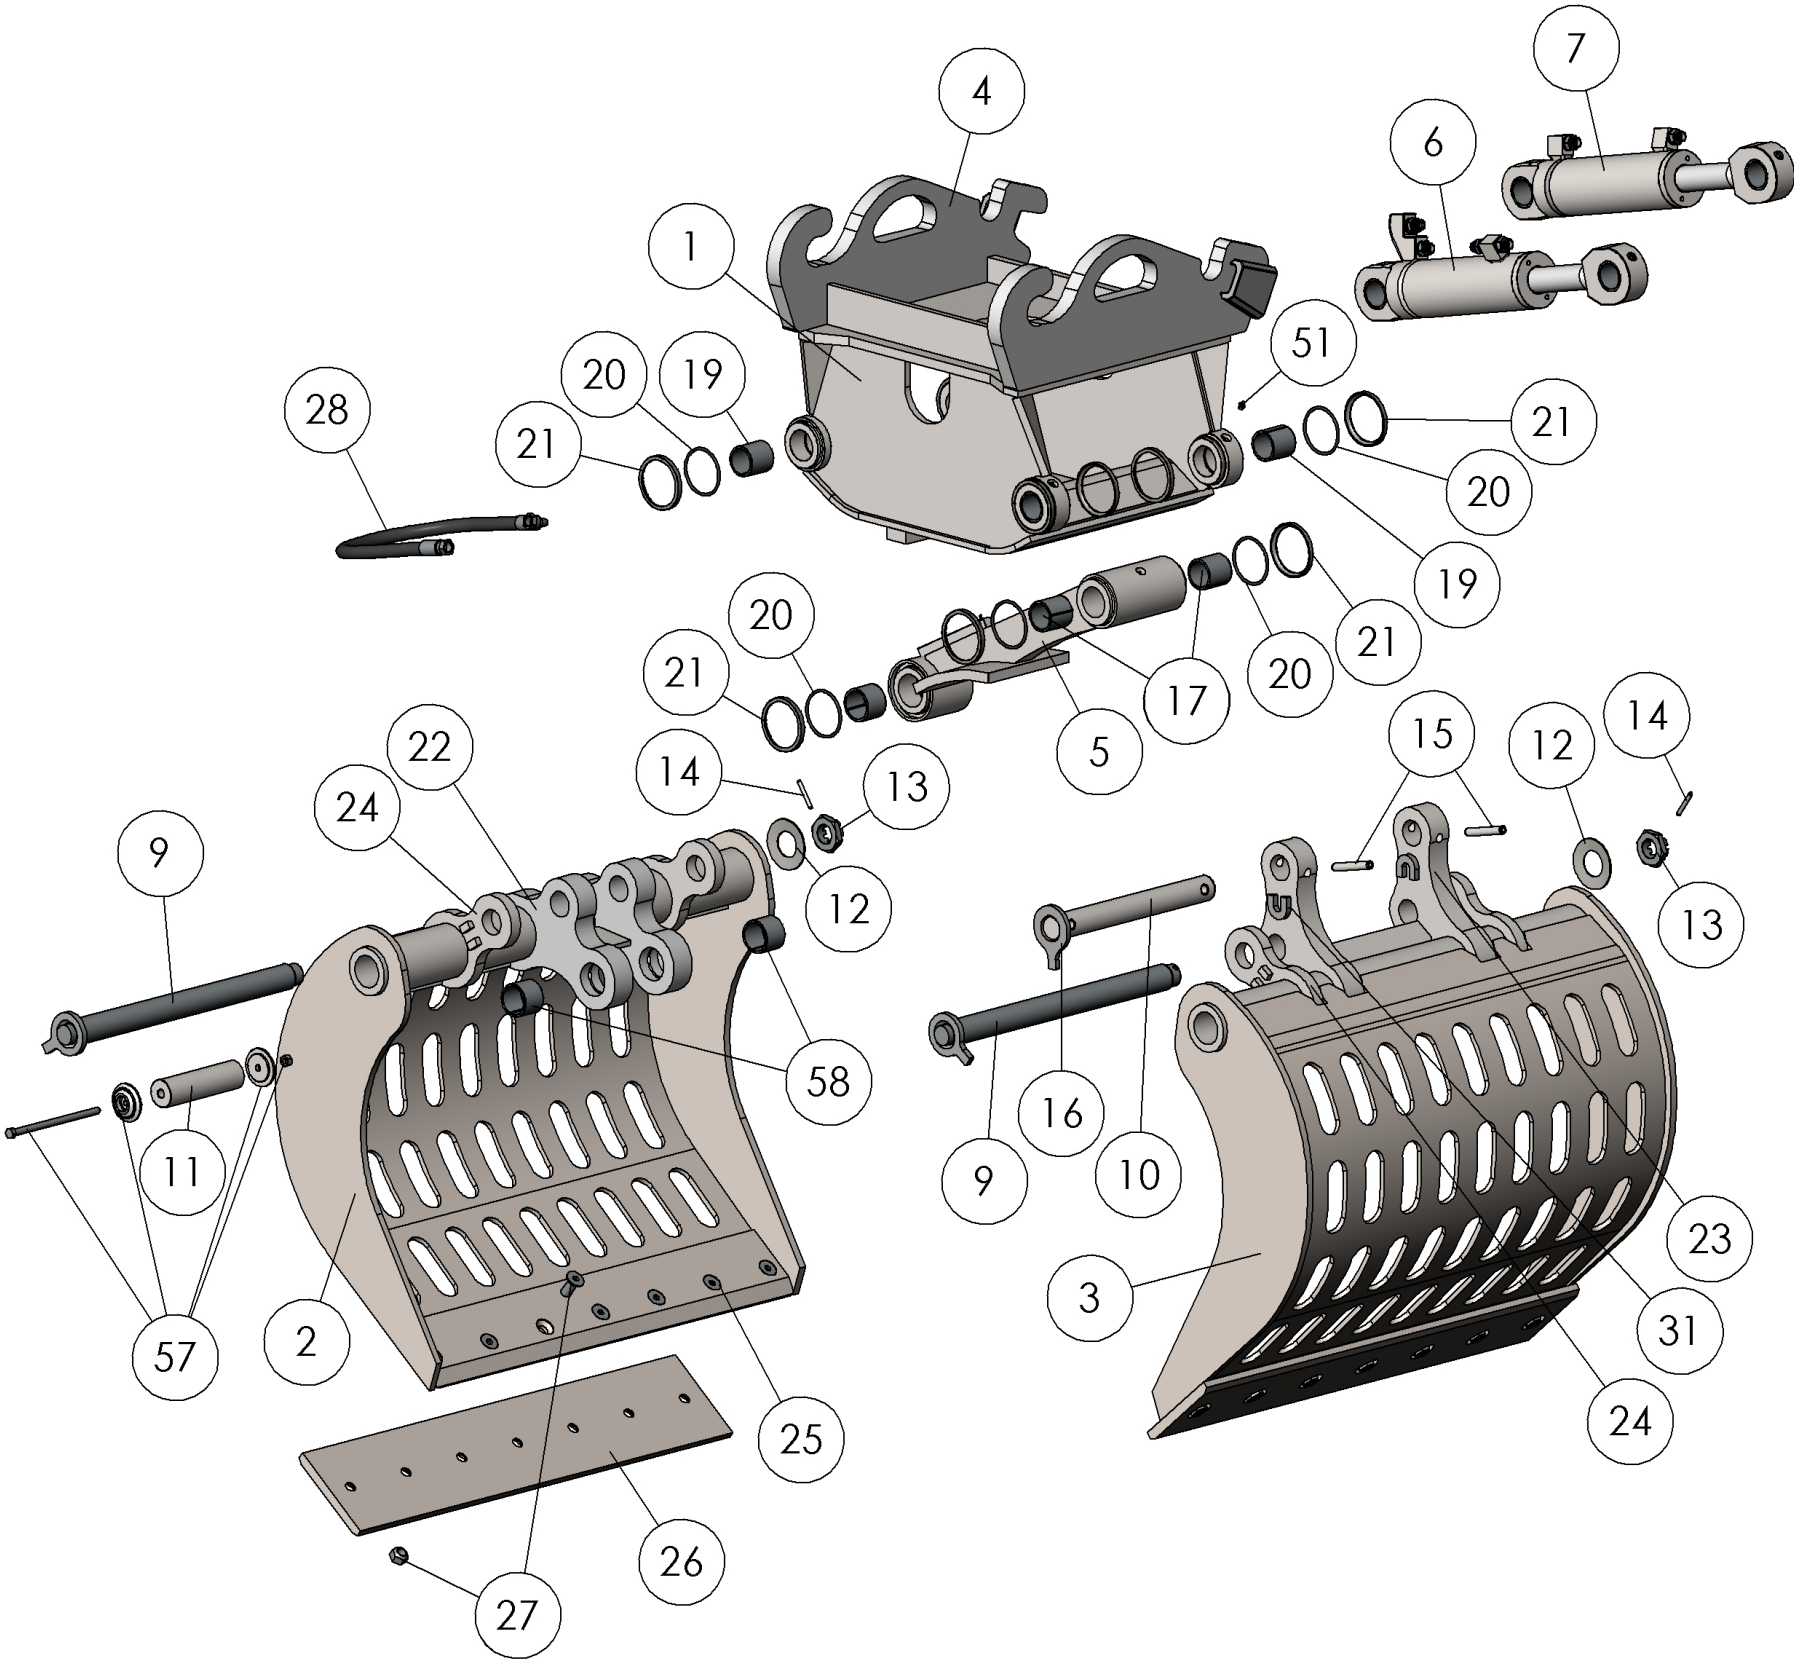

# Parts list S3004-ZD




| Part No. | Qty   | Description                    | Order part No. |
|----------|-------|--------------------------------|----------------|
| 1        | 1     | Welded main frame construction | S3004D.001     |
| 2        | 1     | Left shell (short ear)         | S3004D.002     |
| 3        | 1     | Right shell (long ear)         | S3004D.003     |
| 4        | 1     | Welded head construction       | S3004ZD.004    |
| 5        | 1     | Welded linkage construction    | S3004D.005     |
| 6        | 1     | Hydraulic cylinder right       | S3004D.006     |
| 7        | 1     | Hydraulic cylinder left        | S3004D.007     |
| 9        | 2     | Main hinge pin                 | S3004D.009     |
| 10       | 1     | Linkage shaft                  | S3004D.010     |
| 11       | 1     | Linkage shaft                  | S3004D.011     |
| 12       | 2     | Disc spring                    | S3004D.012     |
| 13       | 2     | Castellated nut                | S3004D.013     |
| 14       | 2     | Dowel pin                      | S3004D.014     |
| 15       | 4     | Locking pin                    | S3004D.015     |
| 16       | 2     | Locking flap linkage pin       | S3004D.016     |
| 17       | 2     | Bearings linkage top           | S3004D.017     |
| 18       | 2     | Bearings linkage bottom        | S3004D.018     |
| 19       | 4     | Bearings main frame            | S3004D.019     |
| 20       | 12    | O-ring metal seal              | S3004D.020     |
| 21       | 12    | Metal seal                     | S3004D.021     |
| 22       | 2     | Shell ear short                | S3004D.022     |
| 23       | 2     | Shell ear long                 | S3004D.023     |
| 24       | 4     | Shell ear support              | S3004D.024     |
| 25       | 2     | Fixed blade                    | S3004D.025     |
| 26       | 1 set | Cutting edge (underside)       | S3004D.026     |
| 27       | 1 set | Bolt set replaceable blades    | S3004D.027     |
| 28       | 1 set | Hose kit underframe            | S3004D.028     |

# Parts list cylinder left S3004-ZD

| Part No. | Qty   | Description                 | Order part No. |
|----------|-------|-----------------------------|----------------|
| 101      | 1     | Cylinder housing            | S3004D.101     |
| 102      | 1     | Piston rod                  | S3004D.102     |
| 103      | 1     | Cylinder nut                | S3004D.103     |
| 104      | 1     | Cylinder piston             | S3004D.104     |
| 105      | 2     | Bearing (cylinder housing)  | S3004D.105     |
| 106      | 1     | Bearing (cylinder nut)      | S3004D.106     |
| 107      | 1 set | Cylinder seal kit           | S3004D.107     |
| 108      | 1     | Secure bolt M8x12           | S3004D.108     |
| 109      | 1     | Secure bolt M6x6            | S3004D.109     |
| 110      | 1 set | Cylinder nipple set (2 pcs) | S3004D.110     |


# Exploded view cylinder left S3004-ZD

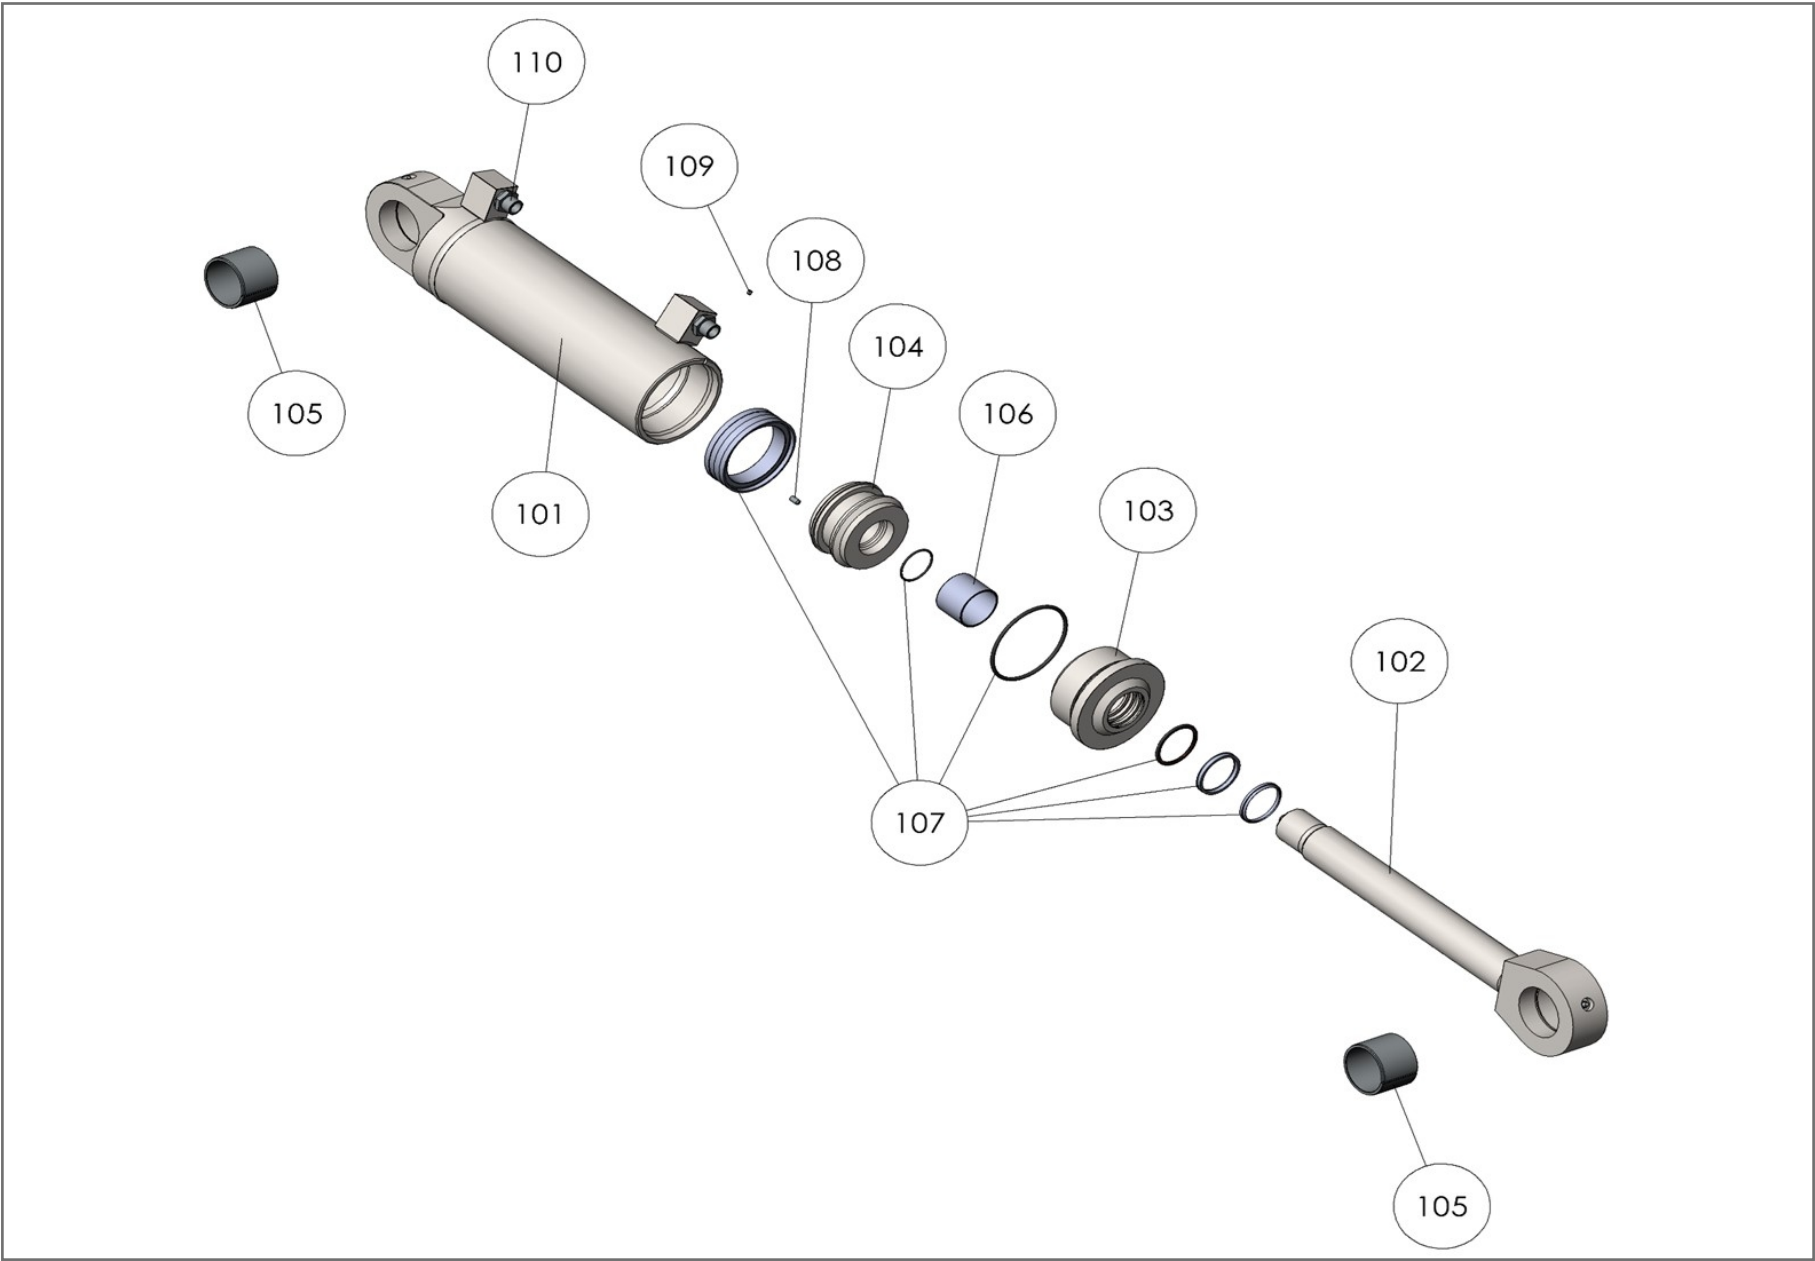

# Parts list cylinder right S3004-ZD

| Part No. | Qty   | Description                 | Order part No. |
|----------|-------|-----------------------------|----------------|
| 102      | 1     | Piston rod                  | S3004D.102     |
| 103      | 1     | Cylinder nut                | S3004D.103     |
| 104      | 1     | Cylinder piston             | S3004D.104     |
| 105      | 2     | Bearing (cylinder housing)  | S3004D.105     |
| 106      | 1     | Bearing (cylinder nut)      | S3004D.106     |
| 107      | 1 set | Cylinder seal kit           | S3004D.107     |
| 108      | 1     | Secure bolt M8x12           | S3004D.108     |
| 109      | 1     | Secure bolt M6x6            | S3004D.109     |
| 111      | 1 set | Cylinder nipple set (2 pcs) | S3004D.111     |
| 112      | 1     | Cylinder housing            | S3004D.112     |

# Exploded view cylinder right S3004-ZD

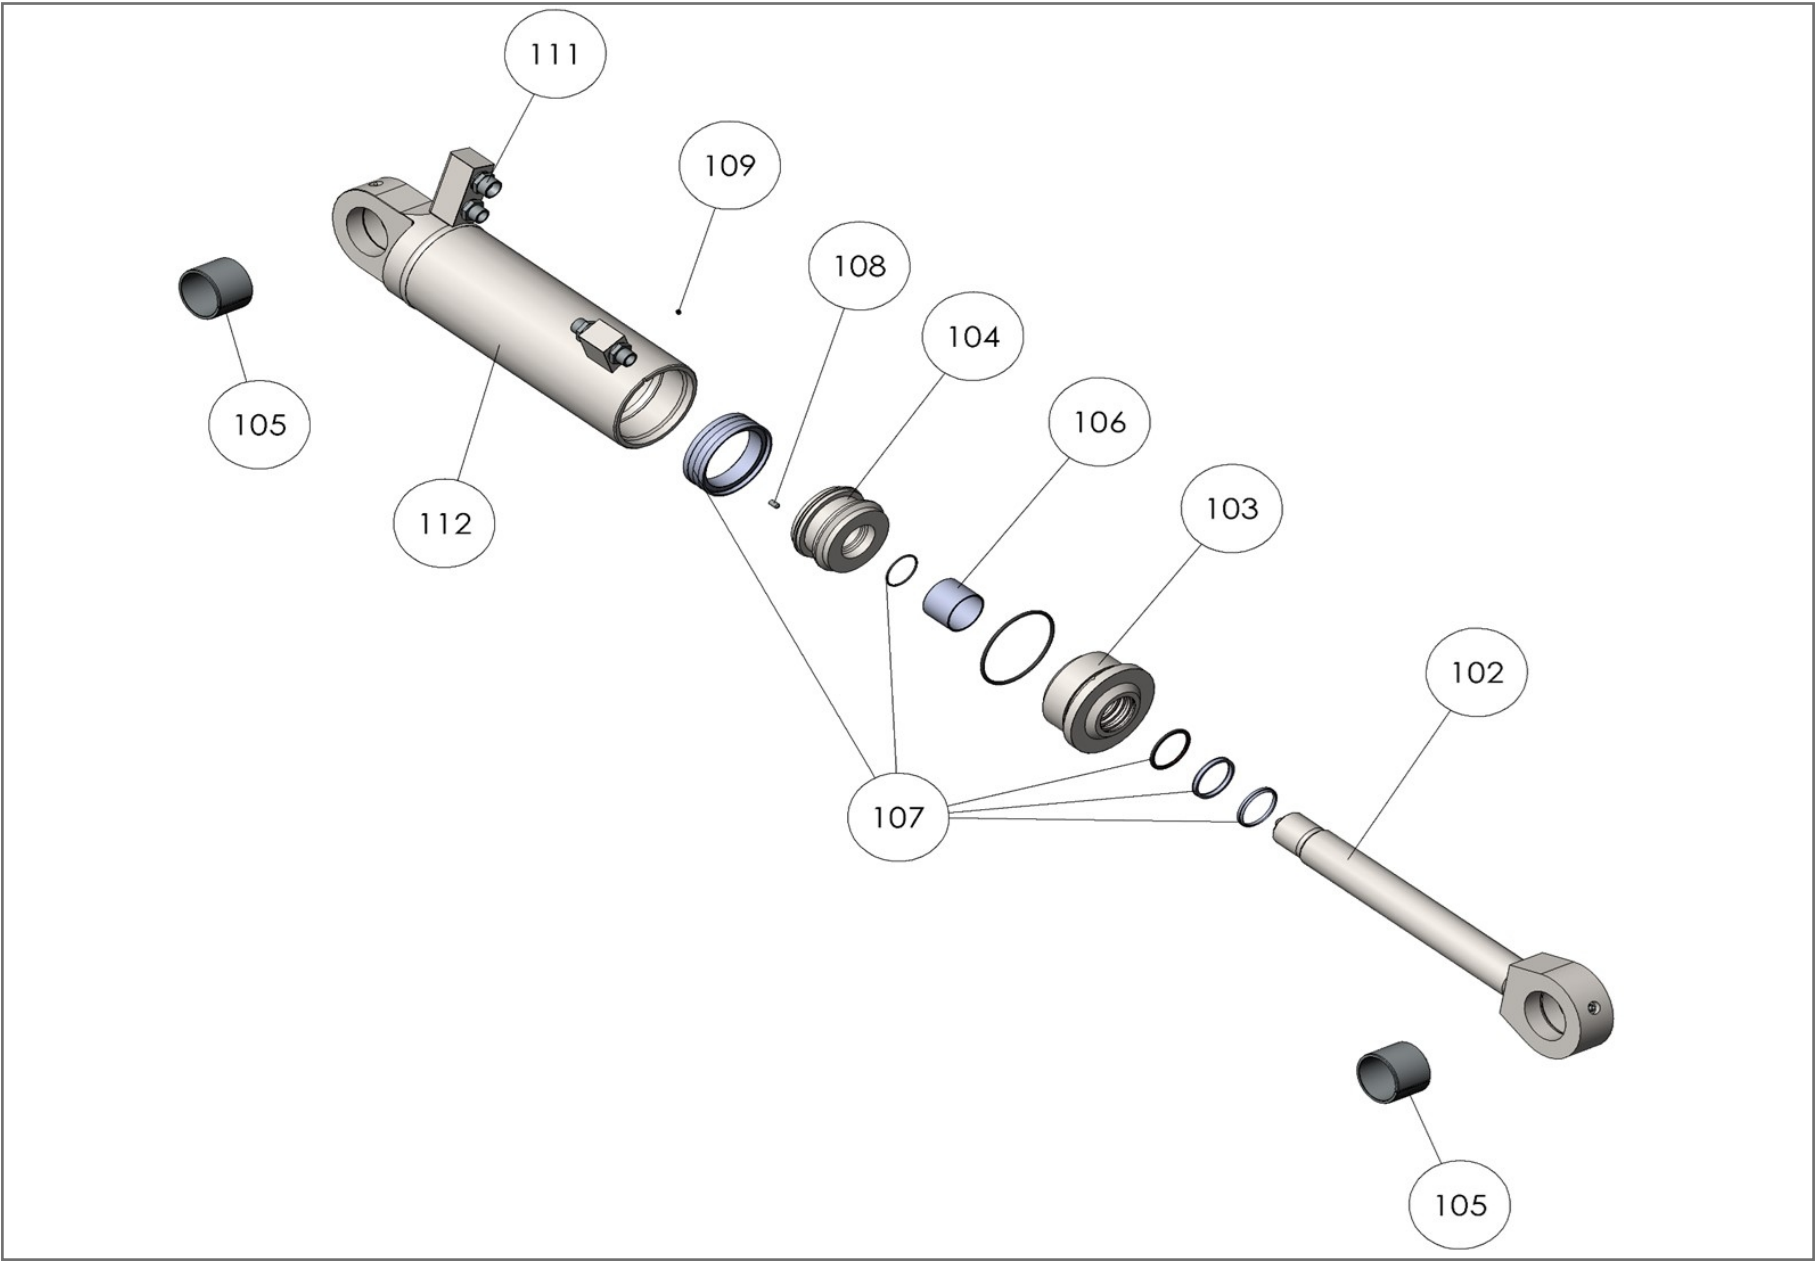

# Torques specification



Maximum torque specified to bolts on the cutting blades and rotator of the demolition and sorting grab.

Please consult this listing on diameter, pitch and metric size and maximum torque specified prior to fastening.

| Bolt size | Torque (Nm) | Torque (Kg/m) |
|-----------|-------------|---------------|
|           | Bout 10,9   | Bout 10,9     |
| M8        | 40 Nm       | 4 Kgm         |
| M10       | 80 Nm       | 8 Kgm         |
| M12       | 130 Nm      | 13 Kgm        |
| M12x1,25  | 110 Nm      | 11 Kgm        |
| M14       | 200 Nm      | 20 Kgm        |
| M16       | 300 Nm      | 30 Kgm        |
| M20       | 600 Nm      | 60 Kgm        |
| M24       | 1000 Nm     | 100 Kgm       |
| M27       | 1500 Nm     | 150 Kgm       |
| M30       | 2000 Nm     | 200 Kgm       |
| M36       | 3600 Nm     | 360 Kgm       |
| M39       | 4600 Nm     | 460 Kgm       |

Note ,fine pitch.

# Technische specificaties: S3004-ZD



|                         |        | S3004-ZD |
|-------------------------|--------|----------|
| Weight class excavator  | ton    | 35-50    |
| Weight                  | kg     | 2400     |
| Operating pressure max. | bar    | 350      |
| Oil flow max.           | l/min. | 200      |
| Shell width             | mm     | 1500     |
| Width opened            | mm     | 2450     |
| Height opened           | mm     | 1485     |
| Capacity                | ltr    | 1300     |
| Closing force           | Kn     | 90       |