



SPEED QUEEN® ON-PREMISES LAUNDRY SOLUTIONS

Tumble Dryer

ST120

| ST170

| ST200

Features and Benefits

- Standard galvanized drum
- Large door opening for easy loading & unloading
- Self cleaning lint screen
- Unique drum supporting system
- Standard frequency inverter drive
 - Soft start/stop
 - Decreased operational noise
 - Increased unit lifespan
- Enclosed back for easy access to all rear mounted parts
- Easy serviceability and diagnostics
- High performance heating
- Reversing: prevents linen from tangling
- Fire suppression system: for maximal safety of your operations

Control

- Easy - To - Use Microprocessor - Dual Digital Control or OPL Micro




Tumble Dryer

		ST120	ST170	ST200
CAPACITY				
Capacity 1:18	kg (lb)	57(126)	79(172)	93(203)
Capacity 1:22	kg (lb)	47(102)	65(141)	76(166)
Drum volume	l	1020	1410	1660
Drum diameter	mm	Ø 1120	Ø 1290	Ø 1290
AIRFLOW	l/sec	600	1010	1010
MOTORS				
Fan	kW	1,1	1,1	1,1
Drive	kW	1,1	1,1	1,1
NOISE LEVEL	dBA	60	69	69
GAS HEATING				
Gas connection	NPT	1"	1"	1"
Electrical connection				
Energy	kW	79,3	116,4	125,4
	kBTU/h	270	395	425
STEAM HEATING				
Steam connection	NPT	3/4"	3/4" (1" outlet)	3/4" (1" outlet)
Electrical connection				
Steam pressure	bar	5,3 - 6,9	5,3 - 6,9	5,3 - 6,9
ELECTRICAL HEATING				
Electrical connection				
Energy	kW	60	-	-
EXHAUST	mm	254	305	305
DIMENSIONS				
H*W*D	mm	2175x1180x1725	2390x1350x1775	2390x1350x1900
Net weight	kg	555 - 605	635 - 705	705 - 770
TRANSPORT DATA				
Packed H*W*D	mm	2290x1220x1820	2510x1320x1870	2510x1320x2070
Gross weight	kg	585 - 635	670 - 740	740 - 805

	A	B	C	D	E	F	G	H	I*	J*	K*	Y	Z
ST120	800	825	1180	1270	1725	1180	2175	1785	730	770	1475	195	195
ST170	860	825	1125	1315	1775	1350	2390	1905	835	875	1545	225	280
ST200	860	825	1420	1505	1900	1350	2390	1905	835	875	1545	225	280
					D	W	H						

*Fire suppression system optional - may not be on machine.

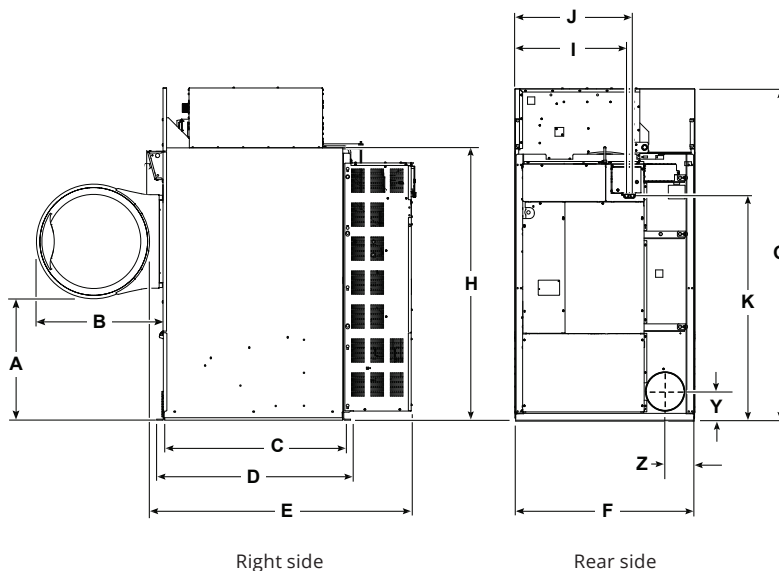

Please note that the models shown and nomenclature provided are based on a product family. Individual models may have different naming for regional certification requirements but the machine remains the same. This also extends to the model name and type shown on serial plates.