

CCXLE SERIES LED COMBINATION

Thermoplastic LED Exit Sign/Emergency Light Combo
CCXLE series model is a slim-profile thermoplastic LED exit sign/emergency light combo that offers modern design, including a standard flat faceplate, long-lasting and energy-efficient LEDs, an innovative LED lamp head and uniform illumination in an economical package.

FEATURES


- Dual-voltage input 120V/277V.
- Maintenance-free nickel-cadmium battery and RC/RCSD versions
Maintenance-free nickel-metal hydride battery.
- Energy-saving LED.
- Optional Self-Diagnostic version monitors battery/charger failure, battery disconnect and lamp failure.
- Optional Remote-Capable version offers up to an additional 3.44 Watts for 90 minutes.
- Two factory-installed fully adjustable, glare-free LED lighting heads in round or square style.
- Injection-molded, high-impact, UV-stabilized, UL94 V-0 thermoplastic construction in white or black finish.
- Snap-fit faceplate design for installation without tools.
- Removable universal chevrons for directional indications.
- Top, back or J-box mounting through universal mounting plate and canopy.
- Universal single face and double face (extra faceplate included).
- Temp rating: 20°-30° damp.
- DOE and CEC Registered.
- UL 924 Listed for damp location.
- CUL Listed.
Master Carton Quantity 6pc.

LUMEN OUTPUT

- **TOTAL LUMENS:**
 - Standard: 60
 - High Output: 126
 - Square: 82



DIMENSIONS

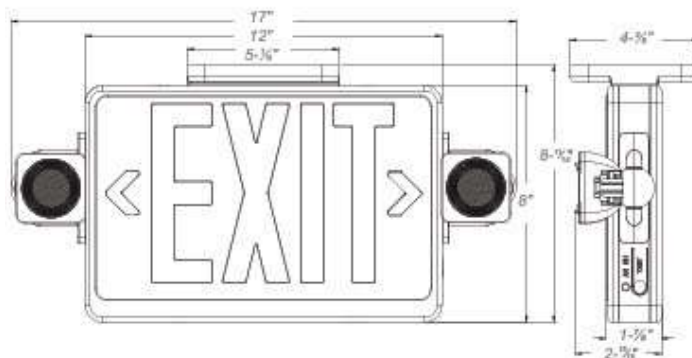

ORDERING GUIDE

CCXLE
OPERATION:
- B= Battery Backup
NUMBER OF FACES:
- 1= Single face
- 2= Double Face
LETTER COLOR:
- R= Red
- G=Green
FINISH:
- W= White
- B= Black
LAMP HEAD OUTPUT:
- Blank = Standard 8 LED ²
- H = High-Output 12 LED
LAMP HEAD STYLE:
- Blank = Round
- Q = Square
OPTIONS:
- SD = Self Diagnostic ¹
- RC = Remote capable ¹
Notes*
• 1- Options may be combined.
• 2- Standard 8 LED option for round head only