
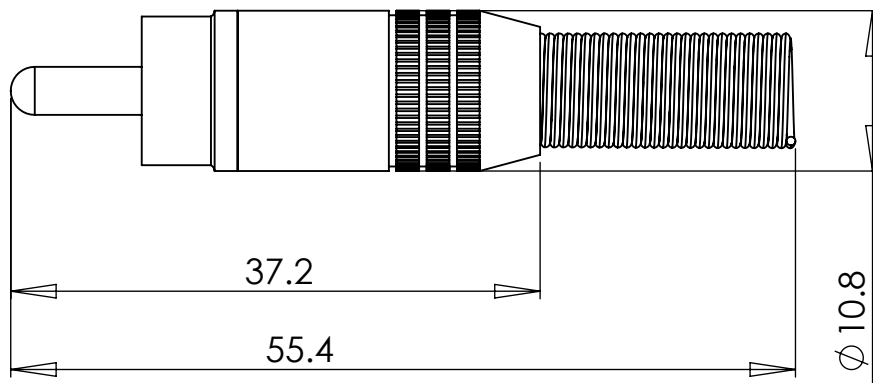


A RANGE OF HIGH QUALITY PHONO PLUGS MADE FROM MACHINED BRASS, NICKEL PLATED

- CENTRE CONTACT, SOLID PIN
- GROUND CONTACT WITH 'T' SHAPE SLOT FOR MAXIMUM CONTACT AREA
- SPRING STRAIN RELIEF
- COLOUR CODE ID RINGS AVAILABLE IN RED AND BLACK

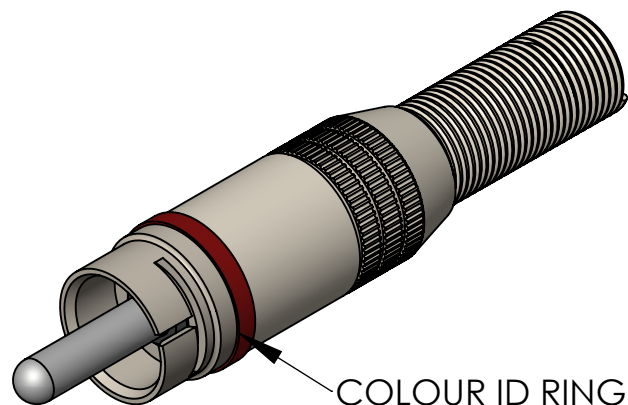

MATERIAL PROPERTIES

PART	MATERIAL	FINISH
CENTRE CONTACT	BRASS	SILVER
GROUND CONTACT	BRASS	NICKEL
INSULATION	NORYL SE1	
CABLE CLAMP	BRASS	SILVER
SPRING	SPRING STEEL	NICKEL PLATE
CAP	BRASS	NICKEL PLATE
ID RING	ACETAL	RED OR BLACK

ELECTRICAL PROPERTIES

RATED CURRENT		5A
RATED VOLTAGE		50 V
INSULATION RESISTANCE		100M W at 500 VDC
MAXIMUM CABLE SIZE		5.5mm

TEMPERATURE PROPERTIES

ACETAL, DELRIN, 500P BK602	ID RING	RTI 105°C CTI 600V, UL94-HB CLTE -40°C to 23°C 9.0E-5cm/cm°C
NORYL RESIN SE1		RTI 110°C CTI 400V, UL95-V1 CLTE -40°C to 40°C 8.0E-5cm/cm°C

PART No	FINISH	COLOUR ID
333-0000	Nickel Plate	NONE
333-0100	Nickel Plate	Black
333-0500	Nickel Plate	Red