


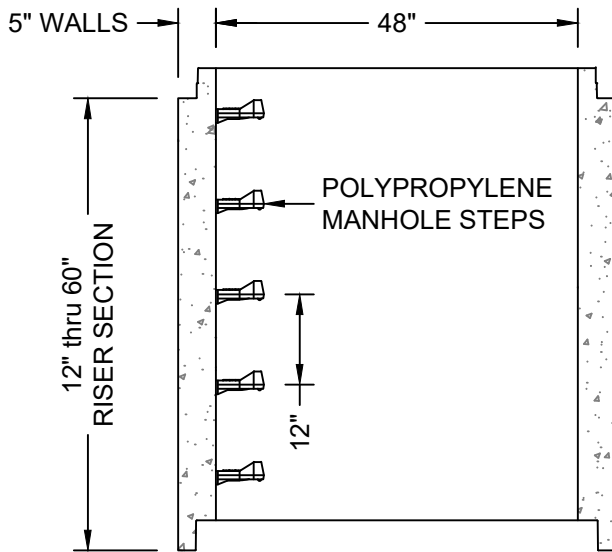


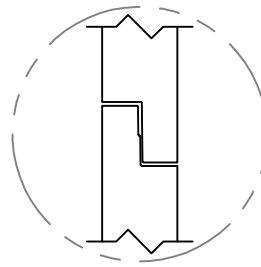


RISER SECTION

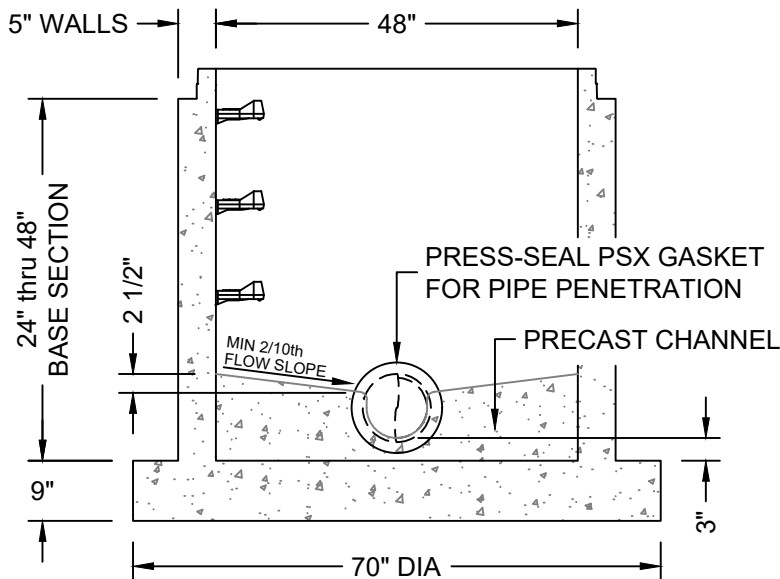


**JOINT DETAIL
(2x SCALE)**

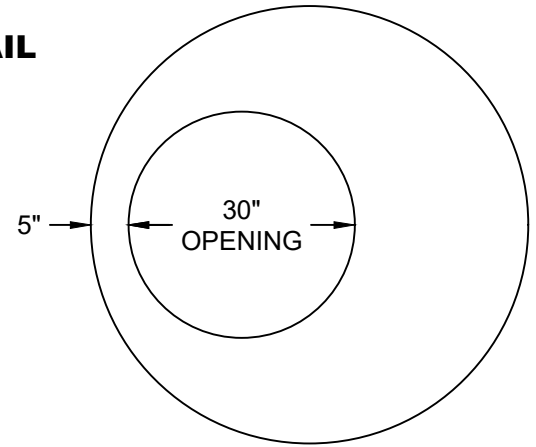

BASE SECTION

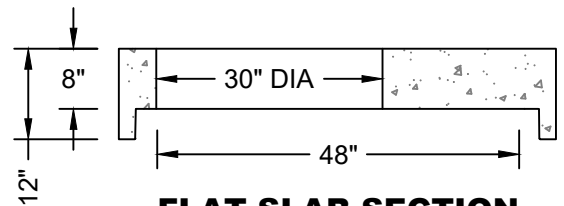

FLAT SLAB SECTION

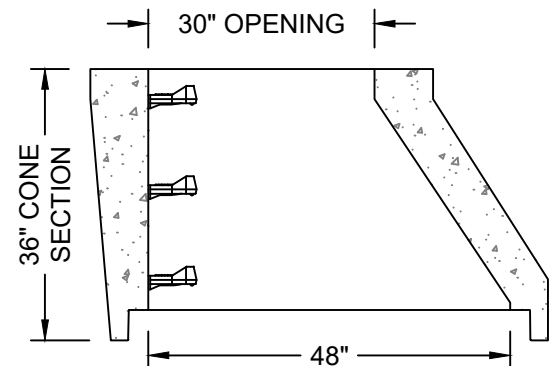

CONE SECTION

NOTES:

- CONCRETE IS DESIGNED FOR 5000 PSI AT 28 DAYS
- MANHOLE CONFORMS TO ASTM C478 and PENNDOT RC-39 SPECIFICATIONS
- MANHOLE IS DESIGNED FOR HS-25 LOADING
- EXTERIOR COATED WITH CONSEAL CS-55 WATER BASED ACRYLIC SEALANT
- PRESS-SEAL PSX GASKETS INSTALLED FOR PIPE PENETRATIONS

OPTIONS:

- EXTERIOR PIPE DROP WITH EXTENSIONS
- DOGHOUSE OPENINGS FOR EXISTING PIPES

JOB #:		FORM ID:	
DRAWN BY: RF	CHK BY:	DWG SCALE: FULL	
	CHK'D DATE:	PLOT SCALE: PLOT TO FIT	
DWG FILE: SANITARY - 48 DIAMETER			
REVISIONS		DATE	BY



Deihl Vault & Precast, Inc.
1786 State Route 254, Orangeville, Pa 17859
www.deihlprecast.com

DESCRIPTION:

**48" DIA SANITARY MANHOLE
WITH 9" EXTENDED BASE**

DISCLOSURE:

This drawing is the sole property of Deihl Vault & Precast, Inc. It is furnished with the understanding that usage is limited to authorization at the time of transmittal. This drawing is not to be modified or transmittal. This drawing is not to be modified or copied without written permission.