



TRACKED CONE CRUSHER STRIKER CQR400

TECHNICAL SPECIFICATION





STRIKER CQR400 - TECHNICAL SPECIFICATION

Feeder

Capacity - 5m³ / 7m³ [6yd³ / 9yd³] Width - 1200mm [3'11"]

Crusher

Size - 1200mm [48"]

Forward Product Conveyor

Width - 1200mm [3'11"] Discharge Height - 2443mm [8']

Screen

Size - 3200mm x 1500mm (11' x 5') - Single Deck

Tracks

Length - 3840mm [12'7"] Width - 400mm [1'4"]

Power Pack

Engine Power - 315 kW Hyd. Tank - 600Litre (132gal)
Diesel Tank - 840Litre (185gal)

Performance

Capacity (up to) - 400T/hr Gap Setting - 10-50mm [0.39"-2"]

Operating Dimension

Length - 17686mm [58'] Height - 4973mm [16'4"]
Width - 4091mm [13'5"] Weight - 52T (114,640lbs)

Transport Dimension


Length - 18727mm [61'5"] Height - 3766mm [12'4"]
Width - 3514mm [11'6"]

STANDARD EQUIPMENT

- Cone
- Belt Feeder
- Feed Hopper
- Forward Product Conveyor
- Screen
- Screen To Cone Transfer Conveyor
- Track Frame
- Power Pack - CATERPILLAR model C13 engine

OPTIONS

- Hardox hopper liners, water pump for dust suppression, 3mtr air intake snorkel kit, auto zero set cone gap adjustment, hydraulic stacker outlet, radiator blast guards, plant lighting, umbilical remote, dual drive on conveyor, control panel pressuriser, higher & wider track kit.

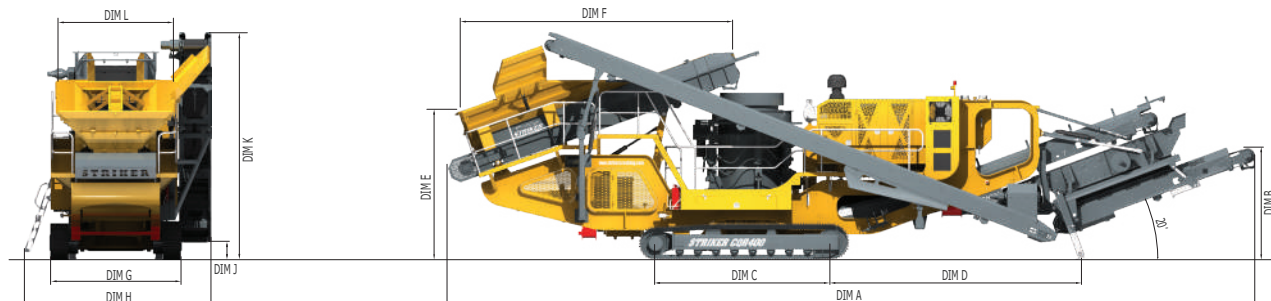

	WORKING DIMENSIONS											TRANSPORT			
CQR400	A	B	C	D	E	F	G	H	J	K	L	WIDTH	HEIGHT	LENGTH	WEIGHT
METRIC	17686	2443	3840	5500	3264	5992	2860	4091	397	4973	2500	3514	3766	18727	52T
IMPERIAL	58'	8'	12' 7"	18' 1"	10' 9"	19' 8"	9' 5"	13' 5"	1' 4"	16' 4"	8' 2"	11' 6"	12' 4"	61' 5"	114,640lbs

* - Weight Variable With Options

While Striker Australia Pty Ltd makes every endeavour to ensure of the information presented in this brochure, we cannot be held liable in any way for any loss or damage for any inaccuracies or errors you may find. Striker Australia Pty Ltd cannot make any warranty as to the fitness of purpose of any goods, equipment or material in this brochure for your purposes and you must use your own endeavours and make your own enquiries in that regard.

SP02SI63-2500