

Star Baths Signature Bath



The Star Baths Signature Bath is a handcrafted, freestanding outdoor bath designed for residential and commercial accommodation use. Built as a complete insulated unit, it is engineered for durability, thermal performance, and long-term outdoor exposure in New Zealand conditions.

Brand	Star Baths
Colour	Moonstone White
Finish	Gloss
Installation	Freestanding
Material (Bath Vessel)	Fibreglass composite with gelcoat finish

Star Bath Assembly (Complete Unit) Each Star Bath is supplied as a complete assembled unit comprising:

- Fibreglass composite bath with gelcoat finish
- Duragalv steel support frame
- NZ wool insulation
- Expol rigid insulation
- Breathable building paper wrap to protect insulation from moisture and environmental exposure
- Exterior cladding (selected finish) or nude (no cladding)
- Integrated plinth base




Dimensions

Total Star Bath Unit (including cladding and integrated plinth)	Length	2075 mm
	Width	1080 mm
	Height	735 mm

The integrated 45 mm plinth base elevates the bath, provides ground clearance, and supports levelling and drainage.

Internal Bath Dimensions (Bathing Area)	Top Length	1680 mm
	Top Width	710 mm
	Bottom Length	1140 mm
	Bottom Width	450 mm

Weight & Capacity	Dry weight	165 kg
	Water capacity	220 L
	Filled weight (no occupants)	385 kg
	Typical loaded weight (bath, full water capacity, two adults)	approx. 565 kg

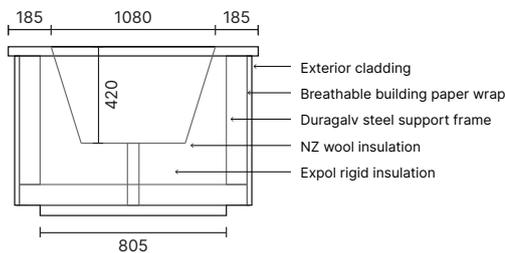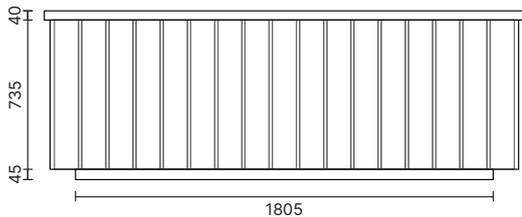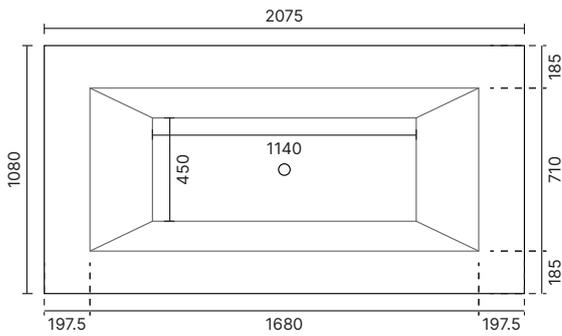

Star Baths Signature Bath

Orientation	The Star Bath has no handedness or fixed orientation. It may be positioned freely on site, subject to plumbing and tapware layout.
Overflow	No
Waste	Waste size 40 mm Waste included No (available as optional add-on) Waste and drainage method must comply with local plumbing and environmental requirements.
Tapware Requirements	<i>Star Baths are not designed for tapware to be affixed directly to the bath.</i> <ul style="list-style-type: none">Tapware must not be drilled into or mounted through the bath shell or bath ledgeTapware must be independently supportedThe faucet outlet must extend beyond the inner edge of the bath ledge
Bath Ledge Depth	190 mm
Compatible Tapware Types	<ul style="list-style-type: none">Floor-standing bath faucetsLong-reach wall-mounted faucets mounted to a vertical surface or side plinth <p>Tapware mounted directly to the bath may be possible by special arrangement and must be designed and installed by Star Baths as part of the manufacturing process. Final tapware selection and positioning must be confirmed prior to installation.</p>
Customisation	
Hot Water Supply	Suitable for supply from: <ul style="list-style-type: none">Mains hot and coldCalifont systemsTank or rainwater systems (with suitable water heating)
Maximum Water Temperature	55°C (to reduce scalding risk)
Warranty	<ul style="list-style-type: none">Structural: 10 yearsGelcoat surface: 3 years
Care & Use	<ul style="list-style-type: none">Clean with warm water and a mild, non-abrasive soapApproved cleaner: Mild dishwashing liquid diluted in warm waterUse soft cloths or non-scratch sponges onlyRinse thoroughly after cleaning <p>Do not use products containing abrasives, solvents, alcohol, bleach, acetone, citrus-based cleaners, or hair dye. Citrus-based cleaners are not recommended for regular use. If used occasionally for spot cleaning, rinse thoroughly immediately after.</p>
Outdoor Use	Star Baths are designed for outdoor environments. Natural ageing and subtle changes in appearance may occur over time due to UV exposure and environmental conditions. Exposure conditions vary by site and environment. Regular care will help maintain the finish.
Lids & Covers	Optional lids and covers are available to help protect the bath when not in use and maintain appearance over time. See the Star Baths collection for details.
Cladding	Star Baths may be supplied with exterior cladding or nude (no cladding). Where cladding is supplied, individual cladding care instructions are provided separately.

Star Baths Signature Bath

BPIR Summary – Star Baths

Product	Star Baths – Outdoor Freestanding Bath
Manufacturer	Composite Components Limited trading as Star Baths
Version	BPIR Summary v1.0 2026
Product Description	Star Baths are freestanding, outdoor bathing units manufactured from a fibreglass composite bath with gelcoat finish, supplied as a complete assembled unit including structural frame, insulation, optional exterior cladding, and integrated plinth base.
Intended Use	<ul style="list-style-type: none">Outdoor residential useCommercial accommodation use Not intended for use as an internal sanitary fixture.
Relevant NZ Building Code Clauses	<ul style="list-style-type: none">B2 – Durability (B2.3.1(c))G13 – Foul Water (G13.3.1) When installed and used as intended, the product is designed to enable compliance with the New Zealand Building Code.
Installation & Conditions of Use	<ul style="list-style-type: none">Outdoor use onlyMust be installed on a suitable baseInstallation must be carried out by a registered plumber or suitably qualified tradespersonWaste must connect to a compliant foul water systemHot water supply must comply with NZ plumbing requirements and must not exceed 55°C
Building Consent	A building or plumbing consent may be required where the Star Bath is connected to mains water, foul water, gas, or other regulated services. Consent requirements vary by location and scope. Responsibility for confirming consent requirements rests with the owner and installer.
Further Information	Full BPIR documentation, installation instructions, and care requirements are available from Star Baths.