

## UNI versa

Product data sheet no. 9129 - R-05

Issue: June 2025

**SPORTEC® UNI versa** is a durable flooring suitable for various types of applications. It is the ideal surface for multipurpose sports areas due to its high resilience and excellent durability against mechanical impact. **SPORTEC® UNI versa** for sports applications can be used with or without elastic underlay. In case of high shock absorbance required SPORTEC® standard can be used as elastic underlay. The combination of **SPORTEC® UNI versa** and SPORTEC® standard is offered as **SPORTEC® UNI versa** sandwich.

## Material

Material:

Coarse-grained coloured EPDM granules bonded with polyurethane elastomer.

## Product design

Colour(s): blue, red, beige, dark grey, light grey, green (other colours on request)

low colour differences are conditional of material

Colour(s):



Surface:

coarse granule structure with 100% coloured EPDM-granules



The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on [www.kraiburg-relastec.com/sportec](http://www.kraiburg-relastec.com/sportec)

page 1 of

Type of floor covering: Floor covering for indoor and outdoor (light grey only for indoor)

## Dimensions / Tolerances / Weight

Thickness(es): 4 mm ( $\pm 0.3$  mm)  
(other thicknesses on request)

Roll width: 1,250 mm ( $\pm 1.5$  %)

Roll length: 30 m (at 4 mm) ( $\pm 1.5$  %)  
(other lengths on request)

Density: approx. 1,095 kg/m<sup>3</sup>

Area weight: approx. 4.4 kg/m<sup>2</sup> (at 4 mm)

## Product Testing

Fire resistance: C<sub>fi</sub>-s1 (B1) (DIN EN 13501-1)

Tensile strength: min. 0.3 N/mm<sup>2</sup> (EN ISO 1798)

Elongation at break: min. 40 % (EN ISO 1798)

Hardness: 60  $\pm$  5 Shore A (DIN 53505)

Temperature range: -30°C to 80°C (internal tested)

Force reduction: approx. 11% (internal tested)

Ball rebound: 100 % (EN 14877)

Coefficient of friction: 0.75  $\mu$  (DS) (EN 13893)


Anti-slip property: R 10 (DIN 51130)

Anti-slip properties: C (DIN 51097)  
(wet-loaded barefoot areas)

Compression set: approx. 15 % (internal tested)

Light fastness: 4 (grey scale) (DIN EN 105-B02:2002)

ITF-Speed Class Test: slow (1) (according to ITF CS 01/02)

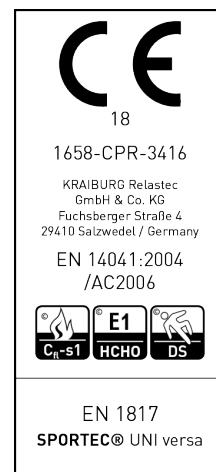

## UNI versa

Product data sheet no. 9129 - R-05

Issue: June 2025

VOC emission rating:

French VOC Regulation (A+)  
 French CMR components  
 Italian CAM Edilizia  
 ABG/AgBB  
 Belgian Regulation  
 Indoor Air Comfort  
 Indoor Air Comfort Gold  
 Formaldehyde Emission Class\$ (E1)  
 Blue Angel (DE-UZ 120)  
 BREEAM International (Exemplary Level)  
 BREEAM-NOR (Exemplary Level)  
 EU Taxonomy  
 LEED v4.1 BETA (outside U.S.)

tested according to eurofins Indoor Air Comfort® Gold

## Installation

Installation has to be done in accordance to the Installation Recommendation of **SPORTEC® UNI versa**. The latest version of the Installation Recommendation can be downloaded at the website of KRAIBURG Relastec GmbH & Co. KG.



The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on [www.kraiburg-relastec.com/sportec](http://www.kraiburg-relastec.com/sportec)

page 3 of