



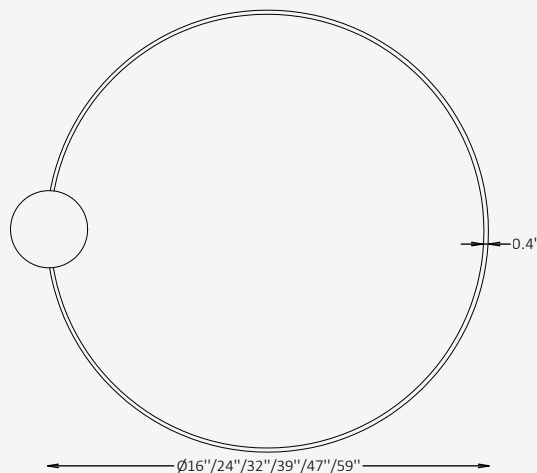

GENERAL INFORMATION


The Orbita Sora Circle reimagines the classic ring pendant with modern geometry and dual-directional light performance. Offering both inward and downward beam distribution, this elegant luminaire combines sculptural minimalism with functional illumination—ideal for hospitality, office, and wellness environments seeking subtle sophistication and enhanced visual comfort.

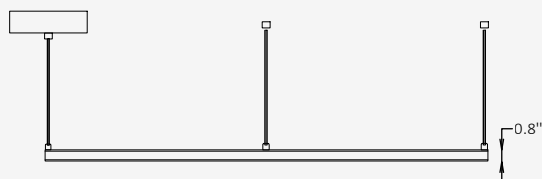

SPECIFICATIONS

Material	Aluminum
Lens	Polycarbonate
Diameter	16" / 23" / 31" / 39" / 47" / 59"
Profile Height	0.8"
Profile Width	0.4"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	20W / 30W / 40W / 50W / 60W / 80W
LED Output	70 lm/W
CCT	3000K / 4000K / 5000K
CRI	80 / 90
Dimming & Driver	Integral, 0-10V
Light Distribution	Beam In / Beam Out
IP Rating	IP 20
Warranty	5 years
Finishes	Satin White / Satin Black / RAL finishes

OTHER VERSIONS AVAILABLE

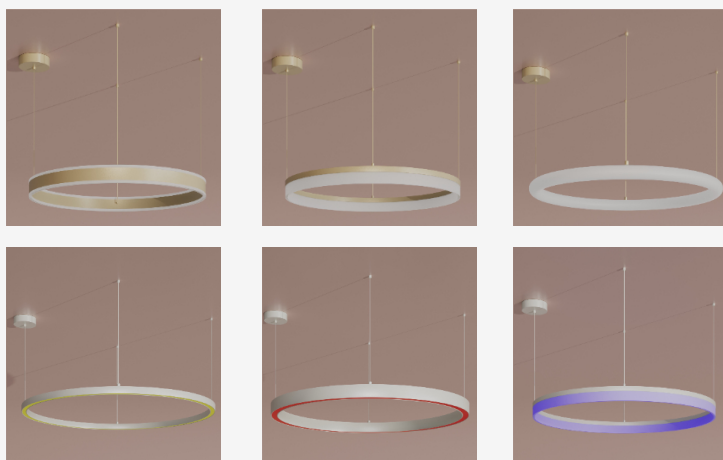

CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø / Wattage / Lumens		CCT
☒ OTS Circle / Pendant	☐ 16 16" / 20 W / 1400 lm	☐ 39 39" / 50 W / 3500 lm	☐ 30 3000K
	☐ 23 23" / 30 W / 2100 lm	☐ 47 47" / 60 W / 4200 lm	☐ 40 4000K
	☐ 31 31" / 40 W / 2800 lm	☐ 59 59" / 80 W / 5600 lm	☐ 50 5000K
Light Distribution	Dimming	CRI	Profile Finish Options
☐ BN Beam In	☐ NN Non-Dimmable	☐ CR8 80	☐ SW Satin White
☐ BO Beam Out	☐ DM 0-10V	☐ CR9 90	☐ SB Satin Black
			☐ RAL RAL Finishes
Canopy Finish Options	Cord Finish Options	Mounting	Cord Length
☐ WH White	☐ WH White	☐ CT Central Canopy Suspension	☐ L11 118" (adjustable)
☐ BL Black	☐ BL Black	☐ MO Multi-Point Suspension	☐ Cus Custom on request

Finishes

Standard finishes




RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



RAL finishes

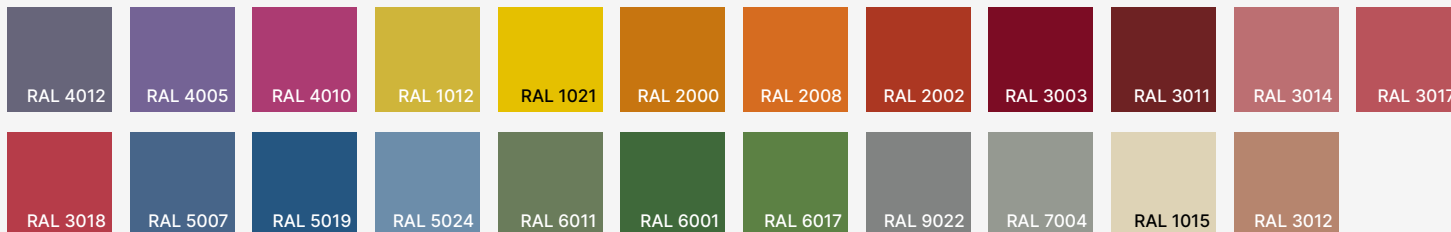

Photometric Data

