




GENERAL INFORMATION


The MARELO Bollard combines a slender architectural profile with warm material expression and controlled asymmetric illumination for contemporary outdoor environments. Its extruded aluminum body incorporates a tempered glass lens and is available with wood-effect, metallic, standard, or custom finishes, allowing the fixture to integrate naturally into both landscape and architectural settings. Offered in 24", 32", and 42" heights, MARELO features Type II, Type III, and Type IV distributions, 2700K-4000K or RGBW options, 0-10V or DMX control, and IP65 protection. Ideal for pathways, pedestrian areas, plazas, hospitality landscapes, residential developments, and commercial outdoor spaces.

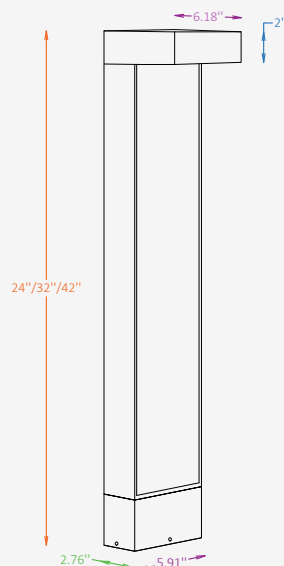

SPECIFICATIONS

Material	Extruded Aluminum + Tempered Glass
Lens	Tempered Glass
Body Height	24" / 32" / 42"
Body Width	5.91"
Body Depth	6.18"
Light Source Type	LED
Power	8W / 10W / 12W
Input Voltage	110-277V, 50-60 Hz
LED Output	90 lm/W
CCT	2700K / 3000K / 3500K / 4000K / RGBW
CRI	80
Dimming & Driver	Integral, 0-10V / DMX
Light Distribution	Type II / Type III / Type IV
IP Rating	IP 65
Warranty	5-Year Limited Warranty
Finishes	16 standard finishes 8 wood-effect finishes 12 metallic finishes Custom on request*

OTHER VERSIONS AVAILABLE

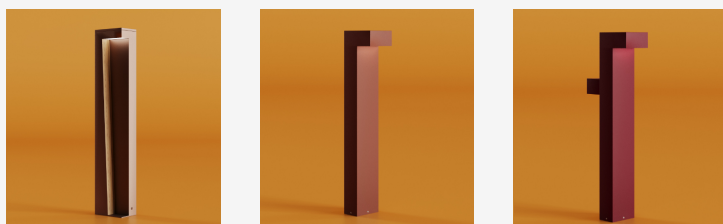

CERTIFICATION



Ordering Information


Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Body Height	Material	CCT
☒ MRO-B Bollard	☐ 24 24" ☐ 32 32" ☐ 42 42" ☐ CUS Custom on request	☐ AL Extruded Aluminum + Tempered Glass ☐ CUS Custom on request	☐ 27 2700K ☐ RGB RGB ☐ 30 3000K ☐ RGBW RGBW ☐ 35 3500K ☐ 40 4000K ☐ CUS Custom on request
Wattage / Lumens	Light Distribution	Dimming	Interior Panel Finish Option
☐ 9 9W / 720 lm ☐ 10 10W / 900 lm ☐ 12 12W / 1,080 lm ☐ CUS Custom on request	☐ LD2 Type II ☐ LD3 Type III ☐ LD4 Type IV ☐ CUS Custom on request	☐ NN Non-Dimmable (for standard white CCT only) ☐ DM 0-10V (for 2700K/ 3000K/ 3500K / 4000K) ☐ DX DMX (for RGB / RGBW)	☐ ST Standard ☐ WE Wood effect ☐ MC Metallic ☐ CUS Custom on request
Main Body Finish Option	Mounting		
☐ ST Standard ☐ WE Wood effect ☐ MC Metallic ☐ Cus Custom on request	☐ SM Surface-mounted ☐ AB Anchored Base		

Note: *RGB/RGBW options require DMX control. DMX controller/control system by others.

Finishes


Standard finishes

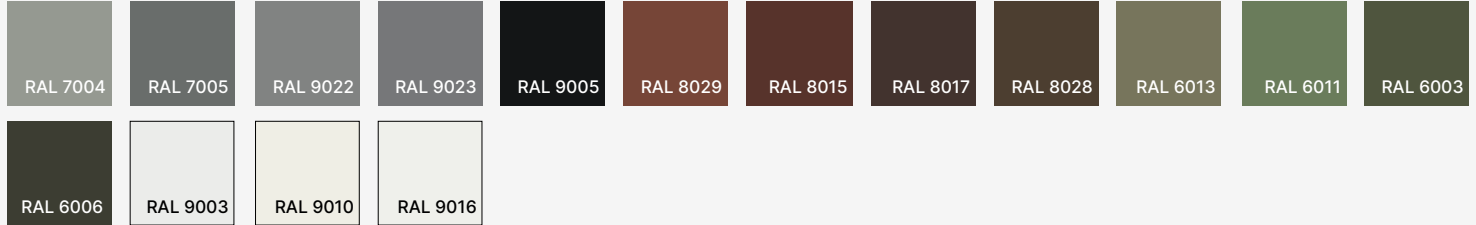

Wood-effect finishes



Metallic finishes



RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL _ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

