



# B-10 LAG

## ACOUSTICAL PIPE & DUCT WRAP


A flexible one-pound per square foot reinforced-foil-faced loaded vinyl noise barrier used to wrap noisy pipes, ducts, valves and fan housings.

### FEATURES:

- Excellent acoustical performance (STC-27)
- Flammability: UL 94: meets VO | FMVSS 302: Pass
- Temperature range: -10° to +180° F
- Nominal Thickness: 0.10"
- The reinforced foil exterior readily accepts matching lag tape for easy installation
- Also available with a 1" or 2" thick quilted fiberglass decoupler

### APPLICATIONS:

- Used to wrap noisy pipes and ducts to block the noise that transmits through the walls of the pipe or duct as air or other contents move through it

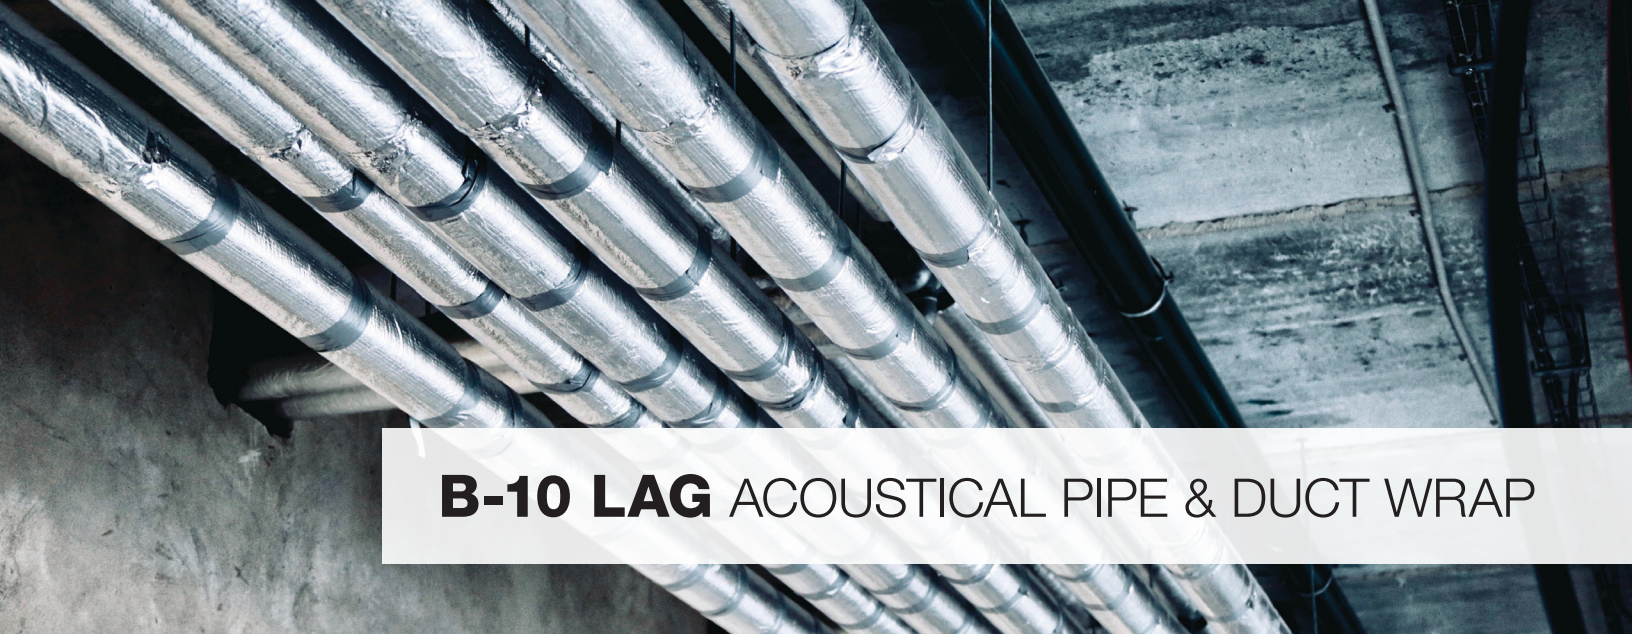

# B-10 LAG ACOUSTICAL PIPE & DUCT WRAP

## ACOUSTICAL PERFORMANCE

Sound Absorption Coefficients at the Octave Band Frequencies							
Frequency (Hz)	125	250	500	1K	2K	4K	STC
B-10 LAG	15	18	22	27	32	37	27

ASTM E 90 & E 413

## SIZING

Standard rolls measure 54" x 30' L



**MORE SPECIFICATIONS:**  
Visit [memtechacoustics.com](http://memtechacoustics.com)  
or call **248.289.1123**



[www.memtechacoustics.com](http://www.memtechacoustics.com)

