



# ST80TF STACKER

McCloskey's heavy duty high capacity feeder stacker, the ST80TF, is now designed to deliver enhanced handling and radial stockpiling of a wide range of materials. The multi-function tracked radial feeder stacker combines onsite track mobility with the high tockpiling capacity of a radial conveyor, switching from track to wheels in seconds.

### **FEATURES**


- √ 900 mm (36") wide heavy duty 24.38 m (80') long conveyor
- √ 74.5 kW (100 hp) T4F diesel engine
- √ On-site track mobility
- Hydraulic folding frame and feeder wings for easy transport
- √ Hydraulic raise and lower
- √ Fast on-site setup time (5 minutes)
- Adjustable hopper height to optimize operational efficiency





The design allows for the wheels to be fully folded for transport, delivering true site-tosite portability. The ST80TF features a large capacity hopper (5.75 cu.m. or 7.5 cu. yd.) with adjustable height, ensuring optimized operational efficiency on the job.

The ST80TF Feeder Stacker brings the best mobility, protability and production to sites around the world.

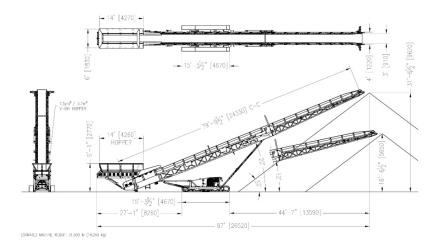

### ST80TF TECH SPECS

**Engine** 74.5kW (100Hp)

**Belt Length** 24.38m (80')

Belt Width 900mm (36")

Stockpile Height 9.47m (31' 1")

Stockpile Capacity 1556m<sup>3</sup> (2035 yd<sup>3</sup>)

**Production** 800 TPH (standard)

### **TRANSPORT**

Transport Length 18.29m (60' 0")

**Transport Height** 3.48m (11'5")

**Transport Width** 2.49m (8' 2")

## **OPTIONS**

Dual Power | Hopper Extensions |
Belt Scale | Anti-Segregation Paddle
Wheel | Spray Bar | Auxiliary Guarding
| Chevron Belt | Hopper Wing Plates |
ASGCO Scraper Hopper Wear Plate
Liner | Impact Idlers | Under Hopper
Landing Gear (Standard with Pivot
Point on Lift Axle Machines) | Magnet
Material Separator TimBin - Large
Hopper Bin (450tph) | Lift Axle