

CM60

Overwrapper for products on-edge



The concept

The CM60 is specially designed to handle products on edge. It creates end-fold packages for a wide range of products. (Sandwich) biscuits, crackers, extruded bread and rice cakes are product examples for which the CM60 offers the packaging solution.

Delicate product handling


To ensure delicate product handling, the machine features an infeed system with a double flight bar chain adapted to your product dimensions and characteristics. Moveable side guides running with each slug, while the slug is being transported into the film, maximizes product support and efficiency.

Durable construction

The robust steel frame assures smooth operation with a minimum of vibration. The stainless steel doors give full access to the driving parts and adjustment points. All levers, driven by cam discs, are mounted on hardened and precision ground shafts with needle bearings. The CM60 can be adjusted to various individual product shapes, such as round, oval, rectangular and square.

Easy operation

The CM60 offers optimal operator friendliness. The mechanical adjustments are reproducible, offering easy and precise product changeover capabilities. The cantilevered film reel holders are executed with quick-lock canes to minimize downtime. The spring-loaded endsealers smoothly absorb length tolerances during sealing.

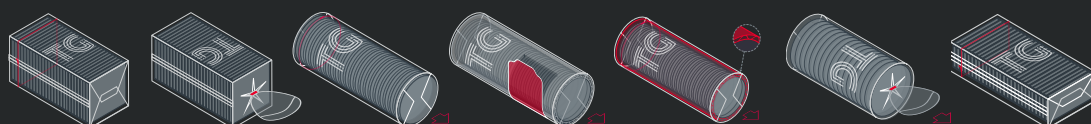

	CM60 Medium		CM60 Large	
Dimensions	Min (mm)	Max (mm)	Min (mm)	Max (mm)
Product range				
Slug length	70	260	70	360
Product width	30	110	30	110
Product height (H)	30	100	30	100
Round Product	40	100	40	100
Square product	40	85	40	85
Rectangular (W>H)	40x30	110x60	40x30	220x60
Filmreel				
Max. reel diameter	280		280	
Max. reel weight	35		35	
Max. reel width	345		435	
Cutt-off length	120-360		12-360	
Inner core diameter	70/76		70/76	
Capacity				
Max. capacity	60 p.p.m.			
Electrical				
Standard supply	3N 400 VAC			
Tolerance	+ 5%/ - 10%			
Main drive	1.1 KW DCv			
Pneumatics				
Pneumatics	Min. 6 bar			
Working height	+-935 mm			

*Specifications may differ dependant on application

Disclaimer: Not all dimension combinations are possible



Contact us

e-mail: info@tg-group.be
 phone: +32 3 210 17 90
 web: www.tg-group.be

United in expertise
 Driven by innovative packaging solution

Havinkbeekstraat 4
 9130 Verrebroek
 Belgium

