


Y-FIANGED STRAINER (UVQF510)

FEATURES

- ◆ Investment Castings For Body And Cap
- ◆ Flanged End: DIN 2501 PN16
- ◆ Face To Face: EIN 3202 F1
- ◆ Pressure Rating: PN16
- ◆ Materials: CF8M, CF8, CF3M, WCB
- ◆ Pressure Test: API598



ITEM	PART	ITEM	MATERIAL
1	BODY	1	CF8M
2	COVER	1	CF8M
3	BOLT	4(6)	304
4	GASKET	1	PTFE
5	FILTER SCREEN	1	CF8M
6	BLOW OFF PLUG	1	CF8M

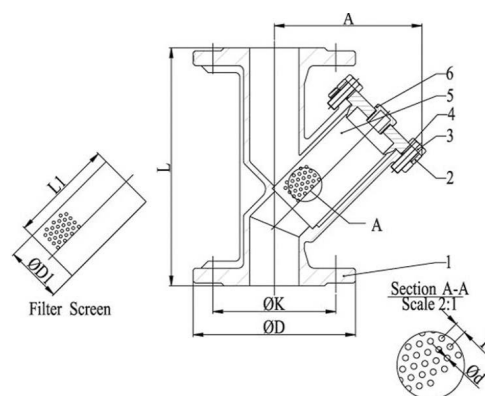

SIZE ITEM	A	ΦD	ΦD1	L	L1	P	Φd	ΦK	KGS
1/2"	75	95	22	130	58	2	1	65	1.79
3/4"	90	105	26	150	65	2	1	75	2.57
1"	100	115	32	160	72	2	1	85	3.60
1-1/4"	115	140	37	180	83	2	1	100	4.72
1-1/2"	130	150	47	200	95	2	1	110	6.02
2"	150	165	57	230	114	2	1	125	9.00
2-1/2"	190	185	69	290	152	3.5	2	145	12.80
3"	225	200	84	310	176	3.5	2	160	17.36
4"	230	220	105	350	180	3.5	2	180	20.03