

Hidden

Planstone



Height 28 to 30 mm



Smooth texture



Certified anti-slip finish, class C3



Colour-matched lacquered cover



Floor-mounted or flush installation



Ø90 mm waste with trap included
(water flow rate at 15 mm: 60 L/m)



Cutting, angle cutting or trimming available



Straight cut available

Material **Planstone**

Planstone is a composite material that combines the aesthetics of natural stone with high technical performance. It is made from a blend of mineral fillers and high-purity resins, resulting in a solid, homogeneous and highly resistant structure.



Mineral composite with polyester resin



Non-porous and homogeneous material



100% waterproof, no waterproofing membrane required



Certified anti-slip finish



Sanitary antibacterial gel coat (ISO NPG)

Standard Colours

Note: The colour of the lacquered cover may vary slightly.



(10) White


(23) Sand

(22) Grey

(26) Anthracite

(30) Black

Supplied with a lacquered cover to match the tray (standard). Other RAL colours are available on request.

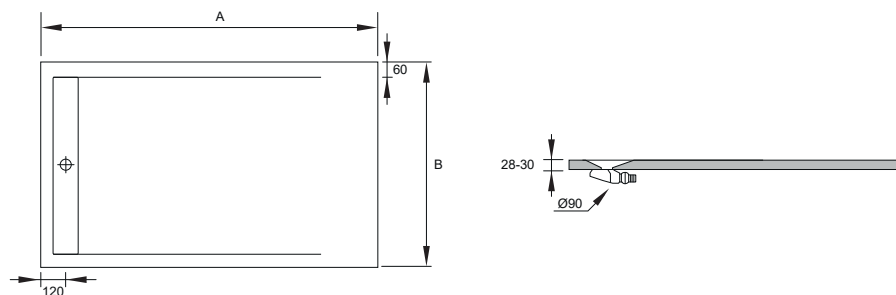

DIMENSIONS AXB (mm)	REFERENCE	NET WEIGHT	VOLUME
800x800	167211 XX 8080	30,7 kg	830x825x40
900x900	167211 XX 9090	38,6 kg	930x925x40
1000x700	167215 XX 10070	33,6 kg	1030x725x40
1000x750	167215 XX 10075	35,9 kg	1030x775x40
1000x800	167215 XX 10080	38,2 kg	1030x825x40
1000x900	167215 XX 10090	42,8 kg	1030x925x40
1000x1000	167211 XX 100100	47,4 kg	1030x1025x40
1100x700	167215 XX 11070	37 kg	1130x725x40
1100x750	167215 XX 11075	39,5 kg	1130x775x40
1100x800	167215 XX 11080	42 kg	1130x825x40
1100x900	167215 XX 11090	47 kg	1130x925x40
1100x1000	167215 XX 110100	52 kg	1130x1025x40
1200x700	167215 XX 12070	40,3 kg	1230x725x40
1200x750	167215 XX 12075	43 kg	1230x775x40
1200x800	167215 XX 12080	45,8 kg	1230x825x40
1200x900	167215 XX 12090	51,2 kg	1230x925x40
1200x1000	167215 XX 120100	56,3 kg	1230x1025x40
1300x700	167215 XX 13070	43,6 kg	1330x725x40
1300x750	167215 XX 13075	46,6 kg	1330x775x40
1300x800	167215 XX 13080	49,5 kg	1330x825x40
1300x900	167215 XX 13090	55,4 kg	1330x925x40
1300x1000	167215 XX 130100	61,4 kg	1330x1025x40
1400x700	167215 XX 14070	46,9 kg	1430x725x40
1400x750	167215 XX 14075	50,1 kg	1430x775x40
1400x800	167215 XX 14080	53,3 kg	1430x825x40
1400x900	167215 XX 14090	59,7 kg	1430x925x40
1400x1000	167215 XX 140100	66 kg	1430x1025x40
1500x700	167215 XX 15070	50,3 kg	1530x725x40
1500x750	167215 XX 15075	53,7 kg	1530x775x40
1500x800	167215 XX 15080	57,1 kg	1530x825x40
1500x900	167215 XX 15090	63,9 kg	1530x925x40
1500x1000	167215 XX 150100	70,7 kg	1530x1025x40
1600x700	167215 XX 16070	53,6 kg	1630x725x40
1600x750	167215 XX 16075	57,2 kg	1630x775x40
1600x800	167215 XX 16080	60,8 kg	1630x825x40
1600x900	167215 XX 16090	68,1 kg	1630x925x40
1600x1000	167215 XX 160100	75,4 kg	1630x1025x40

DIMENSIONS AXB (mm)	REFERENCE	NET WEIGHT	VOLUME
1700x700	167215 XX 17070	56,9 kg	1730x725x40
1700x750	167215 XX 17075	60,8 kg	1730x775x40
1700x800	167215 XX 17080	64,6 kg	1730x825x40
1700x900	167215 XX 17090	72,3 kg	1730x925x40
1700x1000	167215 XX 170100	80 kg	1730x1025x40
1800x700	167215 XX 18070	60,2 kg	1830x725x40
1800x750	167215 XX 18075	64,3 kg	1830x775x40
1800x800	167215 XX 18080	68,4 kg	1830x825x40
1800x900	167215 XX 18090	76,5 kg	1830x925x40
1800x1000	167215 XX 180100	84,7 kg	1830x1025x40
1900x700	167215 XX 19070	63,6 kg	1930x725x40
1900x750	167215 XX 19075	67,9 kg	1930x775x40
1900x800	167215 XX 19080	72,2 kg	1930x825x40
1900x900	167215 XX 19090	80,8 kg	1930x925x40
1900x1000	167215 XX 190100	89,4 kg	1930x1025x40
2000x700	167215 XX 20070	66,9 kg	2030x725x40
2000x750	167215 XX 20075	71,4 kg	2030x775x40
2000x800	167215 XX 20080	75,9 kg	2030x825x40
2000x900	167215 XX 20090	85 kg	2030x925x40
2000x1000	167215 XX 200100	94 kg	2030x1025x40
2100x700	167215 XX 21070	70,2 kg	2130x725x40
2100x750	167215 XX 21075	75 kg	2130x775x40
2100x800	167215 XX 21080	79,7 kg	2130x825x40
2100x900	167215 XX 21090	89,2 kg	2130x925x40
2100x1000	167215 XX 210100	98,7 kg	2130x1025x40
2200x700	167205 XX 22070	73,5 kg	2230x725x40
2200x750	167205 XX 22075	78,5 kg	2230x775x40
2200x800	167205 XX 22080	83,5 kg	2230x825x40
2200x900	167205 XX 22090	93,4 kg	2230x925x40
2200x1000	167205 XX 220100	103,4 kg	2230x1025x40
2300x700	167205 XX 23070	76,9 kg	2330x725x40
2300x750	167205 XX 23075	82,1 kg	2330x775x40
2300x800	167205 XX 23080	87,3 kg	2330x825x40
2300x900	167205 XX 23090	97,7 kg	2330x925x40
2300x1000	167205 XX 230100	108 kg	2330x1025x40
2600x800	167205 XX 26080	98,6 kg	2675x875x175
2600x900	167205 XX 26090	110,3 kg	2675x975x175
2600x1000	167205 XX 260100	122,1 kg	2675x1075x175

Dimensional tolerance: $\pm 1\%$

Weight based on average thickness | Cardboard packaging: 1.41 kg/m² | Wooden packaging: 20.65 kg/m²

Replace "XX" with: 10 White; 22 Grey; 23 Sand; 26 Anthracite; 30 Black

Maintenance

Avoid contact with lacquers, nail polish remover, organic solvents, lit cigarettes or other corrosive products.
Do not clean with abrasive pads. Use only water, neutral soap and a soft cloth.

Standard: EN 14527 – CL1 + CL2
Standard: EN 16165 – C3