


Line

Planstone



Height 25 to 29 mm

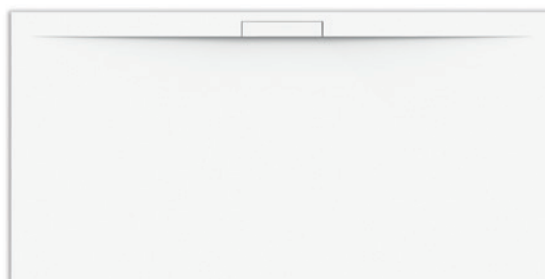

Floor-mounted or flush installation



Smooth texture



265x64 mm waste with trap included
(water flow rate at 15 mm: 60 L/m)



Certified anti-slip finish, class C3



Cutting, angle cutting or trimming available



Colour-matched lacquered cover



Straight cut available

Material **Planstone**

Planstone is a composite material that combines the aesthetics of natural stone with high technical performance. It is made from a blend of mineral fillers and high-purity resins, resulting in a solid, homogeneous and highly resistant structure.



Mineral composite with polyester resin



Certified anti-slip finish



Non-porous and homogeneous material



Sanitary antibacterial gel coat (ISO NPG)



100% waterproof, no waterproofing membrane required

Standard Colours

Note: The colour of the lacquered cover may vary slightly.



(10) White


(23) Sand

(22) Grey

(26) Anthracite

(30) Black

Supplied with a lacquered cover to match the tray (standard). Other RAL colours are available on request.

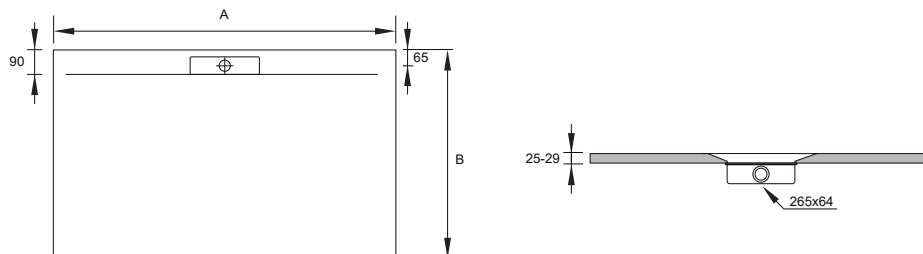

DIMENSIONS AXB (mm)	REFERENCE	NET WEIGHT
700x700	167311 XX 7070	22,2 kg
800x700	167315 XX 8070	25,5 kg
800x800	167311 XX 8080	29,1 kg
900x700	167315 XX 9070	28,8 kg
900x800	167315 XX 9080	32,9 kg
900x900	167311 XX 9090	36,9 kg
1000x700	167315 XX 10070	32,2 kg
1000x800	167315 XX 10080	36,7 kg
1000x900	167315 XX 10090	41,1 kg
1000x1000	167311 XX 100100	45,6 kg
1100x700	167315 XX 11070	35,5 kg
1100x800	167315 XX 11080	40,4 kg
1100x900	167315 XX 11090	45,4 kg
1100x1000	167315 XX 110100	50,3 kg
1200x700	167315 XX 12070	38,8 kg
1200x800	167315 XX 12080	44,2 kg
1200x900	167315 XX 12090	49,6 kg
1200x1000	167315 XX 120100	55 kg
1200x1200	167301 XX 120120	65,8 kg
1300x700	167315 XX 13070	42,1 kg
1300x800	167315 XX 13080	48 kg
1300x900	167315 XX 13090	53,8 kg
1300x1000	167315 XX 130100	57,7 kg
1300x1200	167305 XX 130120	71,4 kg
1400x700	167315 XX 14070	45,5 kg
1400x800	167315 XX 14080	51,8 kg
1400x900	167315 XX 14090	58,1 kg
1400x1000	167315 XX 140100	64,4 kg
1400x1200	167305 XX 140120	77 kg
1500x700	167315 XX 15070	48,8 kg
1500x800	167315 XX 15080	55,6 kg
1500x900	167315 XX 15090	62,3 kg
1500x1000	167315 XX 150100	69,1 kg
1500x1200	167305 XX 150120	82,6 kg
1600x700	167315 XX 16070	52,1 kg
1600x800	167315 XX 16080	59,3 kg
1600x900	167315 XX 16090	66,6 kg
1600x1000	167315 XX 160100	73,8 kg
1600x1200	167305 XX 160120	88,2 kg

DIMENSIONS AXB (mm)	REFERENCE	NET WEIGHT
1700x700	167315 XX 17070	55,4 kg
1700x800	167315 XX 17080	63,1 kg
1700x900	167315 XX 17090	70,8 kg
1700x1000	167315 XX 170100	78,5 kg
1700x1200	167305 XX 170120	93,8 kg
1800x700	167315 XX 18070	58,8 kg
1800x800	167315 XX 18080	66,9 kg
1800x900	167315 XX 18090	75 kg
1800x1000	167315 XX 180100	83,2 kg
1800x1200	167305 XX 180120	99,4 kg
1900x700	167315 XX 19070	62,1 kg
1900x800	167315 XX 19080	70,7 kg
1900x900	167315 XX 19090	79,3 kg
1900x1000	167315 XX 190100	87,8 kg
1900x1200	167305 XX 190120	105 kg
2000x700	167315 XX 20070	65,4 kg
2000x800	167315 XX 20080	74,5 kg
2000x900	167315 XX 20090	83,5 kg
2000x1000	167315 XX 200100	92,5 kg
2000x1200	167305 XX 200120	110,6 kg
2200x700	167305 XX 22070	72,1 kg
2200x800	167305 XX 22080	82 kg
2200x900	167305 XX 22090	92 kg
2200x1000	167305 XX 220100	101,9 kg
2200x1200	167305 XX 220120	121,8 kg
2500x700	167305 XX 25070	82,1 kg
2500x800	167305 XX 25080	93,4 kg
2500x900	167305 XX 25090	104,7 kg
2500x1000	167305 XX 250100	116 kg
2500x1200	167305 XX 250120	138,6 kg

Replace "XX" with: 10 White; 22 Grey; 23 Sand; 26 Anthracite; 30 Black
Dimensional tolerance: ±1% | Weight based on average thickness

Cardboard packaging: 1.41 kg/m² | Cardboard packaging volume: (A+30 mm) x (B+25 mm) x 40 mm
Wooden packaging: 20.65 kg/m² | Wooden packaging volume: (A+75 mm) x (B+75 mm) x 175 mm

Maintenance

Avoid contact with lacquers, nail polish remover, organic solvents, lit cigarettes or other corrosive products.
Do not clean with abrasive pads. Use only water, neutral soap and a soft cloth.

Standard: EN 14527 – CL1 + CL2

Standard: EN 16165 – C3