

10 HP | 35.4 CFM Pressure Lubricated Reciprocating Compressors


35.4 CFM @ 175 PSI

Features


- Heavy-duty pressure lubricated two-stage solid cast iron pump
- Disk and spring valves
- Centrifugal unloader
- Bearings on both ends of the crank shaft
- Needle bearings, and inserts on rods
- Torrington needle bearings
- Swedish steel valves
- Access to compressor valves without compressor head removal
- All UL electrical controls
- ASME/CRN certified air receiver
- Auto start/stop
- Fully enclosed belt guard
- Heavy-duty air filter
- Industrial grade electric motor
- TEFC drive motor (3 phase only)
- Magnetic starter mounted and wired
- Stainless steel flexible air lines
- 2-groove B width motor pulley
- 2-piece tank/top plate design

Elite Features

- All basic features
- Automatic tank drain
- Belt guard mounted after cooler
- Low oil monitor
- Tank discharge ball valve
- Vibration pads
- Freight pre-paid in the 48 states & southern Canada



Air cooled after cooler on Elite models

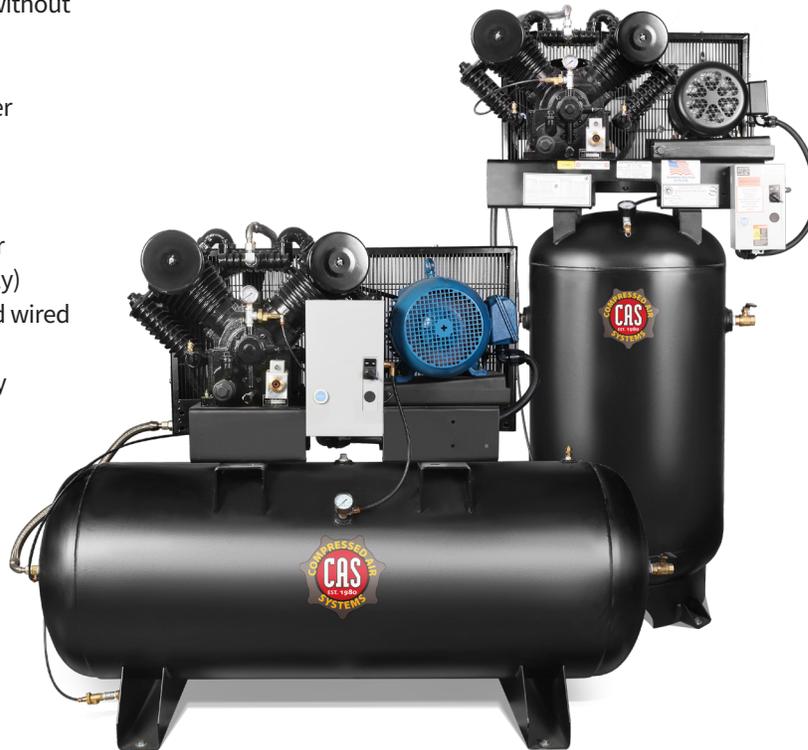

Model	HP	CFM @ 175 PSI	Voltage	Tank	LxWxH	Weight
B101V86-PL	10	35.4	208-230/1	80 Gallon Vertical	36x24x74	900
B103V86-PL	10	35.4	208-230/480/3	80 Gallon Vertical	36x24x74	900
B101H86-PL	10	35.4	208-230/1	80 Gallon Horizontal	64x24x48	875
B103H86-PL	10	35.4	208-230/480/3	80 Gallon Horizontal	64x24x48	875
B101V126-PL	10	35.4	208-230/1	120 Gallon Vertical	42x30x75	1000
B103V126-PL	10	35.4	208-230/480/3	120 Gallon Vertical	42x30x75	1000
B101H126-PL	10	35.4	208-230/1	120 Gallon Horizontal	69x27x53	975
B103H126-PL	10	35.4	208-230/480/3	120 Gallon Horizontal	69x27x53	975

Add -E after model number to make Elite Model

No Start Up Kit Required

Lifetime Parts Warranty Available

Compressed Air Systems

Simplicity. It's What We Do.

compressed-air-systems.com | 1-800-531-9656 | Fax 972-352-6364

© Compressed Air Systems, LLC 01-2026



Scan to visit our website

