


GENIE GS-2632

SCISSOR LIFT

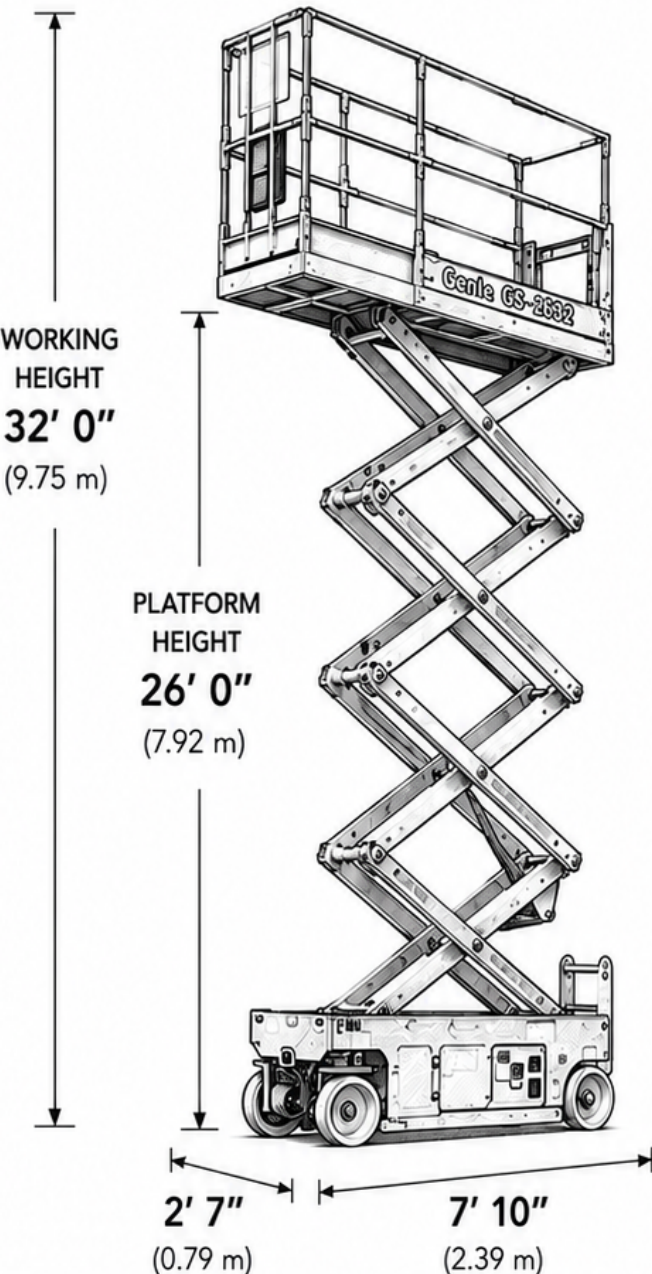

BEST FOR

- General Construction
- Electrical Work
- HVAC Installation
- Facility Maintenance
- Painting & Finishing
- Indoor Applications

SPECIFICATIONS	
Working Height	32 ft 0 in (9.75 m)
Platform Height	26 ft 0 in (7.92 m)
Platform Capacity (Unrestricted)	500 lb (227 kg)
Platform Extension	3 ft (0.91 m)
Overall Length	7 ft 10 in (2.39 m)
Overall Width	2 ft 7 in (0.79 m)
Overall Height (Rails Up)	7 ft 7 in (2.31 m)
Overall Height (Rails Down)	5 ft 10 in (1.78 m)
Ground Clearance (Stowed)	3.5 in (8.9 cm)
Wheelbase	6 ft 4 in (1.93 m)
Drive Speed (Stowed)	3.5 mph (5.6 km/h)
Drive Speed (Raised)	0.5 mph (0.8 km/h)
Gradeability	25%
Turning Radius (Inside)	0 ft (0 m)
Turning Radius (Outside)	7 ft 6 in (2.29 m)
Machine Weight	4,551 lb (2,065 kg)
Power Source	24V DC (Four 6V 225 Ah batteries)
Tires	Non-Marking Solid



- Electric Scissor Lift
- 3 ft Platform Extension
- Proportional Lift and Drive
- Indoor / Flat Surface Use



844-935-3960



stackequipment.com



Now Serving
WI - FL - TX - NC

Specifications are provided for reference only and may vary by serial number, year, or manufacturer updates.
JLG®, Genie®, Skyjack®, and MEC® are trademarks of their respective owners.
Stack Equipment is not affiliated with or endorsed by these companies.