



ENDURO 175

POST-MIX ICE DRINK DISPENSER



FEATURES

Large ice capacity- 175 lb. ice capacity

Choices - Available with 8 UFB-1™ sanitary lever or push button valves

Merchandising - Highly efficient LED illuminated merchandiser utilizing a brighter, longer lasting bulb, providing a high impact visual display

Ice - Gravity ice dispensing with positive shut-off provides excellent ice targeting
Ice used to cool cold plate is separate from ice dispensed into cups


Durable – easily changes from carbonated to non-carbonated One piece ABS thermoformed plastic (Durabide™ design) provides durability and ensures all ice in hopper is dispensable

Flexible - Unit readily accepts top mount cubers with manual ice fill capability

Quality - Stainless steel cabinet

Ease of Use - Modular design allows for easy component access from the front of the unit

TotalFlex™ – easily changes from carbonated to non-carbonated

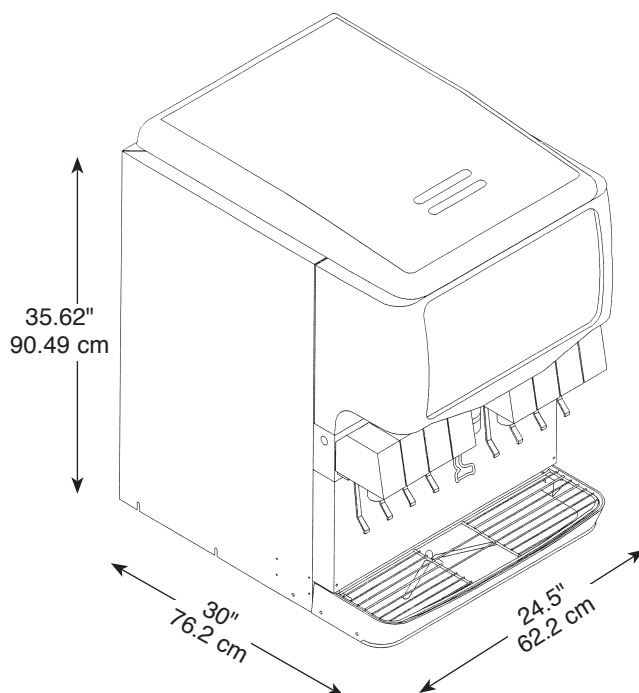

PART NUMBER	DESCRIPTION
621052703	Enduro 175 Ice Drink Dispenser with 8 UFB-1™ 2-4 oz Sanitary Lever Valves
621052706	Enduro 175 Ice Drink Dispenser with 8 UFB-1™ 2-4 oz Push Button Valves
3470	Enduro 175 Dispenser Stand - Stainless Steel 30"H x 24.5"W x 30"D

* If top mounting an ice maker, an ice maker adapter kit is required. Order separately.

TECHNICAL SPECIFICATIONS

ICE STORAGE CAPACITY.....	175 lb (79.38 kg)
BEVERAGE MANIFOLDING.....	TotalFlex
CUP CLEARANCE.....	9.75" (24.76 cm)
COOLING CAPACITY.....	10-12 oz drinks/min @ 75°F
DRAIN CONNECTION.....	0.75" PVC (NPT) or 1" ID flexible tubing
GRAPHIC SIZE.....	Overall: 11.083"H x 19.294"W Viewable: 10.608"H x 18.67"W

STANDARD FEATURES.	Beverage Key Switch, timed agitation and 4" legs
ELECTRICAL RATING.	115 V / 60 Hz / 3 Amps
SHIPPING WEIGHT.	230 lb (104.33 kg)

AGENCY LISTINGS.....









© 2017 CORNELIUS CATG8482-0217

IN THE U.S.A.
Ph: 800.238.3600
Fax: 800.258.0255

OUTSIDE THE U.S.A.
Ph: 763.488.8200
Email: webmaster@cornelius.com

101 Broadway Street West
Osseo, MN 55369
www.cornelius-usa.com

For more information or to place an order, contact your sales representative or authorized distributor.