



INTRAFLEX PLUS 150BC

UNDER COUNTER POST-MIX ICE DRINK DISPENSER



SFV1™ valves shown

FEATURES


- Large ice bin** - 150 lb ice capacity
- Compact** - Attractive one-piece rounded tower includes ice dispense and beverage dispense
- Options** - Available with 8 SFV1™ or LEV™ self serve levers or push button post-mix dispensing valves
- Small footprint** - Easy countertop drop-in for minimum space consumption
- Low profile** - Does not restrict visibility
- Convenient** - Waist level manual ice fill from front or rear



- Ice variety** - Capable of dispensing all cube sizes up to one inch squared and pellet ice with minimum true ice rating of 88%
- Customizable** - Left or right hand ice dispense options
- Adjustable** - Ice dispense rate, 2-5 oz/sec
- Cooling** - Patented cold plate design for optimal beverage cooling
- Easy access** - Ice dispense system can be serviced and cleaned from top and front of dispenser
- Durable** - One piece Durabide™ ABS thermoformed ice storage provides durability and ensures all ice in hopper is dispensable

PART NUMBER	DESCRIPTION
621063068	IntraFlex Plus 150 with 8 SFV1™ sanitary lever valves, right-side ice dispense
621063063	IntraFlex Plus 150 with 8 SFV1™ sanitary lever valves, left-side ice dispense
629087401	Drain line support kit
629087528	Splash guard kit IntraFlex Plus 150
629087702	Unit stand with 3 in. casters

NOTE: Dispenser subject to Coca-Cola Feat approval
For more information see Pre-Installation Guidelines

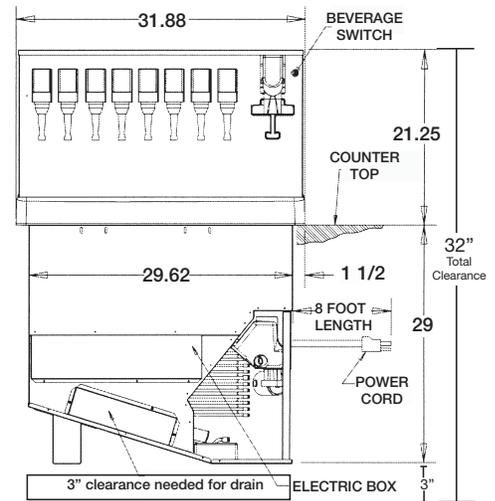

TECHNICAL SPECIFICATIONS

ICE DISPENSER CAPACITY 150 lb

ICE DISPENSER LOCATION Choice of right or left hand dispense; must be specified at time of order

BEVERAGE MANIFOLDING 3-1-1-3

CUP CLEARANCE 9.75"

DRINK PERFORMANCE 4 – 12 oz drinks/min at 75° will result in a drink temperature below 40°

DRAIN CONNECTIONS 1-Lower drip tray, 3/4" PVC pipe/fittings
1-Upper drip tray, 3/4" PVC pipe/fittings

DIMENSIONS 31.875"W x 27.875"D

COUNTER CUTOUT

DIMENSIONS 30"W x 26.25"D

WEIGHT Empty: 285 lb
Full: 435 lb
Shipping: 310 lb

HEIGHT ABOVE COUNTER. 21.31"

DISTANCE BELOW COUNTER 29" (an additional 3" is needed for drain clearance = total clearance 32")

UNIT SUPPORT Counter must support 435 lb (recommended from below)

STANDARD FEATURES Beverage key Switch, automatic timed ice agitation

ELECTRICAL

REQUIREMENTS 115 V / 60 Hz / 3 Amps

AGENCY LISTINGS



City of Los Angeles

Coca-Cola and Coca-Cola Classic are registered trademarks of the Coca-Cola Company.



© 2016 CORNELIUS

CATC8479-0616

IN THE U.S.A.
Ph: 800.238.3600
Fax: 800.258.0255

OUTSIDE THE U.S.A.
Ph: 763.488.8200
Fax: 800.258.0255

101 Broadway Street West
Osseo, MN 55369
www.cornelius-usa.com

For more information or to place an order, contact your sales representative or authorized distributor.