



# INSTALLATION INSTRUCTIONS

## DF200/250 ICE MAKER ADAPTER LID KITS, P/N 629083803TE

**Table 1. Loose Shipped Parts**

| Item No. | Part No.       | Name                           | Qty. |
|----------|----------------|--------------------------------|------|
| 1        | 620066267      | Lid and Lanyard Assembly, Grey | 1    |
| 2        | 620030906      | Icemaker Adapter Lid Assembly  | 1    |
| 3        | 22127          | Bracket                        | 2    |
| 4        | 70217          | #8 Screw                       | 12   |
| 5        | 50904          | RTV                            | 1    |
| 6        | 90221          | Label                          | 1    |
| 7        | 629083803TEINS | Installation Instruction       | 1    |
| 8        | 620701902      | Acorn Nut, 8-32 Nylon          | 2    |
| 9        | 620701901      | Sealing Washer                 | 2    |
| 10       | 620037003      | Baffle, Ice ED2XX              | 1    |
| 11       | 620701903      | #8 Nylon Washer                | 2    |
| 12       | 02394          | Ice Diverter Kit               | 1    |
| 13       | 70100          | Hex Nut 08-32                  | 2    |
| 14       | 43164          | Screw 08-32                    | 2    |

**WARNING:**

Disconnect power to the unit before installing the adaptor following all lockout/tag out procedures established by the user. Verify that all the power is off to the unit before performing any work.

**Failure to comply could result in serious injury, death or damage to the equipment.**

**WARNING:**

All ice baffle plates and bin stats, if included or recommended in this kit, must be installed as directed in this manual or the equipment manufacturer's instructions.

**Failure to comply could result in serious injury, death or damage to the equipment.**

**WARNING:**

All of the attachment screws and plates must be installed as directed in this manual.

**Failure to comply could result in serious injury, death or damage to the equipment.**

1. Unpack and inspect the kit.
2. Insert a baffle assembly into the adapter lid.
3. Place (2) sealing washers (item 9) and (2) flat washers (item 11) over the studs, then fasten them in place with (2) plastic acorn nuts (item 8).
4. Set the ice maker lid on the top of the dispenser.
5. Using the slotted holes in the lid as a template, drill four (4) 0.140" diameter (9/64") holes at the bottom of the slots (see Detail A, Figure 3). **Use extreme care not to drill into the hopper.** Fasten the lid to the dispenser with four (4) #8 sheet metal screws, two on each side.
6. Seal the ice maker to the top of the dispenser as follows:
  - A. Run beads of RTV around the opening in the lid and inside of the perimeter of the ice maker outline so that the ice maker sets on the RTV.
  - B. Set the ice maker onto the lid and position it as required.
  - C. Wipe away the excess RTV.

7. Drill 9/64" diameter holes into the ice maker cabinet using the bracket as a template. **Use extreme care not to drill into any ice maker components (condenser, tubing, etc.).** Secure the brackets using the screws provided
8. Follow the ice maker manufacturers instruction to complete the installation of the ice maker including the bin thermostat if so equipped or required.
9. If the plastic acorn nuts interfere with the positioning of the plastic manual fill cover, it may be necessary to make small notches in the back flange of the cover to clear the acorn nuts.

**NOTE: Bin thermostat must not interfere with the agitator rotation.**

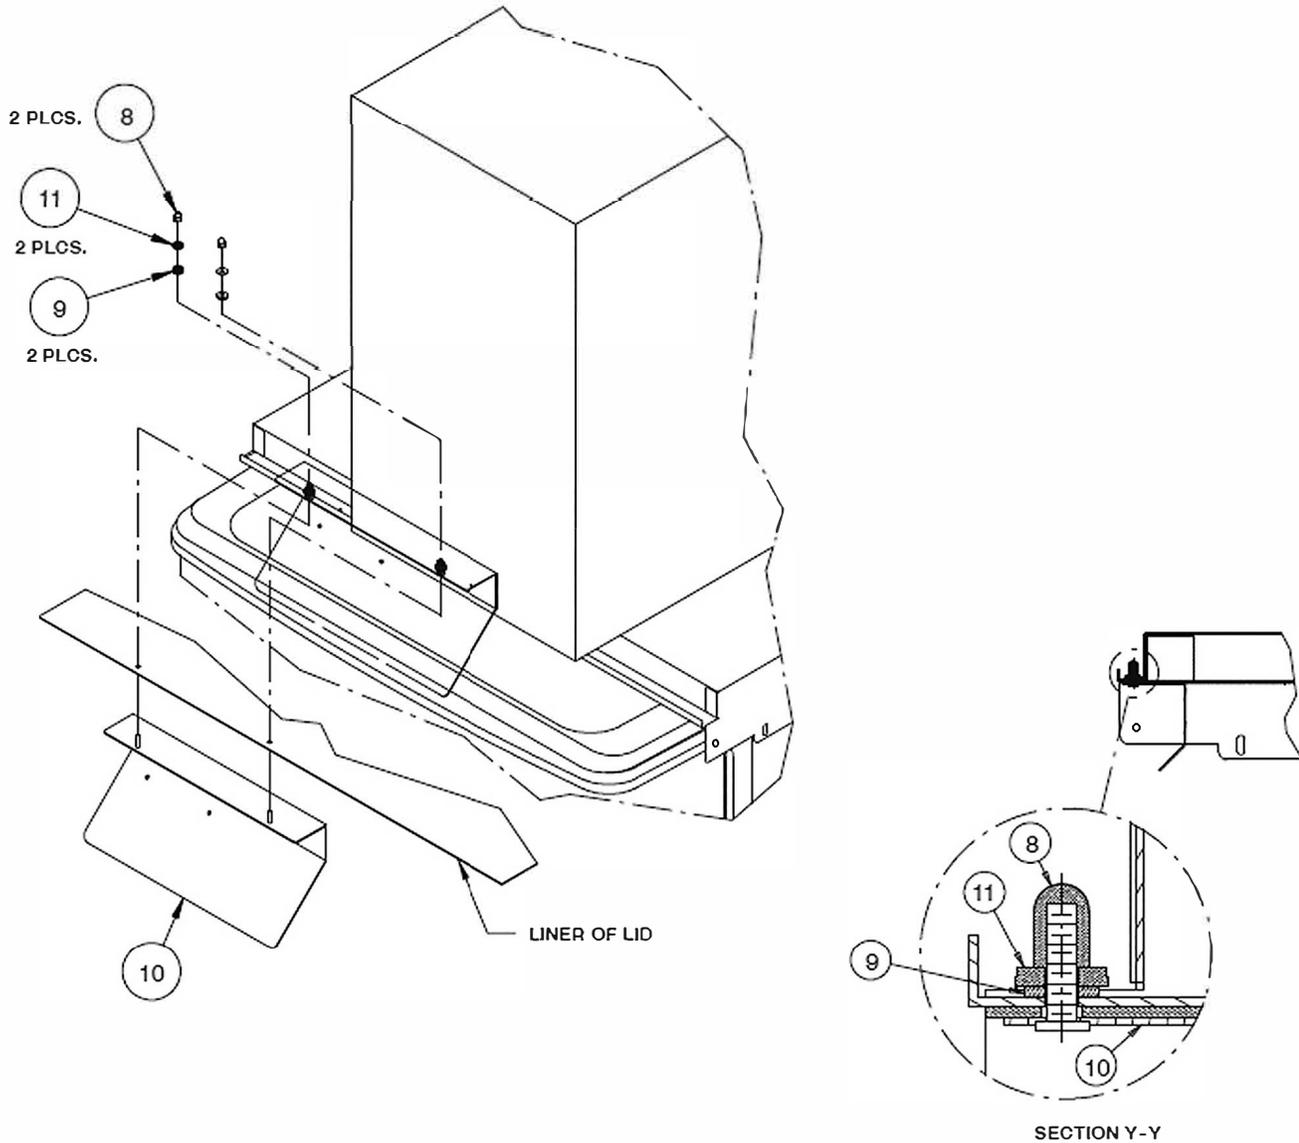


Figure 1. DFXX Kit

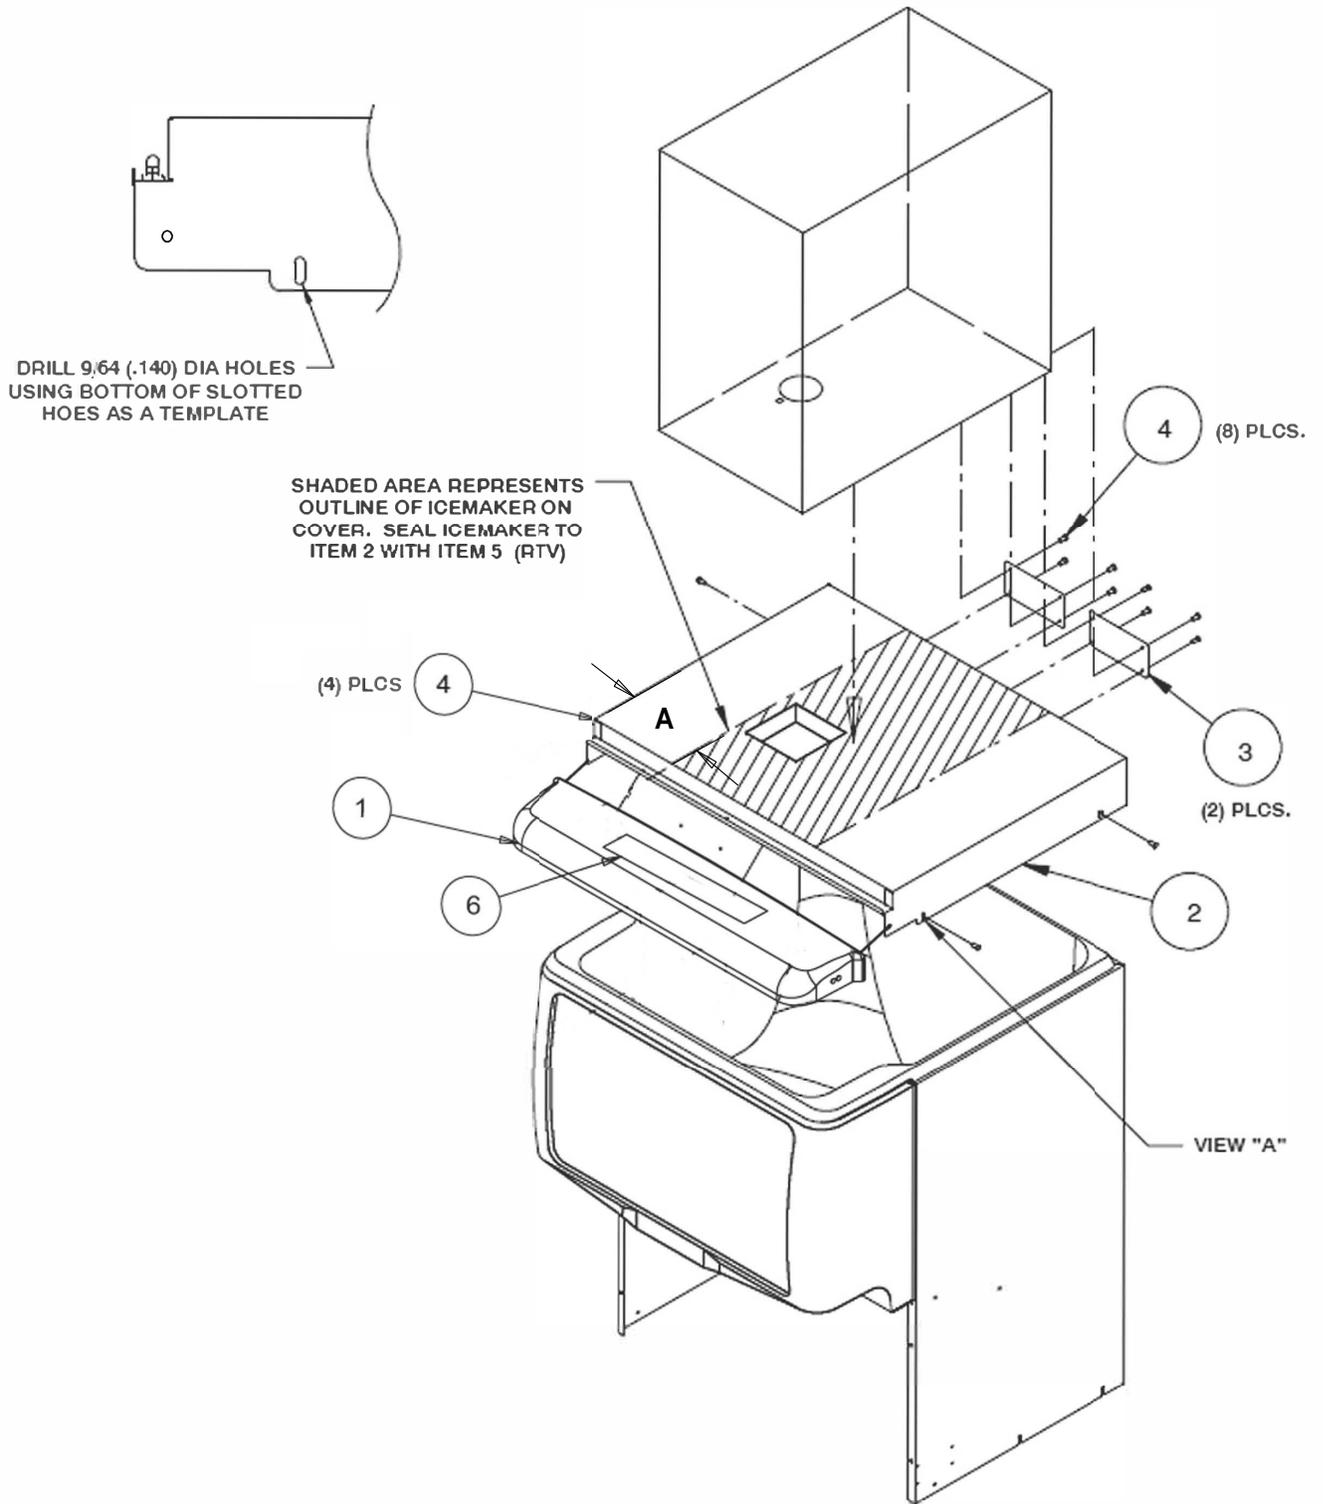
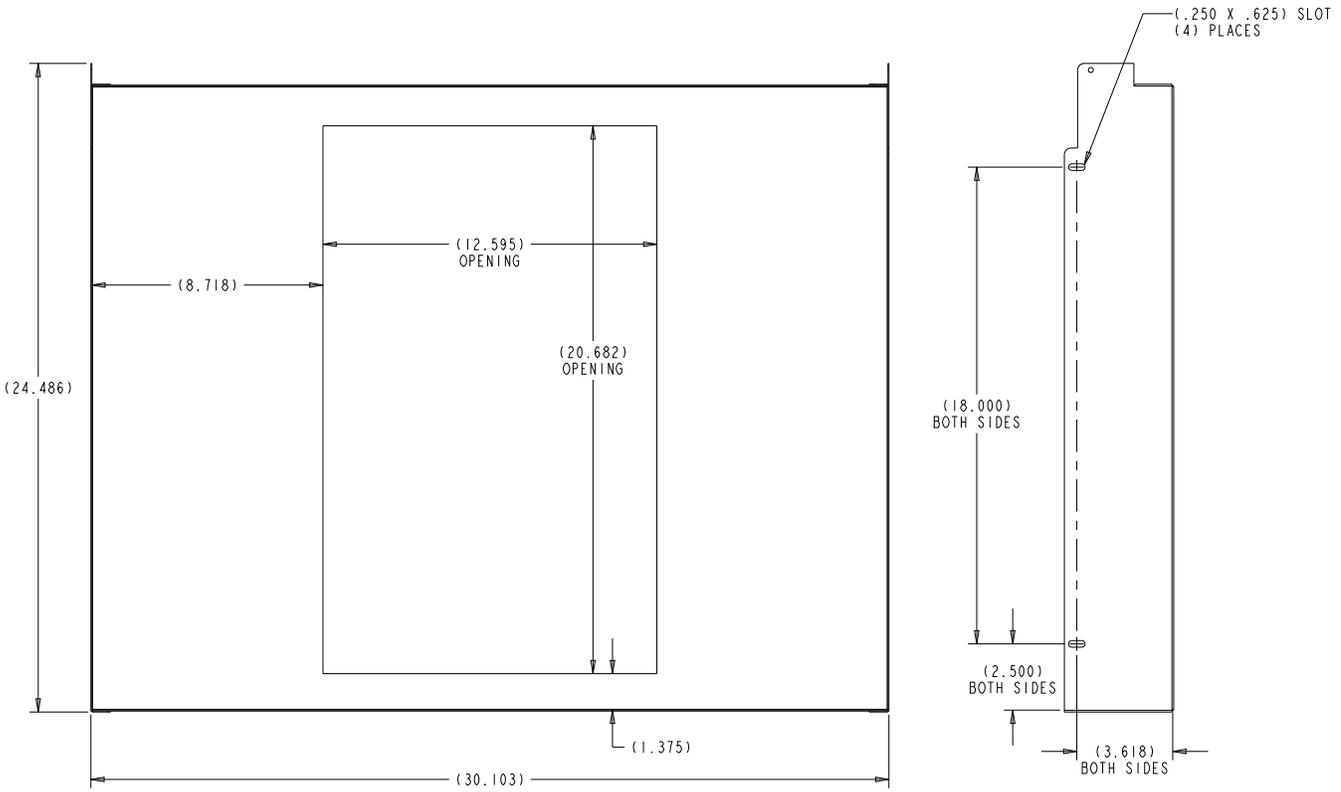


Figure 2. Dispenser Assembly

|       | Wilshire<br>WCC500/700 | Scotsman<br>NME654/954 |
|-------|------------------------|------------------------|
| DIM.A | 7-3/4 IN.              | 4-3/16 IN.             |



**Figure 3. Reference Sheetmetal Cover Opening Dimensions for Mounting Icemaker.**