



KIT #1994

Installation Instructions

For installing a Scotsman CM450 icemaker on a Remcor Model TJ90-D dispenser.

1. Disconnect power to dispenser.
2. Remove upper front panel from dispenser.
3. Using Fig. 1 as a guide:
 - A. Install gate restrictor plate.
 - B. Install agitation timer in electric box with screws provided (See Fig 4). See wiring diagram for timer harness hook-up. Note that red jumper between capacitor and relay is to be removed from capacitor and connected to the timer. Check that cycle time dials are set as shown below (2 sec. on and 20 min. off).
 - C. Using the top cover as a template, locate and drill (4) .136 dia. holes (#29 drill size) in left and right sides of dispenser cabinet.
 - D. Secure top cover to dispenser with (4) sheet metal screws provided.
4. Using Fig. 2 as a guide:
 - A. Locate and secure icemaker base bracket to top cover with screws provided.
 - B. Locate gasket on icemaker base bracket and top cover.
 - C. Set icemaker into position on the gasket on dispenser top cover and base bracket.
 - D. Locate icemaker mounting bracket as shown. Using the bracket as a template, drill (4) .136 dia. holes (#29 drill size) in both the dispenser top cover and icemaker cabinet. Secure the bracket with the screws provided.
5. Follow the manufacturer's instructions to complete the installation of the icemaker.

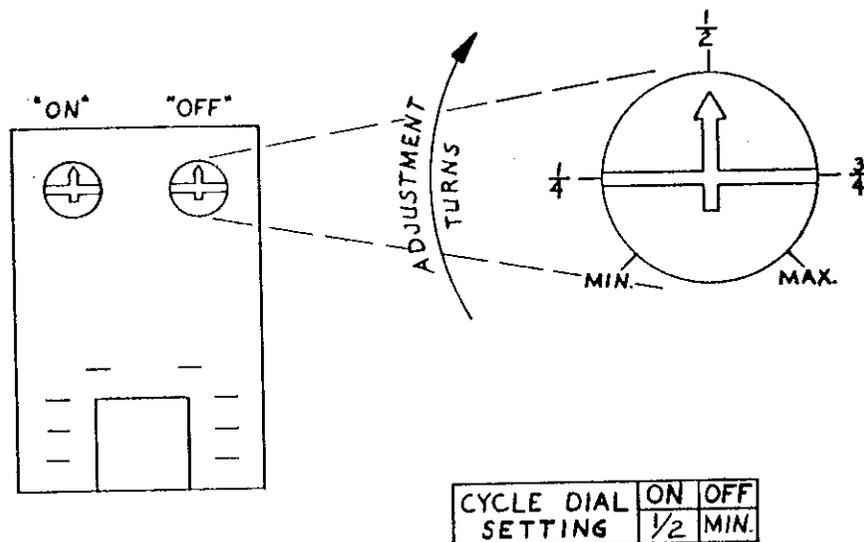

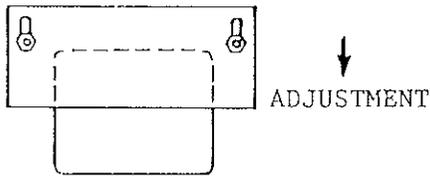

Install restrictor plate in full up position. Move downward to reduce dispensing rate of ice, if required.

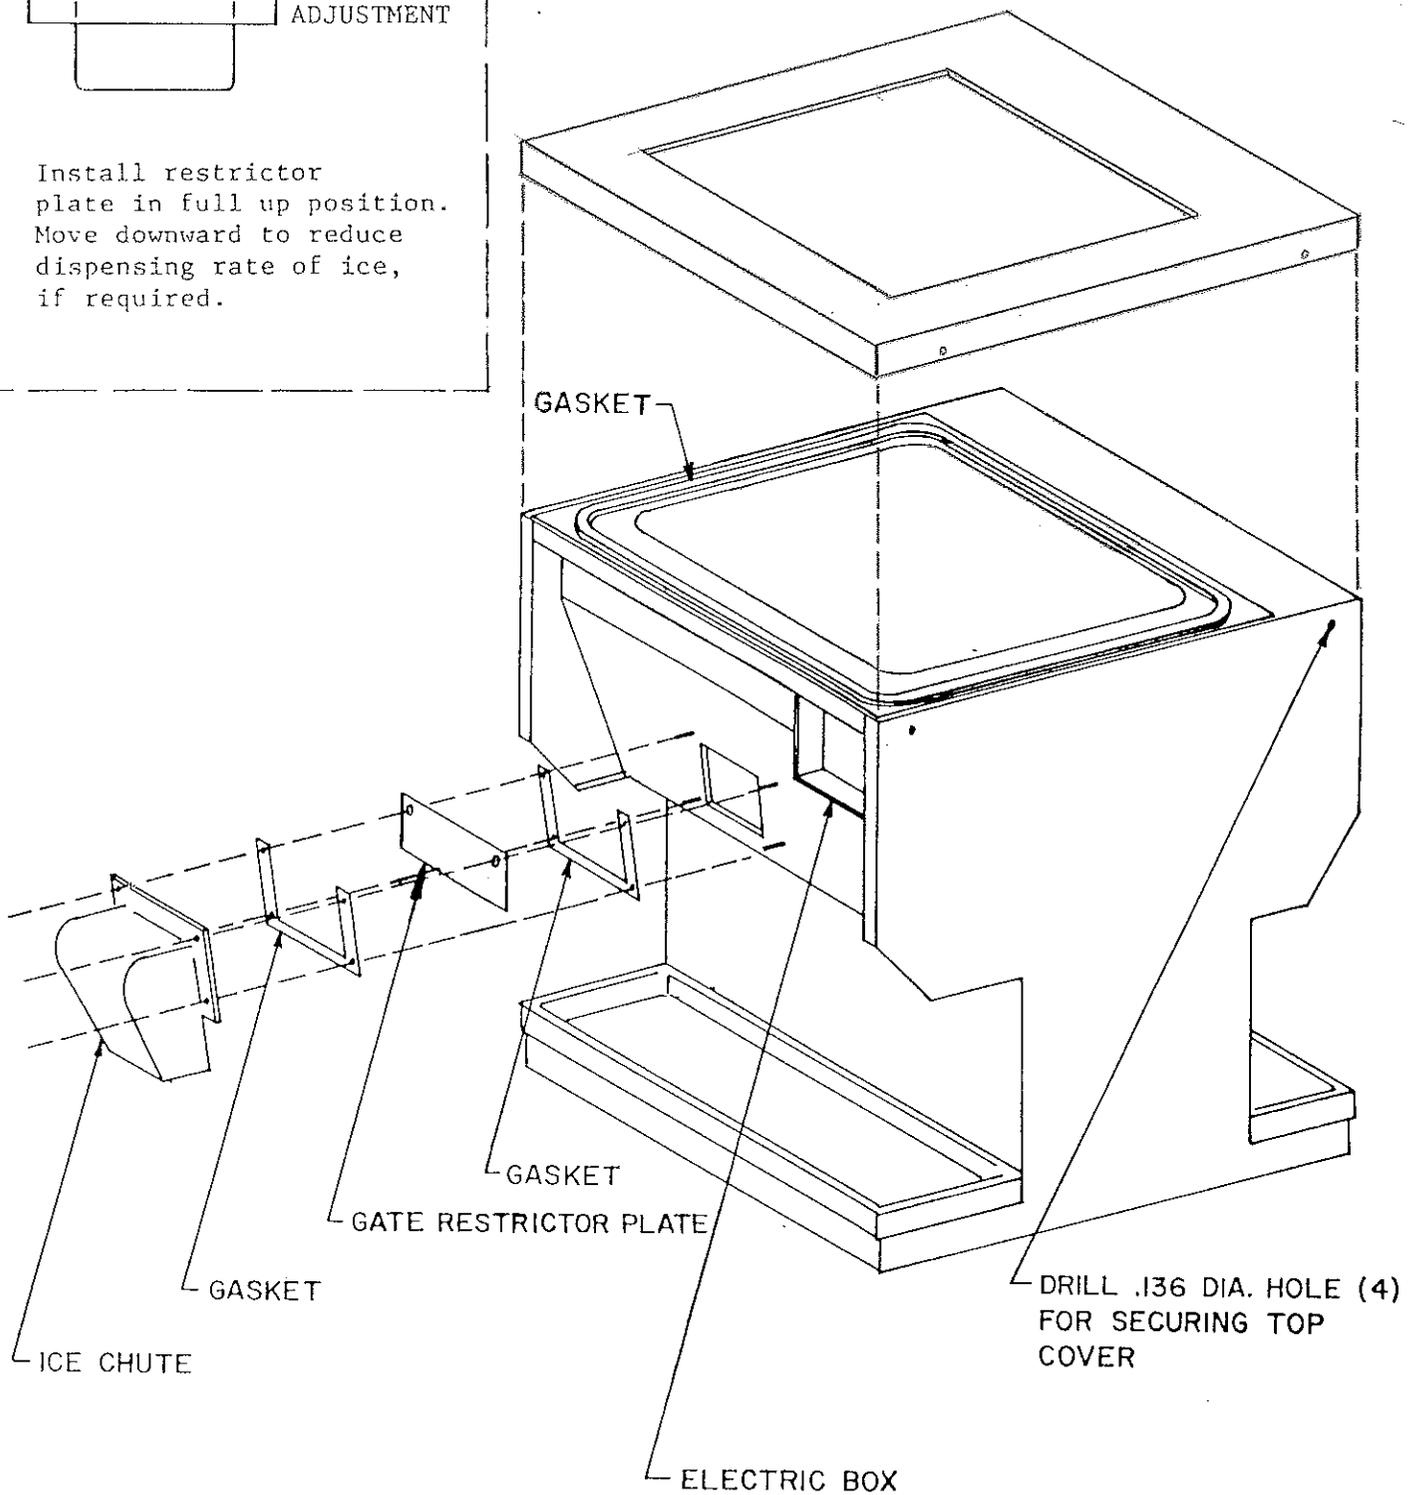


FIG 1.
(UPPER FRONT PANEL REMOVED)


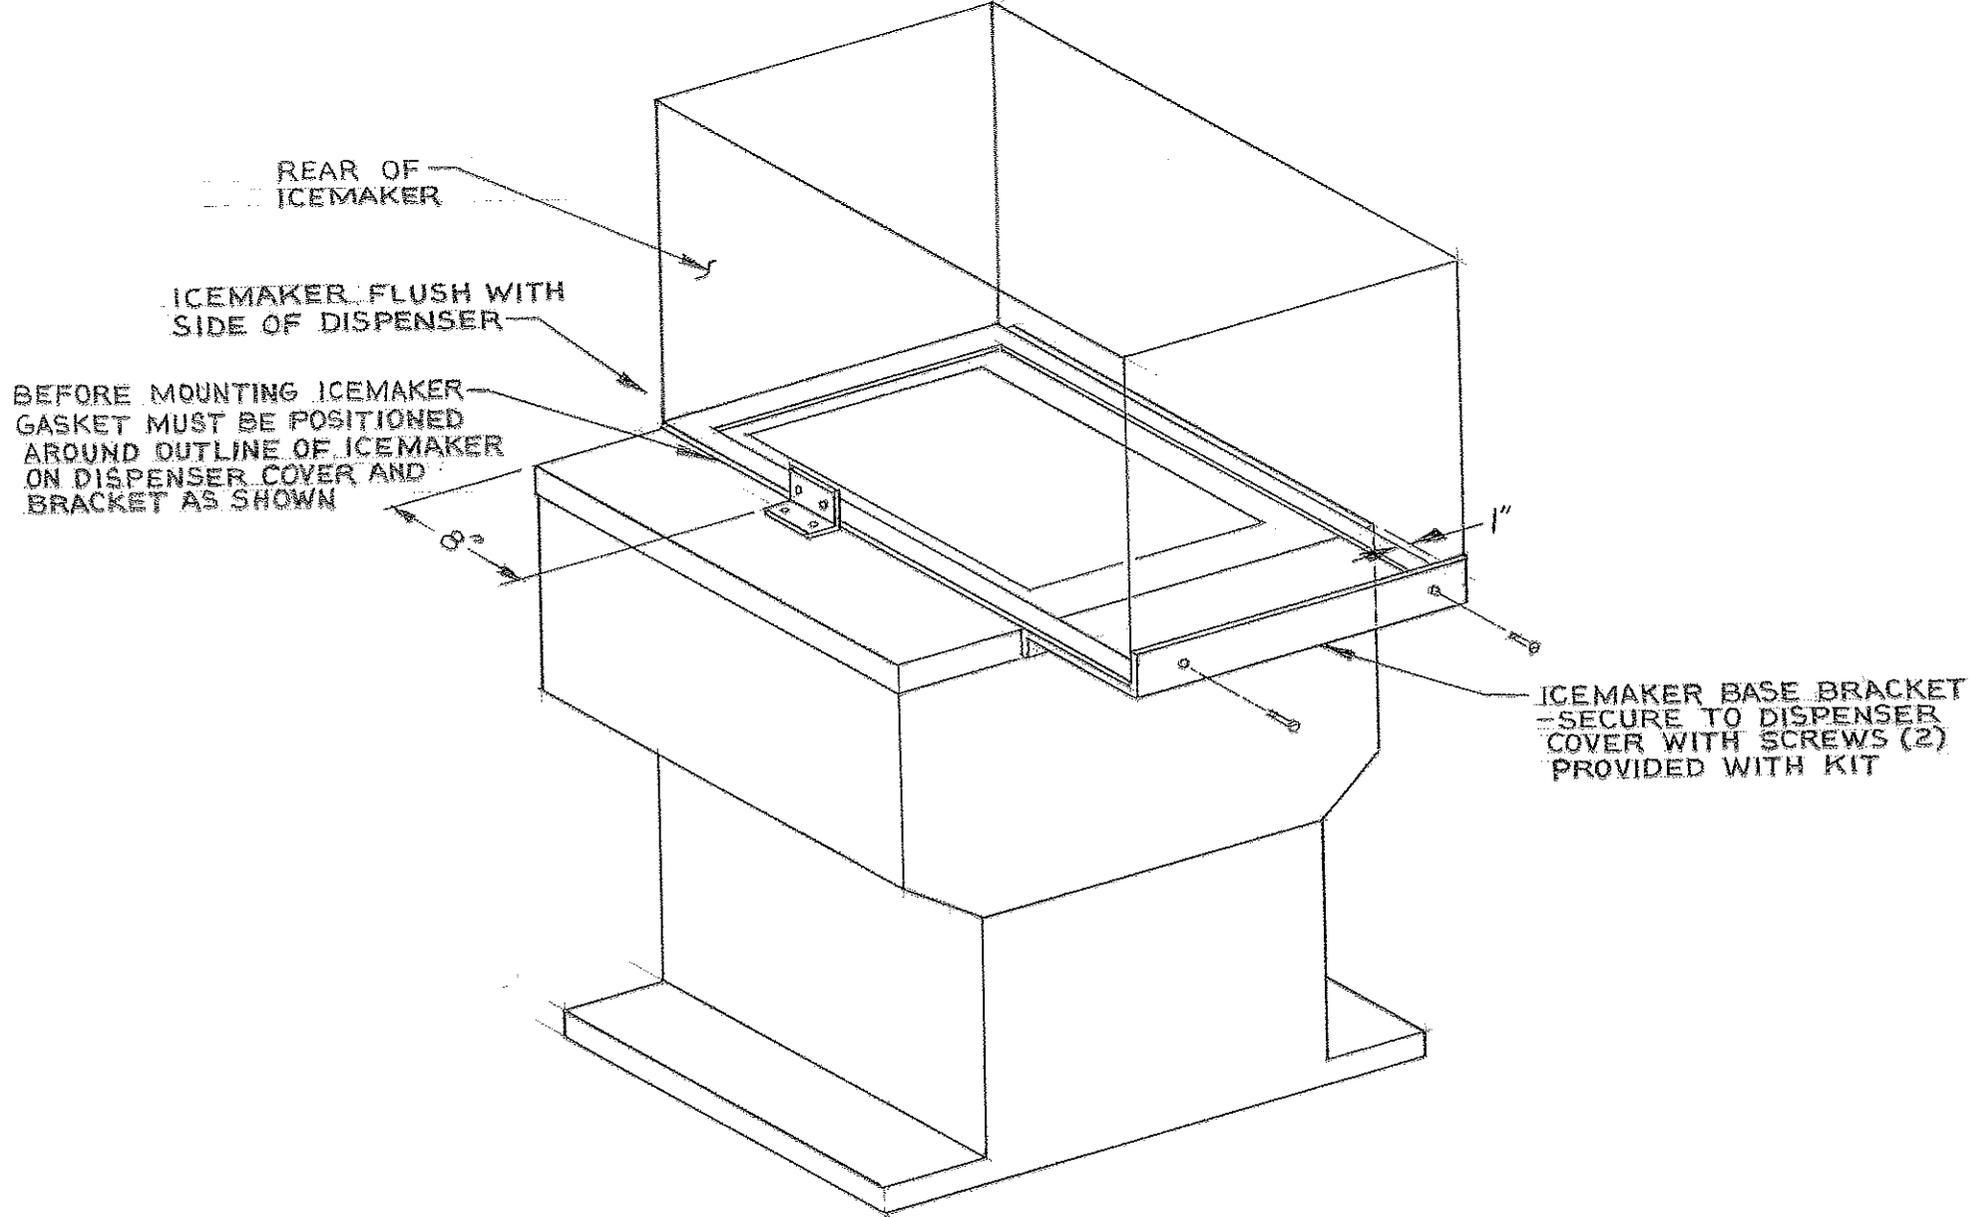


FIG. 2


WIRING DIAGRAM

TJ90-DK DISPENSER

DANGER! ELECTRIC SHOCK HAZARD. DISCONNECT POWER BEFORE SERVICING UNIT

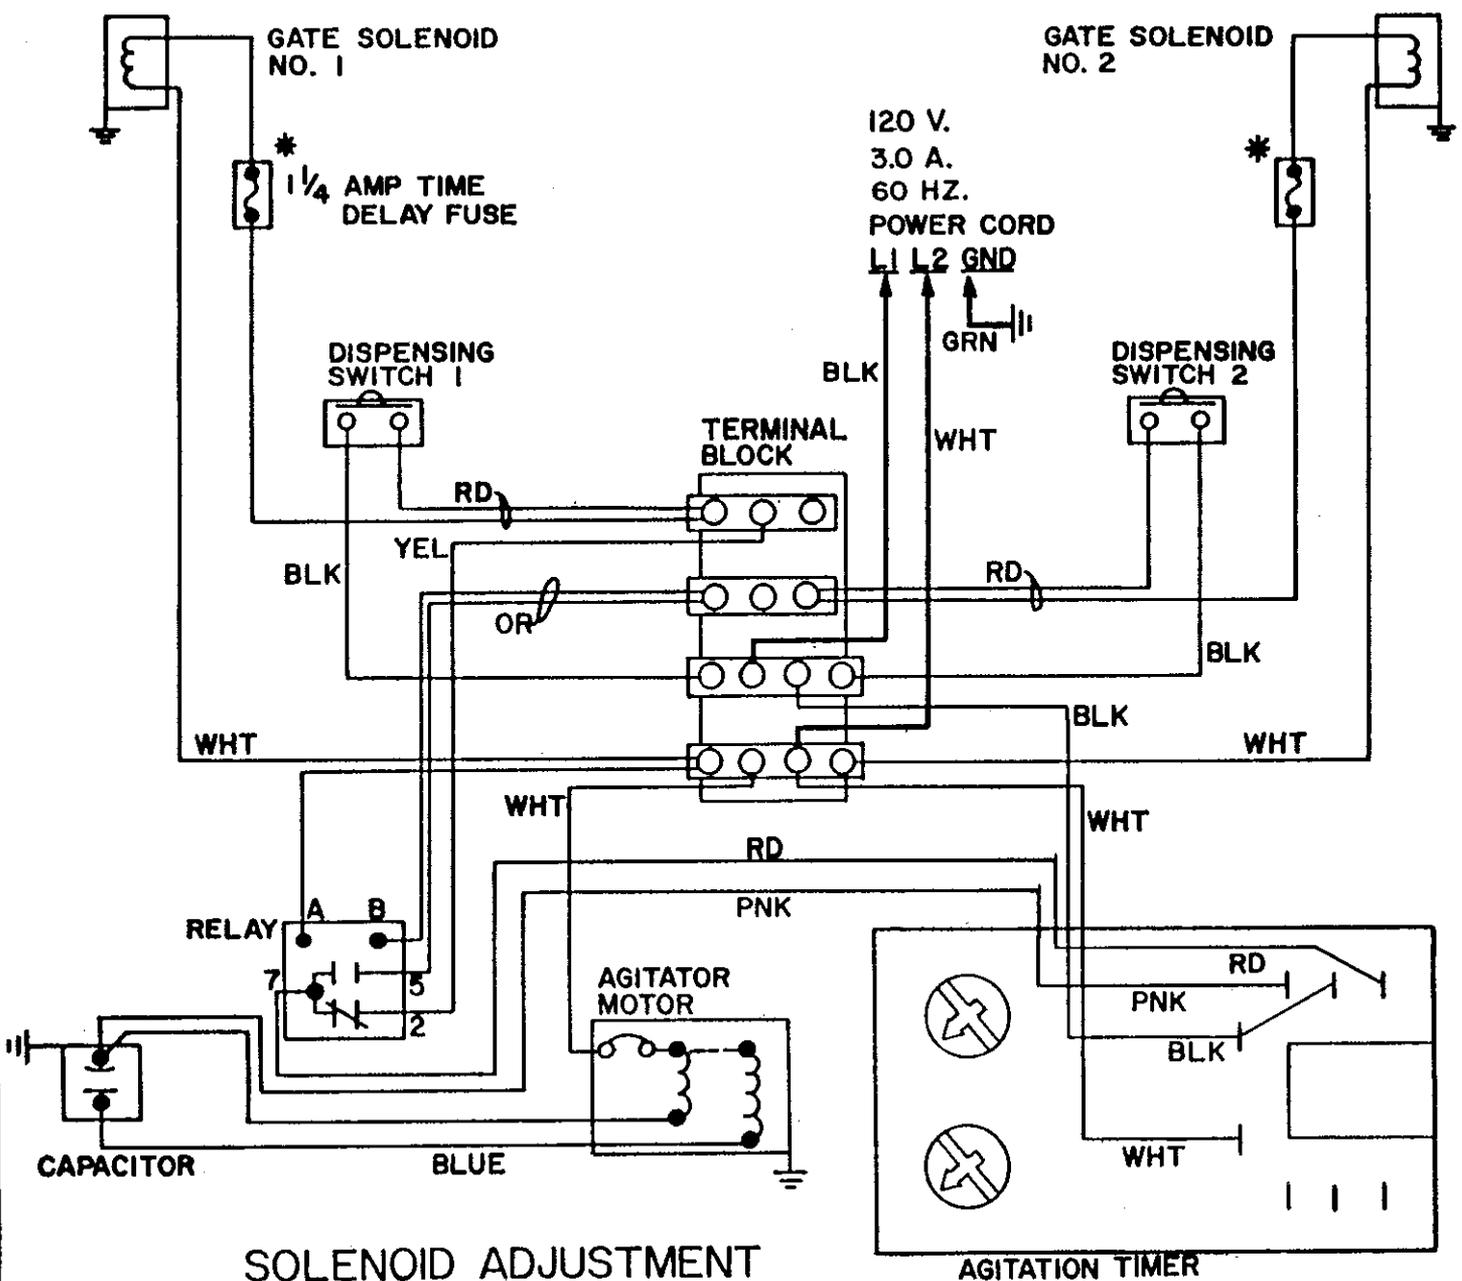

SOLENOID ADJUSTMENT

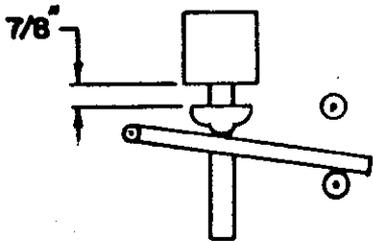

WHEN REPLACING SOLENOID, ADJUST TO 7/8" AS SHOWN BEFORE TIGHTENING MOUNTING SCREWS.

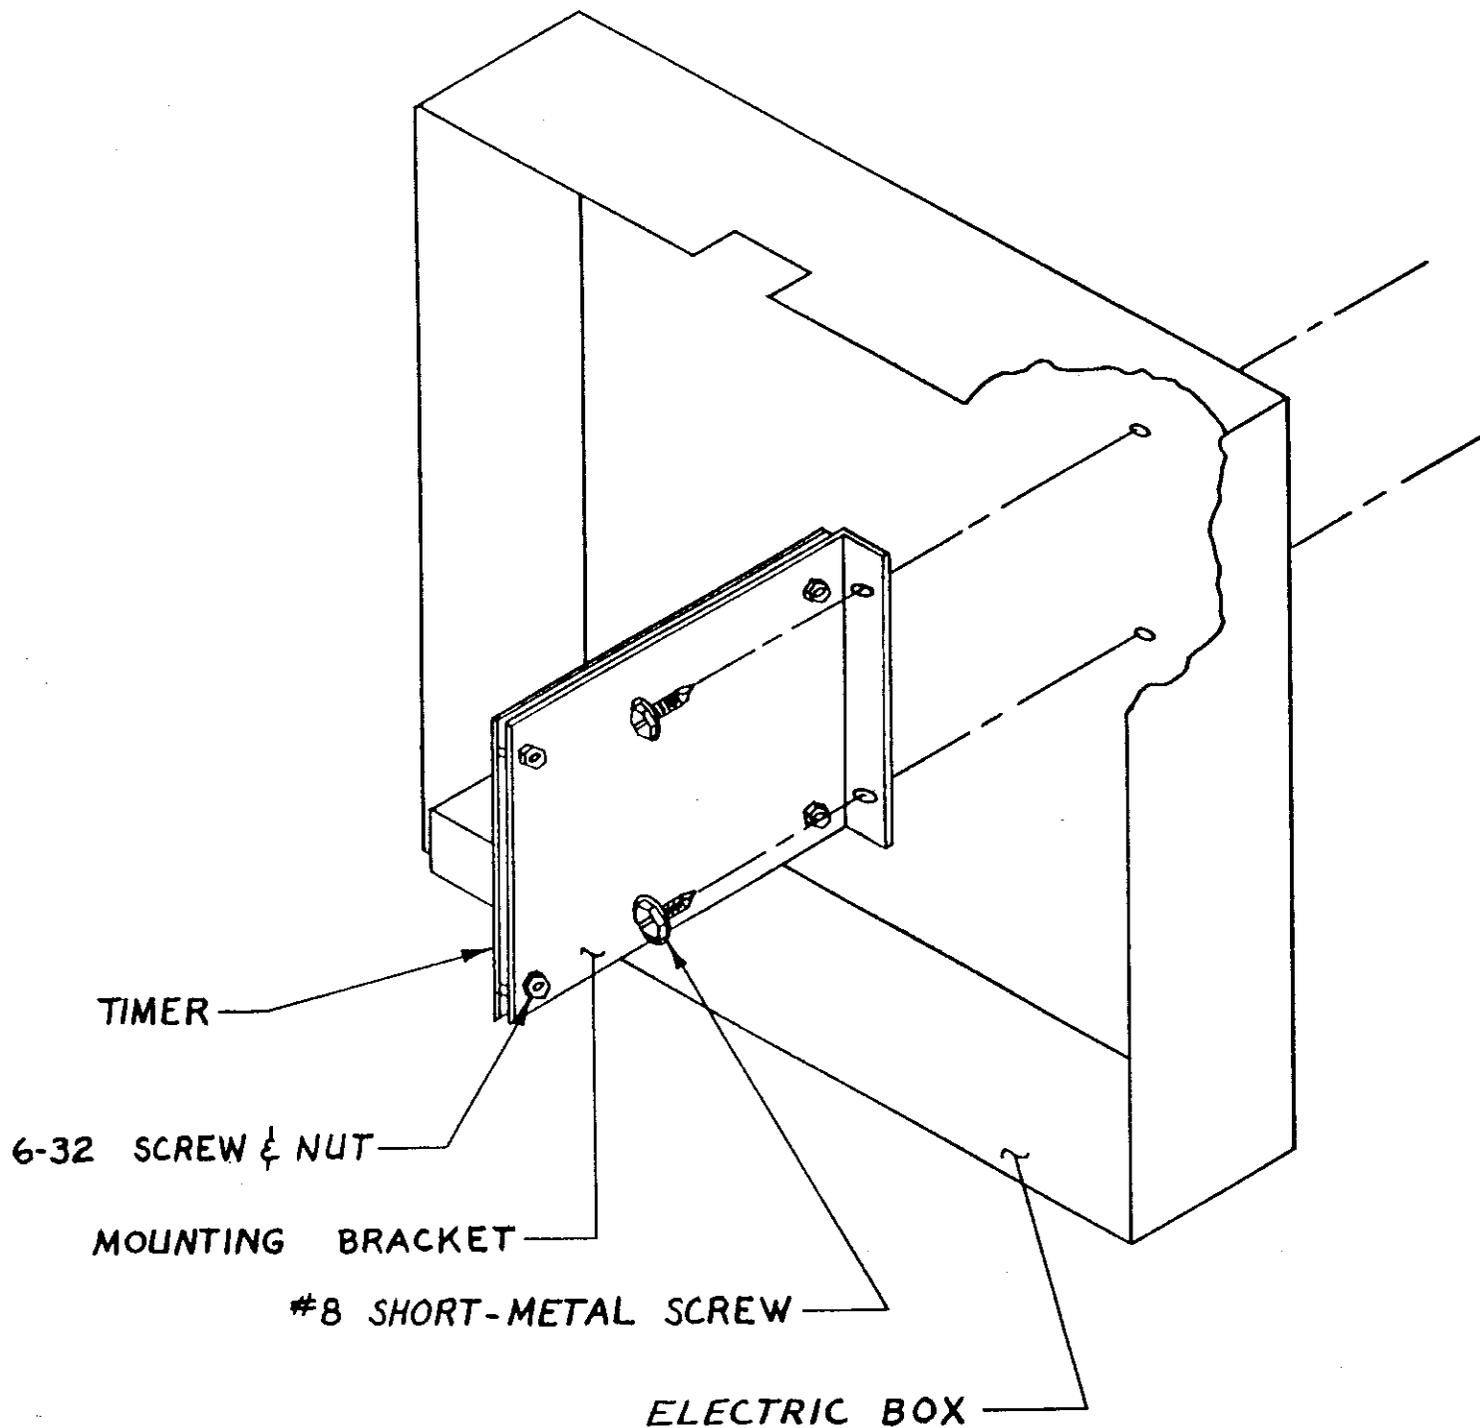


FIG. 4