

WEKA TANK LEVEL INSTRUMENT (TLI):

- Pressures from **vacuum to 500 bar**
- Densities **down to 0,27 g/cm³**
- **No maintenance** (fit and forget)
- Certified according **CE, EAC, Pattern Approval, ABS, BV, DNV-GL, LR, RINA, RMRS ...**

Application

Oil & Gas Industry


Petrochemical Industry

Chemical & Pharmaceutical Industry



Power Industry

Shipbuilding & Marine Industry

Water Management

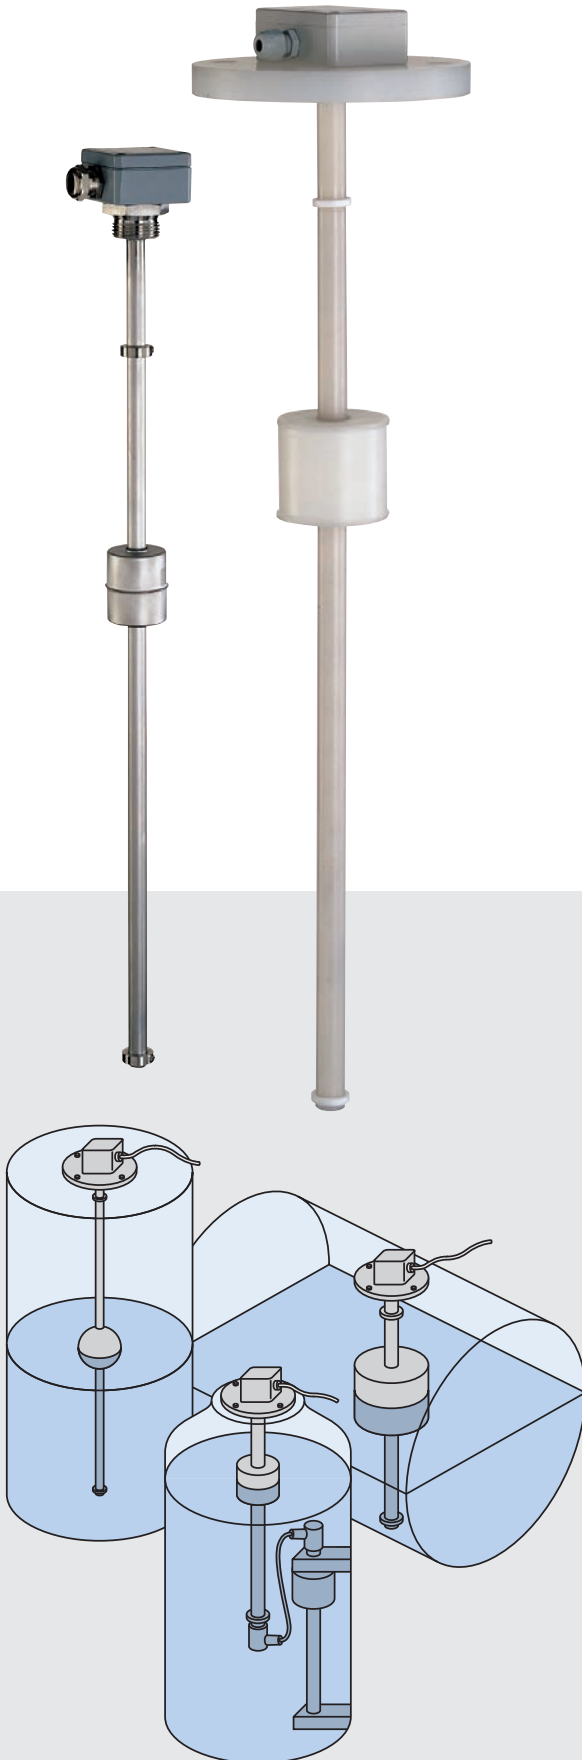

Combination of several TLIs

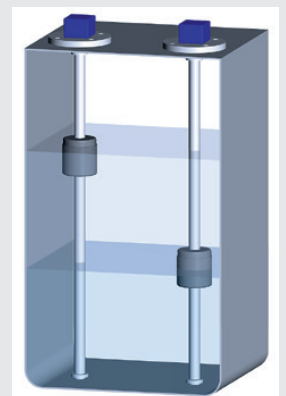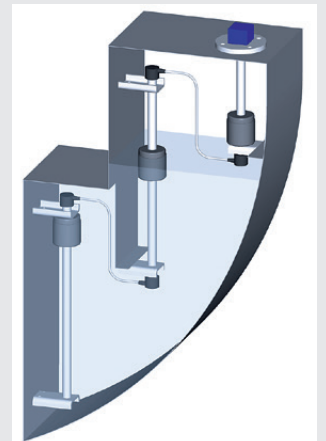

Certified according
ISO 9001




Certified according
PED

ZELMEX

Certified according
ATEX/IECEx


Modular Design

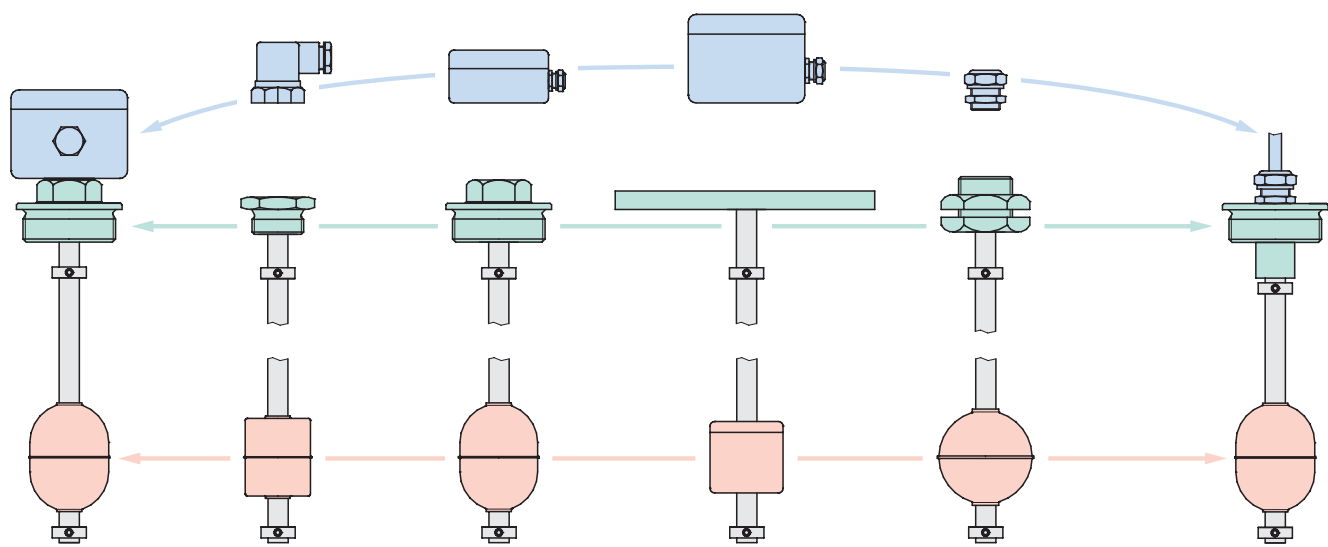

Technical Data	Type XM-/XT-800E	Type XM-/XT-825E	Type XT-800R
Resolution	5 mm	2.5 mm	5 mm
Tube size	OD 13 mm	OD 13 mm	OD 13 mm
Max. length	3 m	1.5 m	3 m
Material	brass, 316/316L	brass, 316/316L	316/316L

Operating Principle:

- Makes use of Reed switches tapped in regular intervals
- They get activated in 2-3-2 sequence producing voltage signal
- Can be converted to desired signal using WEKA Converter

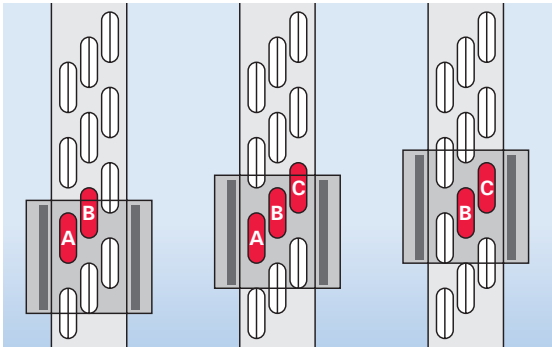

Toshniwal Hyvac Pvt. Ltd

Chennai	: 267, Kilpauk Garden Road, Chennai - 600 010. India. Tel: +91 44 26448983, 26448558 / Email: sales@toshniwal.net / www.toshniwal.net	
Bangalore	: Tel: +91 80 23519620	Email: bangalore@toshniwal.net
Delhi	: Tel: +91 11 26211134	Email: delhi@toshniwal.net
Hyderabad	: Tel: +91 40 23321631	Email: hyderabad@toshniwal.net
Kolkata	: Tel: +91 33 24740989	Email: kolkata@toshniwal.net
Mumbai	: Tel: +91 22 26591166	Email: mumbai@toshniwal.net
Vadodara	: Tel: +91 265 2987538	Email: baroda@toshniwal.net