





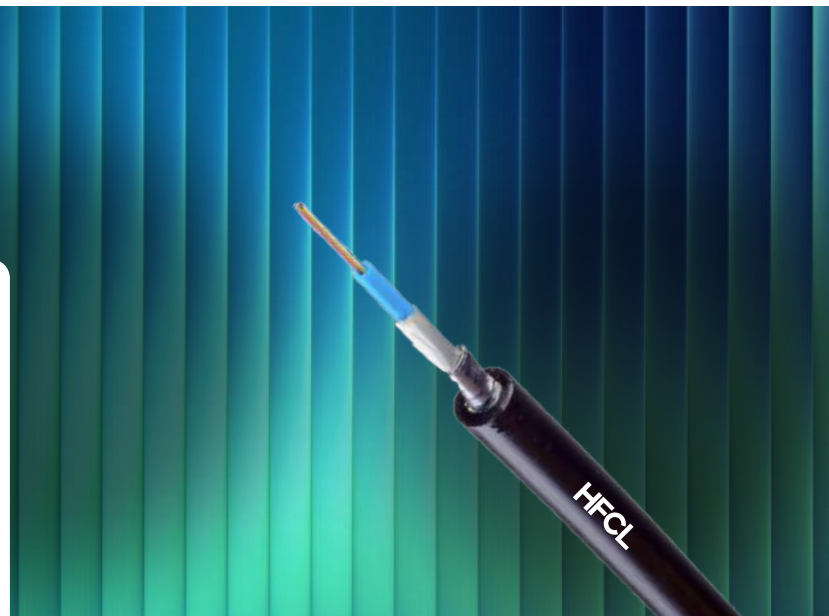



Arm Unitube Steel Tape

ARM-UT-CST

-  CATV
-  Aerial Short Span
-  Feeder and Distribution
-  Access Network
-  Last Mile
-  LAN & FTTX




Unitube Armoured With Glass Yarns

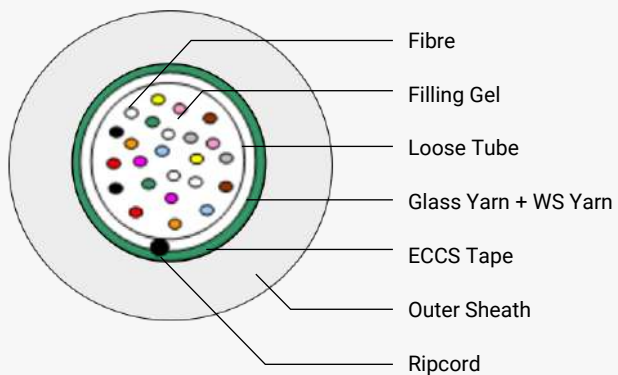


Customized Options

- Single Mode and Multimode Fibres
- Outer Sheath in LDPE/MDPE/LSZH
- Desired Sheath Colour
- Embedded with FRP Rod
- Enhanced Tensile performance


Temperature Performance(°C)



Installation



Operation



Storage

Unitube Armoured With Glass Yarns

Type	Fibre Count	Fibre/ Tube	Diameter (MM)	Weight (KG/KM)	Tensile Strength (N)		Crush	Bending Radius	
					I	O		I	O
1 Tx 2F	2	2	8.2 ± 0.5	65.0 ± 5	1000	750	2000 N/10 CM	10 X D	20 X D
1 T X 4F	4	4	8.2 ± 0.5	65.0 ± 5	1000	750			
1 T X 6F	6	6	8.2 ± 0.5	65.0 ± 5	1000	750			
1 T X 8F	8	8	8.2 ± 0.5	65.0 ± 5	1000	750			
1T X 12F	12	12	8.2 ± 0.5	65.0 ± 5	1000	750			
1T X 16F	16	16	8.5 ± 0.5	75.0 ± 10	1000	750			
1T X 24F	24	24	9.2 ± 0.5	90.0 ± 10	1200	1000			
1T X 48F	48	48	10.0 ± 0.5	95.0 ± 10	1200	1000			
I - Installation		O - Operational		D - Cable Diameter					