



Screen Unit(HALF SCREEN)

HALF SCREEN is a compact, clog-free wastewater screening unit that requires no wash water and offers easy operation and maintenance, making it suitable for a wide range of applications from slaughterhouses and seafood processing plants to municipal wastewater facilities and space-constrained sites such as small food factories and restaurants.

Open Type

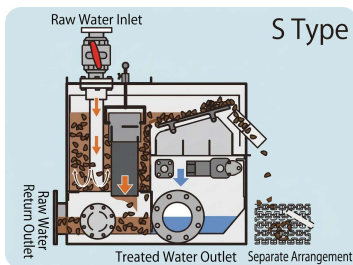

Close Type

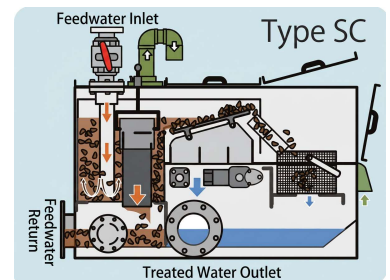

Model	Width of screen (mm)	Treatment Capacity(m ³ /h)			Weight (kg)	Motor (kW)	Dimension (mm)
		Normal Wastewater	High- concentrated	Ultra- concentrated			
DC-250S	250	32	20	8	80	0.06	1045 × 695 × 850
DC-250SC					145		1250 × 695 × 900
DS-500S	500	64	40	16	135	0.1	1115 × 945 × 930
DS-500SC					240		1300 × 945 × 980
DS-75-S	750	96	60	24	190	0.2	1235 × 1315 × 1220
DS-750SC					270		1480 × 1315 × 1350
DS-1000S	1000	128	80	32	250	0.2	1235 × 1565 × 1220
DS-1000SC					350		1480 × 1565 × 1350



- ①, ② Potato processing ③, ⑤ Seafood processing ④ Confectionery factory ⑥ Dairy wastewater ⑦ Slaughterhouse
⑧ Cleaning company wastewater ⑨ Prepared food wastewater