

FOX 211 DIGITAL



INCLUDED

23000350 · MIG torch ERGO PLUS 25 · 3 m

43210132 · Ground cable · 25mm² · 3 m

43205098 · MMA welding cable · 16mm² · 3 m

22905090 · Pressure regulator ECO Mini CO₂

22910014 · Adaptor for gas bottle

33805101 · Drive rolls Ø 30mm · 0,8 - 1,0 mm



OPTIONAL

23020154 · TIG Torch Eurotig 26V · 4m with gas valve · conn. 50mm²

99900195 · Trolley

99900258 · HD AIR Trolley



	FOX 211		
Input voltage	(1ph) 230V 50/60Hz		
Power 60%	5,5 KVA		
	MMA	TIG	MIG
U _o	65 V	65 V	35 V
Amp. Min-Max	5 ÷ 200 A	5 ÷ 200 A	20 ÷ 200 A
Duty Cycle 40°C	200A @ 35% 120A @ 100%	200A @ 35% 120A @ 100%	200A @ 35% 140A @ 100%
Steel	0,6 + 1,0 Ø mm		
Stainless Steel	0,8 + 1,0 Ø mm		
Flux Core	0,9 Ø mm		
Aluminium	0,8 + 1,0 Ø mm		
Brazing	0,8 + 1,0 Ø mm		
Ø Electrode	1,6 ÷ 5,0 Ø mm		
Electrode Type	6013 - 7018 - CrNi		
Insulation	H		
Protec. Degree	IP22S		
Dimens. (LxWxH)	480x220x385 mm		
Box (LxWxH)	685x275x450 mm		
Weight box/net	23 / 19 Kg		
Code	99820053		


Fox

MULTIPROCESS INVERTERS

**REAR CABLE
WRAP HOLDER**

**CABLES
LOCK**

**GAS
NO GAS**

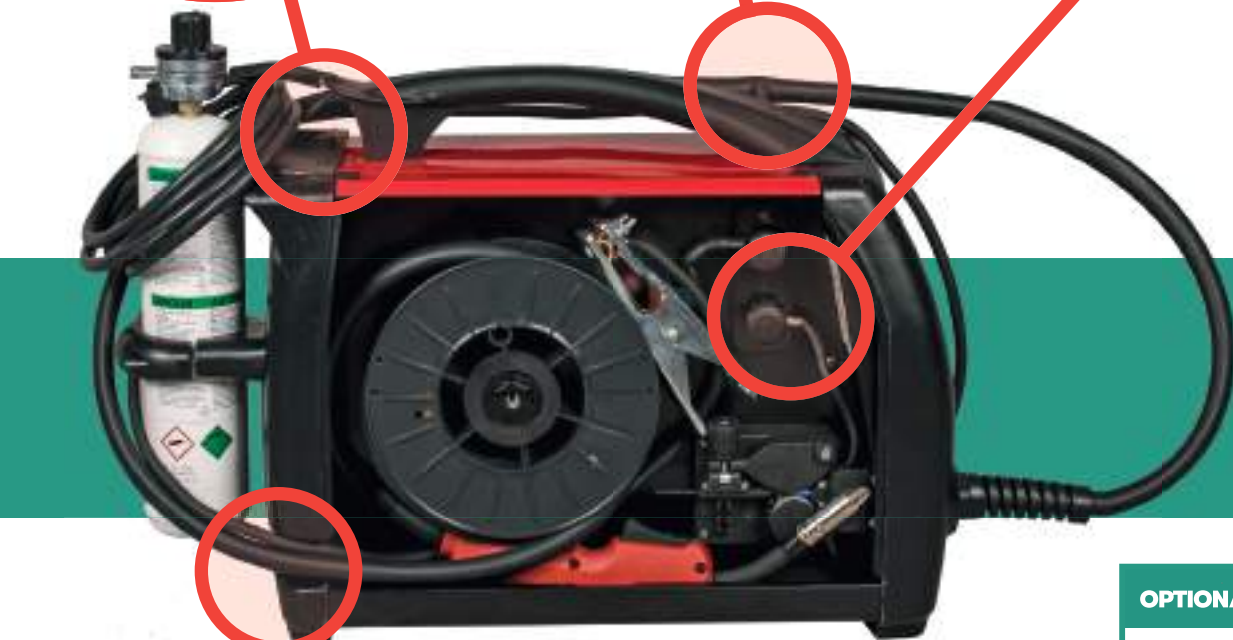

OPTIONAL "FULL GAS"



Trolley

99900195

OPTIONAL "EASY GAS"

Gas regulator



22905001

Disposable Gas
cylinders



Plastic Support



04600404

**ON BOARD MIG
GUN STORAGE**

**EASY TO
CARRY**