


TECHNICAL DATA SHEET

PARQUET

TROMEĐA SBB D.O.O. ČELINAC. TWO-LAYER AND THREE-LAYER PARQUET IN OAK, ASH, BEECH AND ROBINIA, FROM OUR OWN PROCESSING.

01

SPECIFICATION

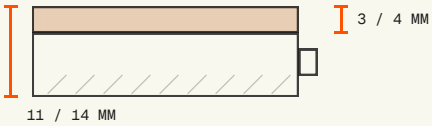

WOOD SPECIES	OAK, ASH, BEECH, ROBINIA
CONSTRUCTION	TWO-LAYER AND THREE-LAYER
PARQUET THICKNESS	11 AND 14 MM
WEAR LAYER	3 AND 4 MM
WIDTHS	90, 120, 140, 160, 180, 200, 220 MM
LENGTHS	500 TO 2,400 MM, DEPENDING ON WIDTH (SEE TABLE BELOW)
MOISTURE CONTENT	6 TO 8%
GRADES	SELECT, NATUR, RUSTIC, RUSTIC D
FINISH	SANDED, P150 GRIT
JOINT	TONGUE AND GROOVE

02

LENGTHS BY WIDTH

WIDTH	MINIMUM LENGTH	MAXIMUM LENGTH
90 MM	500 MM	1,200 MM
120 MM	800 MM	2,000 MM
140, 160, 180, 200 AND 220 MM	1,000 MM	2,400 MM

03

GRADES

01 SELECT
CALM GRAIN WITH NO KNOTS.

02 NATUR
NATURAL TEXTURE WITH SMALL KNOTS.

03 RUSTIC AND RUSTIC D
STRONG GRAIN AND LARGER KNOTS.

04

PRODUCTION AND ORIGIN

PRIMARY CUTTING, THIN SAWING, DRYING AND FINISHING ALL HAPPEN IN THE SAME PLANT, ON OUR OWN MACHINES. LAMELLAS ARE DRIED IN OUR OWN KILNS TO A MOISTURE CONTENT OF 6 TO 8%.

LOGS COME FROM ŠUME REPUBLIKE SRPSKE AND HRVATSKE ŠUME, WITH A FOREST DISPATCH NOTE FOR EVERY DELIVERY. OUR PROCESSING IS COVERED BY AN FSC CHAIN OF CUSTODY CERTIFICATE, LICENCE CODE FSC-C144170, VALID UNTIL 14 OCTOBER 2028.

05

OTHER SIZES AND GRADES

WE MAKE SIZES AND GRADES NOT LISTED HERE BY ARRANGEMENT. SEND US YOUR SPECIFICATION AND WE WILL TELL YOU WHAT WE CAN DO.

06

CONTACT

TROMEĐA SBB D.O.O.
DUBRAVA STARA BB, 78240 ČELINAC, BOSNIA AND HERZEGOVINA

EMAIL
INFO@TROMEDJA-SBB.COM

PHONE
+387 51 564 740

MOBILE
+387 65 346 559